INCH-POUND

A-A-52132
October 29, 1993

COMMERCIAL ITEM DESCRIPTION

HOTPLATES, ELECTRIC

The General Services Administration has authorized the use of this Commercial Item Description in preference to W-H-636.

1. ABSTRACT

1.1 Abstract. This commercial item description covers electric hotplates in the following types, styles, and sizes:

Type I - with power cord for portable use
Type II - with outlet for permanent connection

Style 1 - one heating unit hotplate
Style 2 - two heating unit hotplate

Size 1 - 1000 - 1050 watts (each unit)
Size 2 - 1200 - 1700 watts (each unit)
Size 3 - 2000 - 2600 watts (each unit)

1.2 CID based part identification number (PIN). A document based PIN to identify sizes of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The design and construction of the hotplate shall be in accordance with UL Standards 197 and 1030 and NSF International Standard No. 4. The hotplates shall be designed for use on counter tops, with controls on the front panel. Each unit shall be activated by an ON-OFF

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.

switch with an integral temperature control and a red light for each control to indicate whether the unit is on or off. Removable drip pans shall be located under each unit. Heating units shall be either enclosed helical coil or solid plate type. Tops of heating units shall be capable of supporting flat bottom cooking or heating vessels. Hotplate tops and bodies shall be fabricated of 300 series stainless steel. Provisions shall be made to allow for adjustment, service and replacement of all components without major disassembly. Hotplates shall be 16 inches wide (maximum), 27 inches deep (front to back) (maximum), and 13 inches high (without legs) (maximum). Hotplates shall rest on stainless steel or aluminum legs.

2.1.1 Electrical characteristics. The hotplates shall be designed for operation on the following electrical characteristics:

Types I & II, style 1, sizes 1 & 2	- 120 V, single-phase, 60 Hz
Types I & II, style 1, size 3 and Types I & II, style 2, sizes 1 & 2	- 208 V, single-phase, 60 Hz
Types I & II, style 2, size 3	- 208 V, three-phase, 60 Hz

Type I hotplates shall be supplied with a power cord not less than six feet long with a grounding conductor and a NEMA approved connector plug.

2.1.2 Standard compliance. Hotplates shall comply with NSF International Standard No. 4, Underwriters Laboratories (UL) Standards No. 197 and 1030, National Fire Protection Association (NFPA) Standard No. 70, and NEMA standards.

2.2 Data nameplate ("Government unique" requirement). The hotplates shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the hotplate by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the hotplate.

2.3 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.4 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.5 Workmanship. The finished hotplates shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the hotplate conforms to the requirements of NSF International Standard No. 4, UL Standard No. 197, and No. 1030, NFPA Standard No. 70, and NEMA standards, as applicable (see 2.1.1 and 2.1.2).

3.2.1 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard No. 197 and No. 1030 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standard No. 197 and No. 1030.

3.2.2 NSF International. Acceptable evidence of meeting the requirements of NSF International Standard No. 4 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.3 National Electrical Manufacturers Association (NEMA). The contractor shall submit to the contracting officer a written certificate of compliance as proof that the hotplates meet the applicable requirements of NEMA.

3.2.4 National Fire Protection Association (NFPA). The contractor shall submit to the contracting officer a written certificate of compliance as proof the hotplates meet the applicable requirements of NFPA.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial.

4.2 Commercial packaging and packing. The hotplates shall be packaged and packed in accordance with ASTM D 3951.

4.3 Marking. Interior boxes and shipping containers shall be marked in accordance with MIL-STD-129.

5. NOTES

5.1 Intended use. The hotplates covered by this commercial item description are intended for use in the preparation of foods, keeping food warm, preparation of hot beverages, and also for certain laboratory purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type, style, and size (see 1.1, 1.2, and 5.4).
c. Government approved manual number to be included on data nameplate (see 2.2).
d. Selection of applicable packaging and packing required (see 4.1).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NEMA documents are available from:

National Electrical Manufacturers Association (NEMA)
2101 L Street, NW
Washington, DC 20037

NFPA standards are available from:

National Fire Protection Association
Batterymarch Park
Quincy, MA 02269

NSF International Standard No. 4 - Commercial Cooking and Hot Food Storage Equipment

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standards are available from:


Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

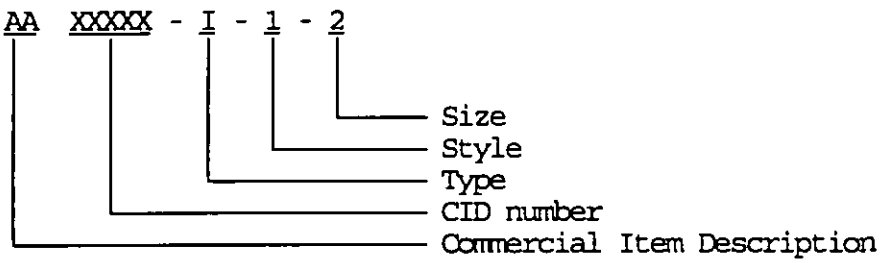

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 99

Review Activities

Army - MD, QM
Navy - CG, SH
Air Force - 50, 84
DLA - GS

User Activity

Navy - MC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7310-0824

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.