INCH-POUND

A-A-52137
December 15, 1993

COMMERCIAL ITEM DESCRIPTION

CABINETS, FOOD SERVICE, REFRIGERATOR-WARMER, ROLL-THROUGH, ROLL-IN

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-C-43427.

1. ABSTRACT

1.1 Abstract. This commercial item description covers roll-in, roll-through refrigerator-warmer, food service cabinets in the following types, classes, styles, and models (see 5.2):

Type I - Refrigerator cabinet

Class 1 - Single cabinet
Class 2 - Double cabinet
Class 3 - Triple cabinet

Type II - Warmer cabinet

Class 1 - Single cabinet
Class 2 - Double cabinet
Class 3 - Triple cabinet

Style A - Non-insulated, stainless steel bottom with wall type cart guides

Style D - Bottomless cabinet with wall type cart guides

Model A - Roll-in
Model B - Roll-through

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data which may improve this document should be sent to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 4110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

1.2 CID based part identification number (PIN). A document based PIN to identify type, class, style, and model of items is included in section 5. This identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor except as information on "Government unique" data nameplates (see 5.4).

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The cabinets shall be designed as integral free standing units in the types, classes, styles, and models specified (see 1.1). All cabinets shall be equipped with interior lights, thermometers, and all controls necessary for automatically maintaining the selected temperature. The refrigerator cabinets shall maintain a temperature of $38^{\circ}F \pm 2^{\circ}F$, and the warmer cabinets shall maintain a temperature of $150^{\circ}F$ to $160^{\circ}F$. The refrigeration system shall be housed in the top of the cabinet. The door opening of each section shall be 26 to 28 inches wide and 65 to 68 inches high. The cabinets shall be 89 inches high (maximum), 39 inches wide (each section, maximum), and 39 inches deep (maximum) for Model A cabinets or 42 inches deep (maximum) for Model B cabinets. The inner liner, outer shell, floor (when applicable), and doors shall be fabricated of 20 gauge (minimum), 300 series stainless steel. The space between the inner liner and the outer shell, including doors, shall be fully insulated. All major assemblies and installed attachments shall be accessible for maintenance, repair, or replacement. Removable access covers and plates shall be provided to permit adjustment, service, and replacement of parts without the need to remove or disassemble other major assemblies. When specified, removable bumpers shall be furnished on cabinets (front and sides only) (see 5.2).

2.1.1 Electrical requirements. Unless otherwise specified, electrical components shall be nominal 115, 208, or 230 V, single-phase, 60 Hz frequency (see 5.2). The cabinets shall operate on 115, 208, or 230 V; single-phase; 50 or 60 Hz as specified (see 5.2). Transformers shall not be used to step-up or step-down the voltage for cabinet or condenser unit use, but are permitted as part of the control system (see 2.1.2). When 50 Hz frequency is specified, and the cabinets are to be operated on that frequency, all motors shall be rated at that freqency. A six foot (minimum) power cord terminated with a National Electrical Manufacturers Association (NEMA) three prong grounded plug shall be provided with the cabinet. The cabinets shall be furnished completely wired and ready for connection to the power source.

2.1.2 Refrigerator system (type I cabinets). The cabinets shall use air cooled, self-contained, hermetic type compressor, condenser, and evaporator assembly which shall be top mounted (see 2.1). The refrigeration system shall operate on 115, 208, or 230 V; single-phase; 50 or 60 Hz, as specified (see 5.2). The use of a transformer to obtain specified voltage for the condensing unit is prohibited. Controls shall be designed to operate on a 115, 208, or 230 V, single-phase, 60 Hz system. Controls rated at a 115 V,

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.

single-phase, 60 Hz system may be used with a 50 Hz frequency system provided that the power is obtained from either a hot line and neutral, or through a transformer and that the overall performance of the system is not affected.

2.1.3 Electromagnetic compatibility ("Government unique" requirement). When specified, the cabinets shall be designed for electromagnetic compatibility in accordance with tables I and II of MIL-STD-461 (see 5.2).

2.1.4 Ozone depleting substances. Class I ozone depleting substances, in accordance with section 602(a) of the Clean Air Act Amendments 1990, 42 USC 7671a(a) as implemented by 40 CRF 82, Protection of Stratospheric Ozone, shall not be used for refrigerant gases, or for any other purpose, or employed in any process associated with the manufacture of any component parts for this item. See 5.6 for additional information.

2.2 Standard compliance. The cabinets shall comply with NSF International Standards No. 4 and No. 7; Underwriters Laboratory (UL) Standards No. 62, 197, 303, and 471 (see 3.3); and NEMA.

2.3 Mobile racks. The manufacturer shall supply a mobile rack for each cabinet or section for each particular design of cabinet.

2.4 Instruction plate. Instruction plates shall be made of stainless steel and shall have the wiring diagram, refrigerator cycle diagram, instruction for start-up, operation, shutdown, preventative maintenance, and the type of refrigerant.

2.5 Data nameplate ("Government unique" requirement). The cabinets shall be furnished with a data nameplate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying, (b) Identification tags, (c) Information not required, and (d) Optional marking information shall not apply. The data nameplate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the cabinet by rivets, screws, or welding in such a manner as to meet the applicable NSF International sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved, or applied by photosensitive means:

Contract Number
National Stock Number
Procurement Instrument Identification Number
CID Based Part Identification Number (PIN)
Manufacturer's Name, Address, and Telephone Number
Supplier's Name, Address, and Telephone Number (List Only if Different from Manufacturer)
Manufacturer's Model and Serial Number
Government Approved Manual Number (see 5.2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:07Z
Check the source to verify that this is the current version before use.

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the cabinet.

2.6 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

2.7 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

2.8 Workmanship. The finished cabinets shall be complete, clean, and free of fabrication marks, scratches, dents, sharp edges, sharp corners, burrs, slivers, or visible evidence of rust. Rivets, when used, shall be tight and the rivet heads and peened ends shall be round and concentric and in full contact with the joined metal surfaces. There shall be no empty rivet holes. Welds shall be clean, continuous, sound, and free of flux, pits, buildups, undercuts, and shall be ground so as to blend with the adjacent surfaces. Spot welds shall be free from pits, burn throughs, and flashes.

3. QUALITY ASSURANCE

3.1 Contractor certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of this commercial item description and except for those Government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same product offered for sale in the commercial marketplace or that had successfully been delivered to the Government on a previous contract or purchase order. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

3.2 Compliance. Prior to approval of the first shipment, the contractor shall submit satisfactory evidence to the contracting officer or his authorized representative that the cabinet conforms to the requirements of NSF International Standards No. 4 and No. 7; UL Standards No. 62, No. 197, No. 303, and No. 471; and NEMA, as applicable.

3.2.1 NSF International. Acceptable evidence of meeting the requirements of NSF International Standards No. 4 and 7 shall be a listing in the current edition of the NSF International "Listing of Food Service Equipment" and display of the NSF International mark on the finished product, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable NSF International requirement(s).

3.2.2 Underwriters Laboratories, Inc. (UL). Acceptable evidence of meeting the requirements of UL Standard Nos. 62, 197, 303, and 471 shall be the UL listing mark, or a certified test report from a recognized independent laboratory acceptable to the Government indicating compliance with the applicable requirements of UL Standards Nos. 62, 197, 303, and 471.

3.2.3 National Electrical Manufacturers Association (NEMA). The contractor shall submit to the contracting officer a written certification of compliance as proof that the cabinets meet the applicable requirements of NEMA.

4. PACKING

4.1 Packaging and packing. Packaging and packing shall be commercial.

4.1.1 Commercial packaging. Each cabinet shall be cleaned, preserved, and packaged in accordance with ASTM D 3951.

4.1.2 Commercial packing. The cabinet shall be packed in accordance with ASTM D 3951.

5. NOTES

5.1 Intended use. The cabinets covered by this commercial item description are intended for holding food prior to serving. The refrigerator sections are intended for holding food at 38°F prior to serving. The food warmer sections are intended to hold food at warming temperatures from 150°F to 160°F prior to serving.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description.
b. PIN designating type, class, style, and model required (see 1.1, 1.2, and 5.4).
c. Whether removable bumpers are required (see 2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

d. Electrical component characteristics if other than those specified (see 2.1.1).
e. System voltage and frequencies required (see 2.1.1 and 2.1.2).
f. When electromagnetic capability is required (see 2.1.3).
g. Government approved manual number to be included on data nameplate (see 2.5).

5.3 Sources for documents.

5.3.1 Sources for non-Government association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging

ASTM documents are available from:

American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

NEMA documents are available from:

National Electrical Manufacturers Association (NEMA)
2101 L Street, NW
Washington, DC 20037

NSF International Standard No. 4 - Commercial Cooking Rethermalization and Powered Hot Food Holding and Transport Equipment
NSF International Standard No. 7 - Food Service Refrigerators and Storage Freezers

NSF International documents are available from:

NSF International
3475 Plymouth Road
P.O. Box 130140
Ann Arbor, MI 48113-0140

UL Standard No. 62 - Flexible Cord and Fixture Wiring
UL Standard No. 197 - Commercial Electric Cooking Appliances
UL Standard No. 303 - Refrigeration and Air Conditioning Condensing and Compressor Units
UL Standard No. 471 - Commercial Refrigerators and Freezers

UL standards are available from:


Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:07Z
Check the source to verify that this is the current version before use.

5.3.2 Source for Government documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.4 Part identification number (PIN). The PIN's to be used for items required by this CID are created as follows:

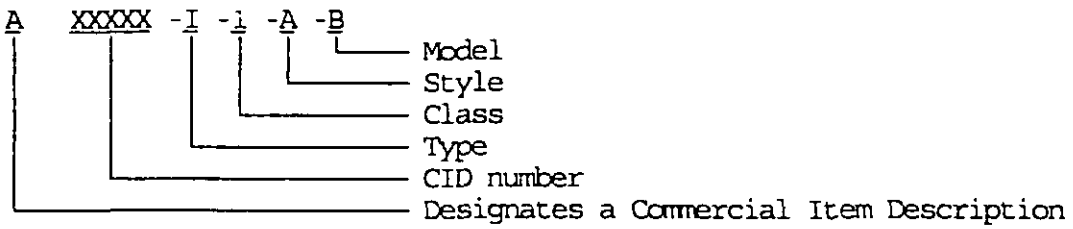

5.5 "Government unique" requirements. Whenever a "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

5.6 Ozone depleting substances. For current information about the status of the Environmental Protection Agency's (EPA) Significant New Alternatives Policy (SNAP) program and specific refrigerant alternatives, call the Stratospheric Ozone Protection Hotline at (800) 296-1996 or the SNAP Coordinator at (202) 233-9195. For published information see the EPA Stratospheric Ozone Protection, Fact Sheet (EPA-430-F-93-004 dated February 1993) Short List of Alternative Refrigerants and Action Guide (EPA-430-F-93-003), dated February 1993) Cooling & Refrigerating without CFCs.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - YD
Air Force - 99

Review Activities

Army - MD, QM
Navy - MC
Air Force - 50
DLA - GS

User Activities

Army - ME
Navy - SA

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 4110-0473

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:07Z
Check the source to verify that this is the current version before use.