[METRIC]

A-A-66B
January 6, 1994
SUPERSEDING
A-A-66A
December 4, 1991

COMMERCIAL ITEM DESCRIPTION

PUNCH, PAPER, HAND-HELD, OFFICE TYPE

This proposed Commercial Item Description has been approved by the General Services Administration.

1. SCOPE: This commercial item description covers hand-held office type paper punchers intended for punching holes in paper. Paper punchers shall be of the following types and sizes, as specified below.

Type A - Light duty
Type B - Heavy duty

Size 1 - For 3.18 mm (1/8") diameter holes
Size 2 - For 3.97 mm (5/32") diameter holes
Size 3 - For 4.76 mm (3/16") diameter holes
Size 4 - For 6.35 mm (1/4") diameter holes

2. SALIENT CHARACTERISTICS:

A. Construction. The puncher shall be a plier-type design activated by squeezing the handles together. The handles shall be curved to fit the hand in accordance with normal commercial practice. The Type A puncher's handles shall be knurled. The Type B puncher shall have a depth gauge and clipping receptacle (see Fig. 1 & 2), and its handles shall be plastic coated. Handles shall be spring loaded so that they return to the open position once compression on the handles is removed. The spring mechanism shall withstand repeated compressions without losing its resilience. The puncher shall be marked with the name or trademark of the manufacturer.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document, should be sent to: General Services Administration, Federal Supply Service, 26 Federal Plaza, New York N.Y. 10278 ATTN: Engineering Branch (2FYEE).


DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 7520

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

B. Dimensions. Type A punchers shall have an overall length of 13.34 ± 0.64 cm (5-1/4 ± 1/4)" and an overall width of 5.72 ± 0.64 cm (2-1/4 ± 1/4)". Type B punchers shall have an overall length of 14.6 ± 1.9 cm (5-3/4 ± 3/4)" and an overall width of 6.40 ± 0.64 cm (2-1/2 ± 1/4)". Thickness of the handles shall be in accordance with normal commercial practice. The puncher shall have a throat depth or reach of not less than 2.54 cm (1") when measured from the center of the die (or hole) to the edge of the material being punched. Type A punchers shall have a feed clearance of 3.18 ± 0.81 mm (0.125 ± 0.032)". Type B punchers shall have a feed clearance of 3.81 ± 0.81 mm (0.150 ± 0.032)". Size 1 punchers shall have a die diameter of 3.18 ± 0.40 mm (1/8 ± 1/64)". Size 2 punchers shall have a die diameter of 3.97 ± 0.40 mm (5/32 ± 1/64)". Size 3 punchers shall have a die diameter of 4.76 ± 0.40 mm (3/16 ± 1/64)". Size 4 punchers shall have a die diameter of 6.35 ± 0.40 mm (1/4 ± 1/64)" (see Fig. 1 & 2).


Fig.1 [METRIC]
Paper Puncher

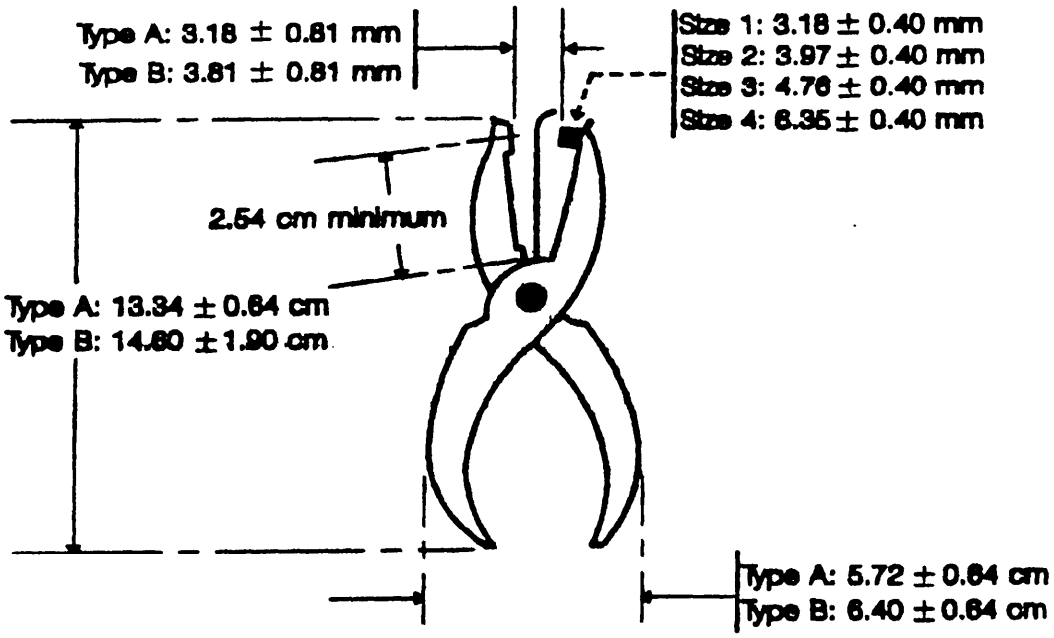

NOTE: The above displayed Fig.1 is intended for dimensional conformance and clarity purposes only. It is not intended to stipulate the particular design of the puncher or its components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

Fig.2 [INCH-POUND]
Paper Puncher

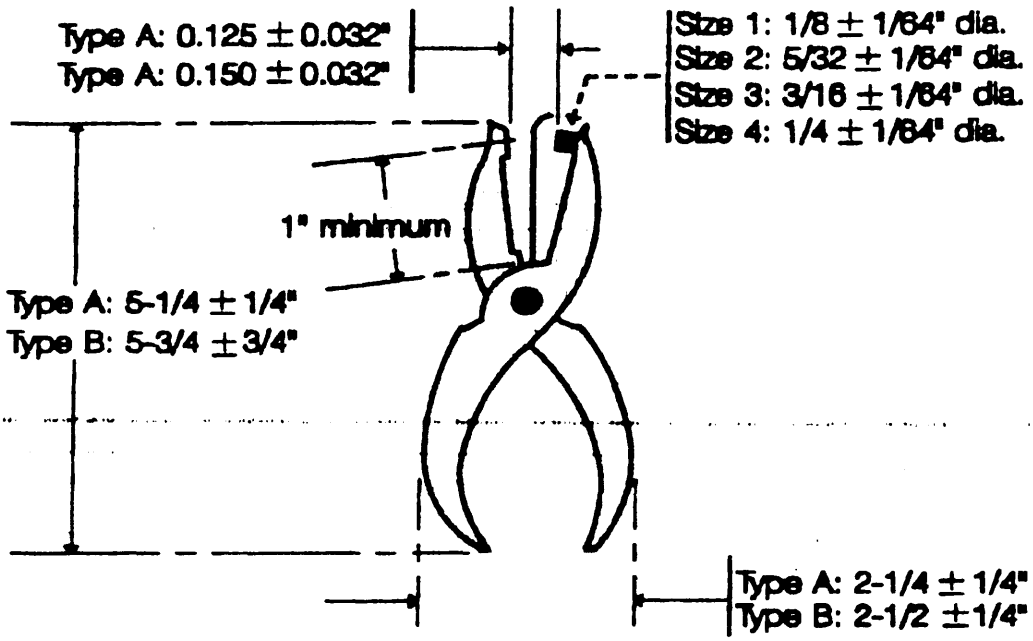

NOTE: The above displayed Fig.2 is intended for dimensional conformance and clarity purposes only. It is not intended to stipulate the particular design of the puncher or its components.

C. Materials. The spring mechanism shall be made of commercially available spring steel, and the handles shall be made of a normally used, for the function of that part, commercially available material. The die shall be made of steel which is hardened to Rockwell C50 or higher when tested in accordance with ASTM E 18. If case hardened, they shall be carburized, cyanided or nitraded. Surface plating shall be either nickel, minimum 0.00762 mm (0.0003") thickness; or, a combination of chromium, minimum 0.000762 mm (0.00003") thickness, used in conjunction with an electrodeposited underplate system of nickel, minimum 0.00508 mm (0.00020") thickness, for a total minimum plating thickness of 0.00584 mm (0.00023").

D. Performance. Punched holes shall be neither torn nor ragged and the puncher shall not experience any damage or jamming and continue to operate properly after being subjected to the performance testing specified in 3.D.

E. Workmanship. The punch shall be free of any defects that may affect its durability, appearance or cause injury to the end user. All exposed surfaces shall be free of sharp edges, burrs, scales, fins, or nodules.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

3. QUALITY ASSURANCE:

A. Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the Commercial Item Description, where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

B. Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

C. Sampling. Samples shall be selected for inspection in accordance with MIL-STD-105. A lot shall consist of a number of sample units manufactured by the same process from the same components at the same time. The sample unit shall be one puncher. Random samples shall be drawn from each lot for the end item inspection. The inspection level for dimensions, construction, materials, workmanship and testing shall be S-3 and the AQL shall be 4.0 percent defective.

D. Performance Testing.

(1). Type A punch shall be made to punch 50 holes through 1 sheet of 34 g/m^2 (18 lb$_m$, 17" x 22"-1000 sheets) basis weight bond paper, and 50 holes through 2 sheets of 0.241 mm, 62 g/m^2 (9.5 point, 33 lb$_m$, 17 " x 22" - 1000 sheets) basis weight kraft paper.

(2). Type B punch shall be made to punch 50 holes through 1 sheet of 34 g/m^2 (18 lb$_m$, 17" x 22"-1000 sheets) basis weight bond paper, and 50 holes through 4 sheets of 0.241 mm, 62 g/m^2 (9.5 point, 33 lb$_m$, 17 " x 22" - 1000 sheets) basis weight kraft paper.

4. REGULATORY REQUIREMENTS: The manufacturer is encouraged to use recovered materials in accordance Paragraph 23.403 of the Federal Acquisition Regulation.

5. PACKAGING, PACKING, AND MARKING: Packaging, packing, and marking shall be as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

6. REFERENCED DOCUMENTS: The issue of the referenced documents in effect on the date of the solicitation for offers or request for proposals shall be used to determine conformance with the requirements of this Commercial Item Description.

A. Federal Regulations:

Federal Acquisition Regulation. Paragraph 23.403

Copies of the U.S. Code may be obtained through the Congressional Sales Office, U.S. Government Printing Office, Washington, D.C. 20402.

B. Military Standard

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Available from: Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094, or as directed by the contracting officer.

C. ASTM References

ASTM E 18 - Standard Test Methods for Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials.

Available from: ASTM. 1916 Race Street, Philadelphia, PA 19103.

7. NOTES: Purchasers shall specify the following in the contract or purchase order.

A. Ordering data.

(1). Title, number, and date of this Commercial Item Description.
(2). Type and Size required.
(3). Unit of issue and quantity.
(4). Packaging, packing and marking required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.

B. Item Identifiers/Reference Part Number System
(for cataloging use only)

AA66 - 4 B

This example describes a Heavy Duty paper puncher capable of punching 6.35 mm (1/4") diameter holes.

A - Type A - Light Duty
B - Type B - Heavy Duty

1 - Size 1 - For 3.18 mm (1/8") diameter holes
2 - Size 2 - For 3.97 mm (5/32") diameter holes
3 - Size 3 - For 4.76 mm (3/16") diameter holes
4 - Size 4 - For 6.35 mm (1/4") diameter holes

MILITARY INTERESTS:

DoD has no registered interest in revisions and amendments to this Commercial Item Description until further notice.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:04Z
Check the source to verify that this is the current version before use.