MIL-C-36204(DM)
28 JANUARY 1965

MILITARY SPECIFICATION

CART, ORTHOPEDIC BED

1. SCOPE

1.1 This specification covers a mobile knockdown-type cart, suitable for supporting a Stryker turning frame orthopedic bed.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

FF-C-77	Casters, Institutional Duty.
QQ-A-225/5	Aluminum Alloy Bar, Rod, and Wire (Rolled or Drawn) 2017.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.

Military

MIL-L-10547	Liners, Case, and Sheet Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

Federal

Fed. Std. No. 66	Steel: Chemical Composition and Hardenability.
Fed. Test Method Std. No. 151	Metals; Test Methods.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material.

3.1.1 Steel. Steel used in the fabrication of the cart shall be minimum AISI 1010 conforming to Fed. Std. No. 66.

3.1.2 Aluminum. Aluminum rod used for the extension legs shall conform to QQ-A-225/5. Aluminum used for the side rail supports shall be good-grade casting aluminum.

3.2 Construction. The cart shall be constructed as shown on figure 1. Part numbers shown on the figure shall be as follows:

Part No.	Quantity required	Description
1	4	Upright
2	2	Crossbrace
3	4	Extension leg
4	2	Side rail
5	4	Side rail support
6	8	1/4-20 x 3/8 socket head set screw
7	4	Threadless pin
8	4	1/4-20 x 1/2 socket head set screw
9	4	Storage clip
10	4	1/4 x 20 x 3/16 socket head set screw
11	16	1/4-20 x 1/2 flathead machine screw
12	16	1/4-20 hex nut
13	16	Lock washers
14	2	10-24 roundhead machine screw
15	2	Wingnut
16	4	1/4-20 x 1/2 thumbscrew

The cart shall have sufficient rigidity and strength to pass the test specified in 4.4.1. All diameters and gages specified herein are minimum. Commercial tolerances shall be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

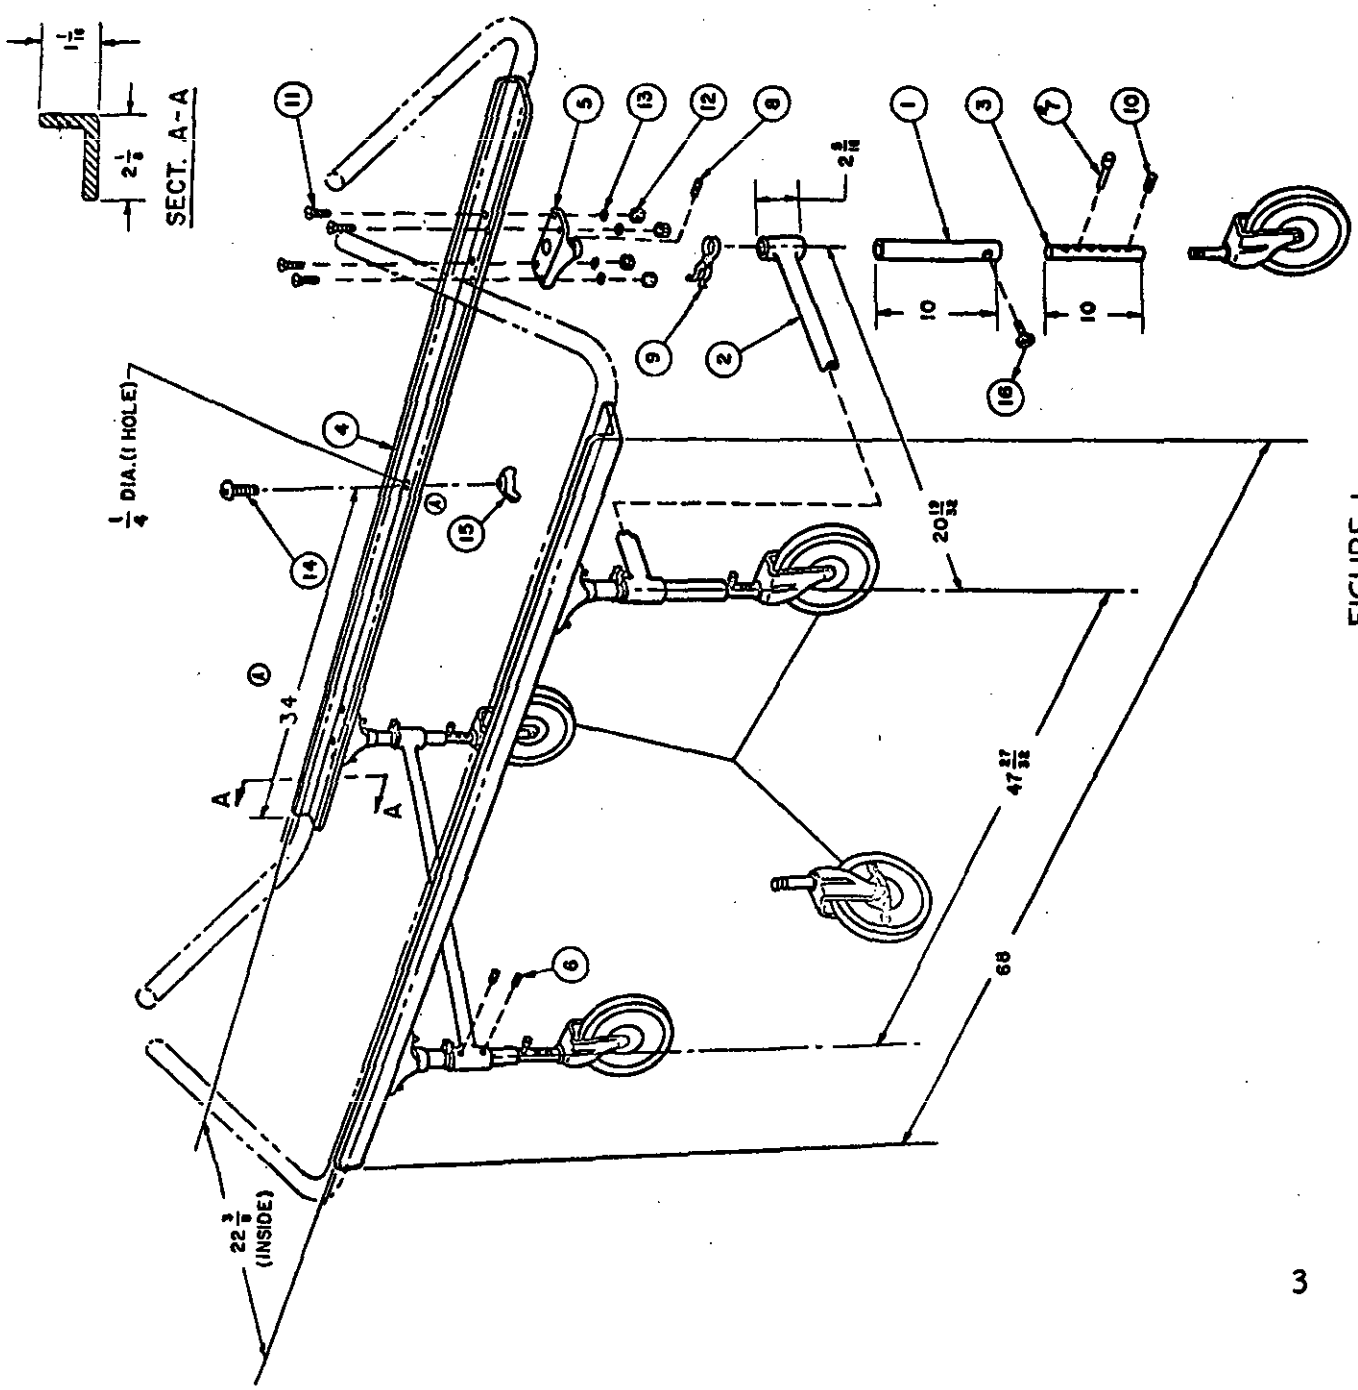


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

3.2.1 Uprights. Each upright shall be 1-inch-outside-diameter, 0.083-inch-thick (No. 14, Birmingham Wire (B. W.) gage) carbon steel tubing.

3.2.2 Cross braces. Each cross brace shall consist of two lengths of 1-1/4-inch-outside-diameter, 0.120-inch-thick (No. 11, B.W. gage) carbon steel tubing, joined by means of a length of 1-inch-outside-diameter, 0.065-inch-thick (No. 16, B.W. gage) carbon steel tubing. Joints shall be continuously welded along all contact surfaces.

3.2.3 Extension rod. Each extension rod shall be formed of 3/4-inch-diameter aluminum rod. One end of each rod shall be provided with a socket to receive the caster stem. The rod shall be drilled to provide holes so that each leg shall be capable of being extended an additional 7 inches in 1-inch intervals.

3.2.4 Casters. Casters shall be type II, class F, size 5, style 4, mountings conforming to FF-C-77. Diagonal casters, i.e., two of the four, shall be provided with wheel brakes. The stem shall be 7/16-inch in diameter, unthreaded.

3.2.5 Side rails. Each side rail shall be fabricated of 1/8-inch-thick carbon steel angle. Each rail shall have one hole to enable the frame to be placed either way on the cart, and fastened into position by means of machine screws and wingnuts.

3.2.6 Side rail supports. Each side rail support shall be of cast aluminum, and shall have a central hole for making a tight fit on the upright tubing. The support shall provide a level surface, 4-7/8 inches long by 2-1/4 inches wide, for supporting the side rails.

3.2.7 Hardware. Hardware for assembling the cart shall be as shown on the drawing. Socket head setscrews shall be cup pointed.

3.3 Finish

3.3.1 Carbon steel. The tubular uprights, the assembled (welded) cross braces, and the side rails shall be plated with chromium over nickel over copper.

3.3.2 Hardware, casters, etc. All screws, bolts, nuts, etc., shall be heavily nickel plated over copper, or shall be cadmium plated. Casters shall be nickel, zinc, or cadmium plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

3.4 Identification marking. Each cart shall have a metal nameplate permanently attached bearing the following information:

Federal stock number.

Name or registered trademark of the manufacturer.

Contract or purchase order number.

U.S.

Marking shall be distinct and legible. Marking secured by adhesives shall not be used. As an alternate the identification marking may be stamped on the side rail.

3.5 Instructions and service data. The contractor shall enclose, with each unit, two copies each of one or more booklets which contain complete instructions for assembly, operation, maintenance, and a list of component parts. Each part of the unit shall be identified in the service data and parts list by the manufacturer's part number. In addition, the contractor shall mail 15 copies of the service data to the contracting officer for distribution.

3.6 Workmanship. Workmanship shall be first class throughout. Carts shall be free from defects which detract from their appearance or may impair their serviceability.

3.6.1 Welding. The carts shall be continuously welded or brazed at all required joints. Corners shall be rounded and ground smooth to blend with adjacent areas. Welds shall be durable and sound in every detail. Prior to welding, all components shall be properly aligned in their proper positions to insure a straight, rigid, and level assembly.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual, auditory, etc., investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. When available, certificates of quality, supplied by the manufacturer of the component or material, listing the specified test method and test results obtained, may be furnished in lieu of actual performance of such testing by the contractor.

4.2 Sampling.

4.2.1 For examination and test. Sampling shall be conducted in accordance with MIL-STD-105.

	Inspection level	AQL (defects per hundred units)
For visual examination		
Major defects	II	1.0
Total (major and minor combined) defects	II	2.5
For dimensional examination	S-3	2.5
For load test	S-4	*

* Acceptance number shall be zero. Not less than three samples shall be taken regardless of lot size.

4.2.2 Raw materials. Four ounces of each lot of metal used in the construction of the cart shall be selected for chemical analysis.

4.3 Examination. The carts shall be examined to determine compliance with all requirements contained in this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the following classification of defects:

Categories and defects*

Major
101 Any component missing.
102 Any component fractured, split, cracked, punctured, cut, dented, sprung, malformed, creased, or otherwise impaired, affecting serviceability.
103 Any part misplaced, loose, or not in proper alignment, affecting serviceability.
104 Any sharp edge, bur, or sliver.
105 Any operation omitted or not properly performed.
106 Any functioning component inoperative or does not perform as intended.
107 Any screw stripped, missing, or loose.
108 Any weld missing or incomplete.
109 Any weld burned through, cracked, or undercut.

Minor
201 Finish not as specified; not free of scratches, rough grind marks, and other defects.
202 Unit not clean; not free of dirt, oil, and grease.
203 Any weld not free of flash, splatter, flux, burns, etc.
204 Any weld not ground and polished to blend with adjacent surfaces; not free of pit marks and seams.
205 Identification marking missing, incomplete, impermanent, or illegible.

*Examination shall not be restricted to the classified possible defects listed above.

4.3.2 Dimensional examination. The carts shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Load. The fully assembled cart shall be set up with the extension legs fully extended. The cart shall then be loaded with a uniformly distributed weight of 500 pounds. The cart shall be moved about and observed for any indication of failure. The test shall be repeated with one set of legs extended and the opposite set retracted.

4.4.2 Chemical composition. Tests for chemical analysis shall be conducted in accordance with method 111.1 or 112.1 of Fed. Test Method Std. No. 151.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One (1) cart, as specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Unit preparation. Each unit shall be disassembled as far as is practicable. Component parts shall be protected by wrapping in kraft paper and cushioning with excelsior pads, paper pads, flexible corrugated fiberboard, or other suitable materials. All wrapping and cushioning materials shall be secured by tying with twine or by sealing with kraft gummed paper tape. Component parts shall be packaged in one or more fiberboard cartons or wood boxes of appropriate size and design. Containers shall be adequately secured to prevent accidental opening, and shall contain sufficient cushioning material to prevent shifting and breakage.

5.1.3 Level C. Unit shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Each unit shall be overpacked in an exterior container designed for type 2 load and constructed in accordance with PPP-B-585, style 3, for class 3 use; PPP-B-601, table II, using type III, class 1 plywood; or PPP-B-621, table III.

5.2.1.2 Case liner. Each level A box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto.

5.2.1.3 Strapping. Strapping, when required, shall be in accordance with applicable box specification.

NOTE: Strapping will not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

5.2.2 Level B.

5.2.2.1 Exterior container. Each unit shall be overpacked in an exterior container conforming to PPP-B-601, table I, using class 1 plywood; or an exterior container designed for type 2 load and constructed in accordance with PPP-B-585, style 3, for class 2 use; or PPP-B-621, table I.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each container shall be marked to identify contents.

5.3.2 Exterior containers. Exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Number and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types, etc., which are normally procured to meet Military requirements.

Custodians:
Army. - MD
Navy. - MS
Air Force. - 03

Review activities:
Army. - MD
Navy. - MS
Air Force - 03

Preparing Activity:
Defense Supply Agency. - DM

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-C-36204(DM), dated 28 January 1965, CART, ORTHOPEDIC BED

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$ —

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1426

SND PPSO 12502

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS/OFFERORS

DO NOT CONDITION OR BASE YOUR BID/OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID/OFFER NON-RESPONSIVE IN WHICH CASE IT CANNOT BE CONSIDERED FOR AWARD.

FOLD UNDER

DEFENSE SUPPLY AGENCY
DEFENSE MEDICAL SUPPLY CENTER
3RD AVENUE AND 29TH STREET
BROOKLYN, N.Y., 11232

POSTAGE FEES PAID
DEFENSE SUPPLY AGENCY

OFFICIAL BUSINESS

DEFENSE SUPPLY AGENCY

DEFENSE MEDICAL SUPPLY CENTER

ATIN: DIRECTORATE OF TECHNICAL OPERATIONS (CODE TM5)

3RD AVENUE AND 29TH STREET

BROOKLYN, N.Y., 11232

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:12Z
Check the source to verify that this is the current version before use.