MIL-R-36171C
3 March 1977
Superseding
MIL-R-36171B
23 September 1970

MILITARY SPECIFICATION

RESTRAINT SET, WRIST AND ANKLE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers components of one type of wrist and ankle restraint set.

1.2 Classification. Restraint set components shall be furnished as follows, or in combinations.

Component A	- One pair of Anklets
Component B	- One pair of Wristlets
Component C	- One each of Ankle Restraining Straps
Component D	- One each of Wrist Restraining Straps
Component E	- One each of Carrying Case
Component F	- Two each of Key

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 South 20th Street, Philadelphia, Pa. 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
V-T-295	- Thread, Nylon
KK-L-156	- Leather, Cattlehide, Harness, Vegetable-Tanned.
MIL-L-254	- Leather, Sheepskin, Chrome Tanned.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, [illegible]-yarns, Army and Numbered.
CCC-D-650	- Dyeing and Aftertreating Processes for Cotton Cloths.
PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-585	- Boxes, Wood, Wirebound.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-676	- Boxes, Set-Up, Paperboard.

MILITARY

MIL-T-3530	- Thread and Twine, Mildew Resistant or Water Repellent Treated.
MIL-L-10547	- Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.
MIL-F-10884	- Fasteners, Snap.
MIL-T-43566	- Tape, Textile Cotton, General Purpose, Natural or in Colors.

STANDARDS

FEDERAL

FED-TEST-METHOD STD-NO. 151	- Metal, Test Methods.
FED-TEST-METHOD STD-NO. 191	- Textile Test Methods.
FED-TEST-METHOD STD-NO. 311	- Leather, Methods of Sampling and Testing.
FED-STD-NO. 751	- Stitches, Seams and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING & MATERIALS (ASTM)

D 1175 - Test for Abrasion Resistance of Textile Fabrics.
D 1682 - Test for Breaking Load and Elongation of Textile Fabrics.
D 1777 - Test for Measuring Thickness of Textile Materials.

(Application for copies should be addressed to the American Society for Testing & Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI Steel Products Manual - "Stainless and Heat Resistant Steels."

(Applications for copies should be addressed to the American Iron and Steel Institute, 1000 16th St., N.W., washington, DC 20036.)

3. REQUIREMENTS

3.1 First article. When specified in the procurement document, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.1.2.1 and 6.2).

3.2 Materials.

3.2.1 Cotton duck. The duck, before finishing, shall conform to type I, No. 10, hard texture of CCC-C-419.

3.2.1.1 Color and treatment. The cotton duck shall be vat dyed olive drab No. 7, water-repellent and mildew resistant treated, in accordance with CCC-D-950, Type I, class B, except that the mildew resistant inhibitors shall be limited to a, e, f, and g.

3.2.2 Tape. Tape shall conform to type I, class 4 of MIL-T-43566 and shall be vat dyed olive drab No. 7.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:10Z
Check the source to verify that this is the currentversion before use.

3.2.3 Thread.

3.2.3.1 Thread for restraint set. The thread used in the manufacturing of the restraint set shall be natural color or dyed brown in accordance with V-T-276, Type IIIA or IIIB, ticket number 8 or 10, 3 ply. As an alternate, nylon thread of a comparable size and ply, conforming to V-T-295, shall be used.

3.2.3.2 Thread for case. The thread for all stitching of the case shall conform to type IIIA or IIIB, 3-ply, ticket No. 10/3 of V-T-276. The thread shall be vat dyed O.D. No. 7, and shall be mildew resistant treated in accordance with type I, class 1 of MIL-T-3530.

3.2.4 Leather.

3.2.4.1 Leather for straps, anklets and wristlets. The leather for the straps, anklets and wristlets shall conform to class 1, type I, II, III or IV lightweight of KK-L-156 except that the leather for the buckle reinforcement and the belt loop shall have a minimum weight of extra light (8 to 9-3/4 ounces). Color of the leather shall be russet or black.

3.2.4.2 Leather for lining. Leather for linings shall be brown suede coltskin or napped sheepskin conforming to class 1, subclass a, type A or type B of KK-L-254.

3.2.5 Nylon webbing. Nylon webbing shall be 0.082 to 0.090 inches thick and 1-1/4 ± 1/8 inches wide with a minimum breaking strength of 3700 pounds when tested as specified in 4.4.4.

3.2.6 Synthetic leather. The synthetic leather shall be a man-made polyester fiber of non-woven reinforced substrate with a poromeric leather-like polished finish (see 6.6). The synthetic leather shall be treated with a non-toxic fungicide and mildew preventative. The finished synthetic leather shall be non-irritating and non-toxic when tested as specified in 4.4.7. The synthetic leather shall also have the characteristics shown in table I when tested as specified in 4.4.3. Color of the synthetic leather shall be russet or black.

3.2.7 Synthetic suede. The synthetic suede shall be a synthetic fiber base with a latex impregnate or binder and with a wet cast micro-cellular polyurethane napped or sueded finish bonded to the base by an adhesive film bonding agent (see 6.6). The synthetic suede shall be treated with a non-toxic fungicide and mildew preventive. The finished synthetic suede shall be non-irritating and non-toxic when tested as specified in 4.4.7. The synthetic suede shall have the characteristics listed in table I when tested as specified in 4.4.3. Color of the synthetic suede shall be brown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

TABLE I. Synthetic material requirements.

Characteristic	Requirements	
	Synthetic leather	Synthetic suede
Thickness (inches):	0.065 ± 0.010	0.070 ± 0.004
Breaking strength (minimum) (lbs/ in. of width)		
Machine direction	162	30
Cross machine direction	196	25
Elongation at break (% max.):		
Machine direction	130	35
Cross machine direction	145	70
Tongue tear (lbs min):		
Machine direction	68	3.5
Cross machine direction	48	3.5
Stitch tear (lbs min.):		
Machine direction	66	-
Cross machine direction	66	-
Tabor abrasion	Moderate finish removal (no sub-strate removal) after 100 cycles.	-

3.2.8 Hardware.

3.2.8.1 Rivets and burr washers. Rivets shall be belt or truss type. Rivets and burr washers shall be solid copper, or corrosion-resisting steel conforming with the AISI type 300 series as indicated in the AISI Steel Products Manual, or carbon steel finished as specified in 3.6.2.2.1.

3.2.8.2 Wire loops and plates. Wire loops and plates shall be formed from either corrosion-resisting steel conforming with the AISI type 300 series as indicated in the AISI Steel Products Manual, or carbon steel finished as specified in 3.6.2.2.1.

3.2.8.3 Keys, buckle frames, locking posts, screws, end clips and internal buckle parts. Keys, buckle frames, locking posts, screws, end clips and internal buckle parts shall be formed from brass and finished as specified in 3.6.2.2.2, corrosion-resisting steel conforming with the AISI type 300 series as indicated in the AISI Steel Products Manual, or carbon steel finished as specified in 3.6.2.2.1. As an alternate, internal buckle parts shall be bronze. All screws shall be secured with an adhesive thread locking compound to prevent the screws from loosening or being removed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

3.2.8.4 Snap fastener. The snap fastener for the carrying case shall conform to style 2, finish 2 of MIL-F-10884.

3.3 Design. The restraint set shall be designed to restrain moderately disturbed and psychiatric patients in a humane manner. The restraint set shall consist of two wristlets and strap with lock buckle and key, and two anklets and straps with lock buckle and key. A suitable carrying case shall be supplied. Construction shall be as specified in 3.4.

3.4 Construction.

3.4.1 Anklet and wristlet. (Components A and B) Each anklet and each wristlet shall be constructed of either leather (3.2.4.1) or synthetic leather (3.2.6) and shall conform to figure 1. A steel wire loop, having the dimensions shown in figure 1, shall be formed to accept the restraint strap (3.4.2). The loop shall be centrally located, as shown. The loop shall be furnished with a top and bottom plate, as shown in figure 1, with standard mill finish, securely riveted to the wristlet or anklet. The bottom plate (see figure 1) shall be covered by an additional piece of leather or synthetic leather padding to keep the plate from pushing through the lining. Three slots, each designed to fit snugly over the loop, shall be formed in the end of each wristlet and anklet opposite the metal loop. The lining shall be constructed of either leather (3.2.4.2) or synthetic suede (3.2.7) and shall be stretched smoothly over the inside of each wristlet and anklet. The lining including the edges of the slots, shall be sewn securely in place with a minimum of 6 ± 1 stitches per inch. Anklets and wristlets shall be furnished in pairs.

3.4.2 Anklet and wristlet restraining straps. (Components C and D) The restraining straps shall be constructed of either leather (3.2.4.1) or nylon webbing (3.2.5) and shall conform to figure 2. When nylon webbing is used, the buckle end of the strap shall be hardened to prevent raveling and the other end shall be provided with an end clip (3.2.8.3). The webbing shall be inserted the full depth of the clip and shall lie flat at the point where it enters the clip. A lock buckle of the type illustrated shall be securely attached to the end of the restraining strap by two rivets with washers (see 3.2.8.1). There shall be a reinforcing piece (leather or synthetic material) flush with the end of the buckle and secured to the buckle by means of a countersunk flathead screw (3.2.8.3) and the two rivets (3.2.8.1) which attach the strap to the buckle. The other end of the reinforcing piece shall be attached to the restraining strap by 4 rivets with washers or by stitching. The opposite end of the strap shall have a series of eyelets in the center of the strap.

3.4.3 Carrying case. (Component E) Construction of the cotton duck (3.2.1) carrying case shall be in accordance with figure 3. All seams and stitching shall be straight, formed by machine, with 8 + 1 stitches per inch. Ends of stitching rows shall be back-stitched.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:10Z
Check the source to verify that this is the current version before use.

3.4.3.1 Binding. The binding for the carrying case shall be 3/4 inch wide tape (3.2.2).

3.4.3.2 Handle. The handle for the carrying case shall be 1 inch wide tape (3.2.2).

3.4.4 Keys. (Component F) The keys (3.2.8.3) shall be in strict accordance with figure 4. Keys shall be supplied in pairs. The key shall fit freely into the lock without any binding, and unlock the restraint set when tested as specified in 4.4.5.

3.5 Stitches, seams and stitchings. All seams and stitchings shall conform to FED-STD-NO. 751, shall be straight, and shall consist of type 301 stitches. Thread tension shall be maintained properly so that the stitch lock will be imbedded in the center of the material sewed.

3.6 Strength requirements, restraining straps. The restraining straps (343.2) for both the anklets and wristlets shall be capable of withstanding a straight tensile pull of at least 250 pounds without damage to the strap or lock buckle. A reverse force of at least 150 pounds shall be capable of being applied to the free end of the lock strap without damage to the strap or the lock buckle or causing the buckle to open. Tests shall be conducted as specified in 4.4.6.

3.7 Finish.


3.7.1 Leather. The leather (3.2.4.1) shall be polished with a cloth. A neutral polishing cream shall be applied and allowed to dry. The surface shall again be polished. The finished leather shall meet the requirements of 3.2.4.1 and shall be non-irritating and non-toxic when tested as specified in 4.4.7.

3.7.2 Metals. All exposed corrosion-resisting steel parts shall be given a No. 4 commercial finish.

3.7.2.1 Degreasing. All metal surfaces shall be thoroughly cleaned and degreased prior to plating.

3.7.2.2 Finish. All metal parts shall be finished to prevent corrosion.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:10Z
Check the source to verify that this is the current version before use.

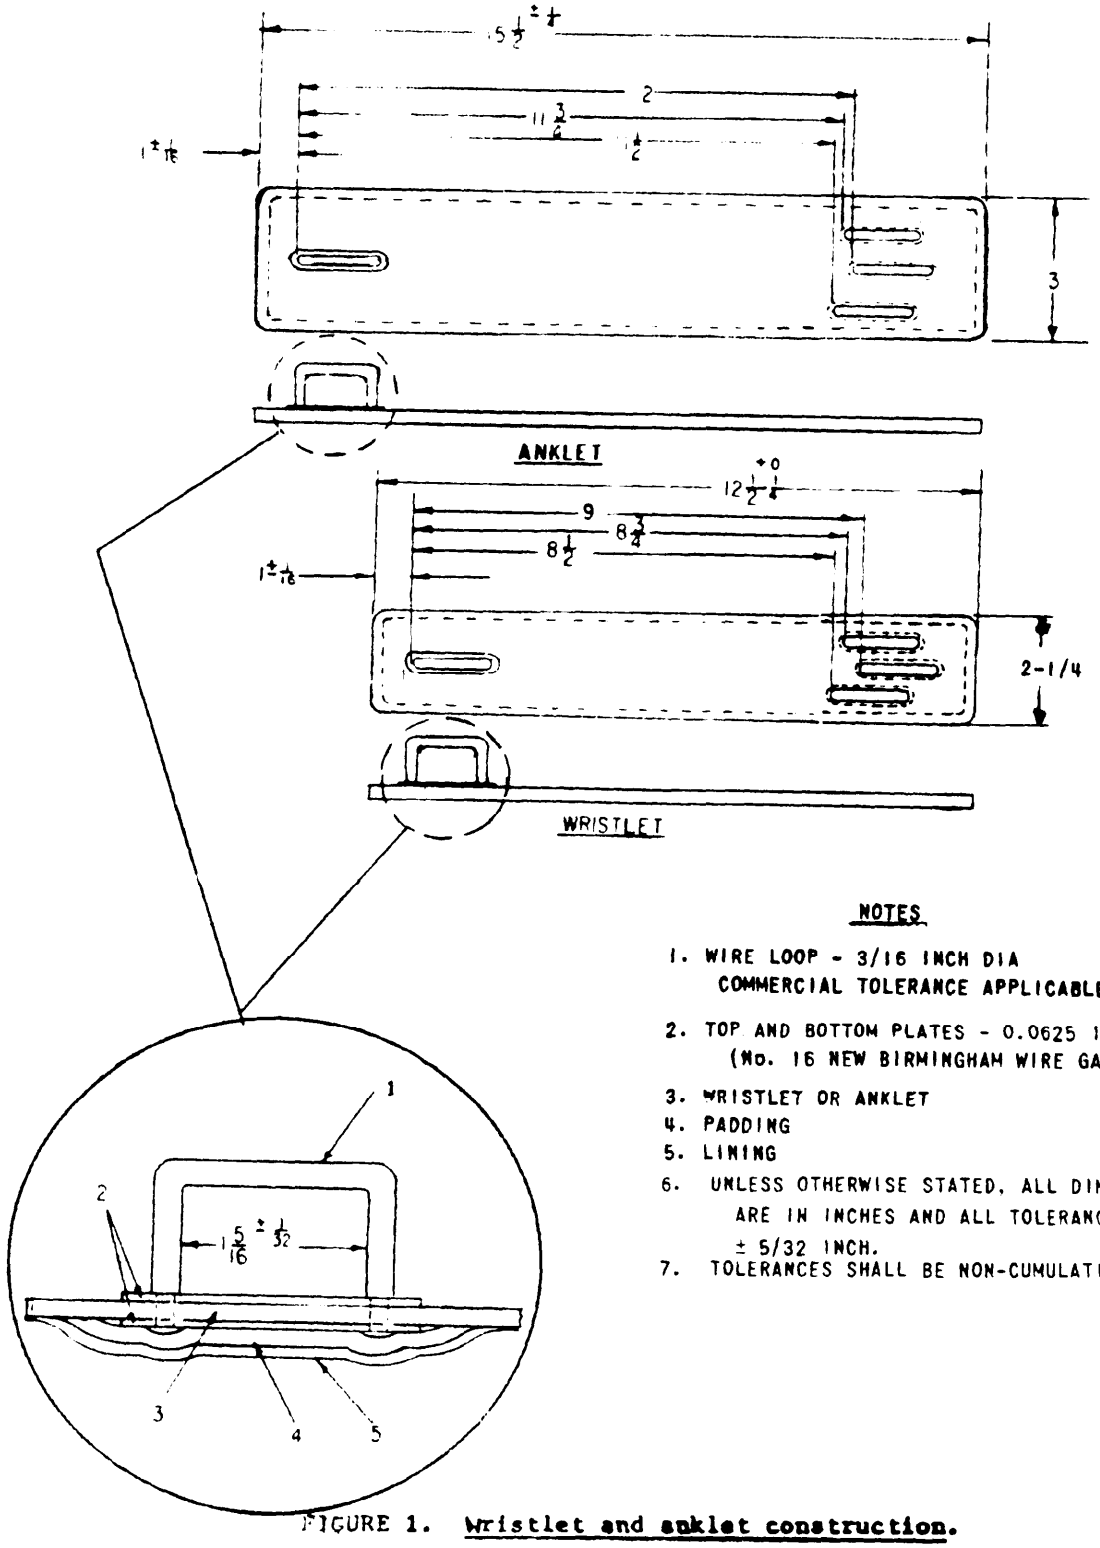


NOTES

1. WIRE LOOP - 3/16 INCH DIA
   COMMERCIAL TOLERANCE APPLICABLE
2. TOP AND BOTTOM PLATES - 0.0625 INCH
   (No. 16 NEW BIRMINGHAM WIRE GAGE)
3. WRISTLET OR ANKLET
4. PADDING
5. LINING
6. UNLESS OTHERWISE STATED, ALL DIMENSIONS ARE IN INCHES AND ALL TOLERANCES ARE ± 5/32 INCH.
7. TOLERANCES SHALL BE NON-CUMULATIVE.

FIGURE 1. **Wristlet and anklet construction.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

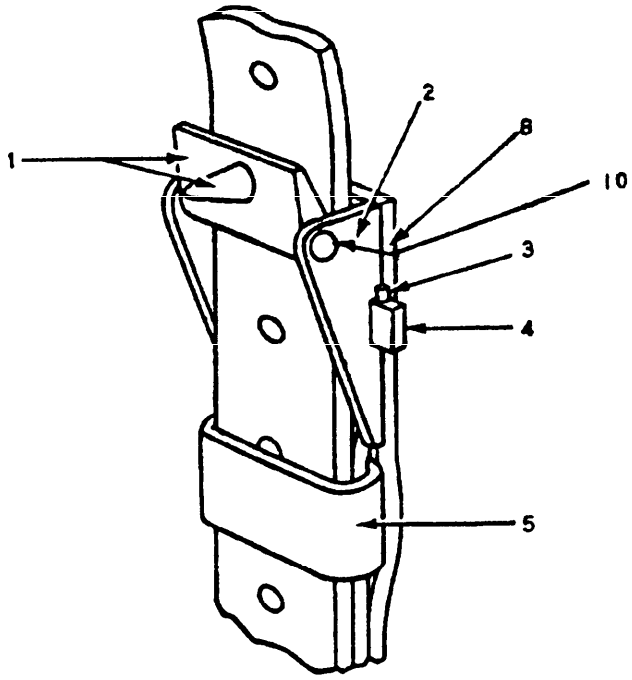

BUCKLE, UNLOCKED

1. LOCKING MEMBER AND PIN
2. BUCKLE FRAME - 1-3/4 LONG AND 1-1/4 WIDE REF.
3. SPRING PLUNGER
4. PLUG
5. BELT LOOP
6. SCREW - 1/8 DIA, 1/16 FROM LEADING EDGE OF METAL CLASP (REF)
7. RIVETS - 3/8 DIA SHAFT (REF)
8. REINFORCING PIECE
9. RESTRAINING STRAP - ANKLET 36 MINIMUM OVERALL LENGTH WRISTLET - 52 MINIMUM OVERALL LENGTH
10. LOCKING POST

NOTE

UNLESS OTHERWISE STATED, ALL DIMENSIONS ARE IN INCHES


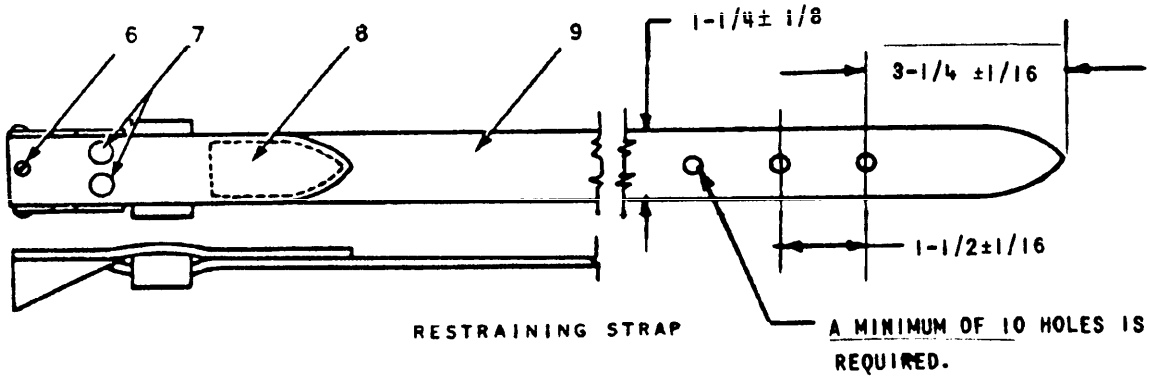


FIGURE 2. Lock buckle and restraining strap construction.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

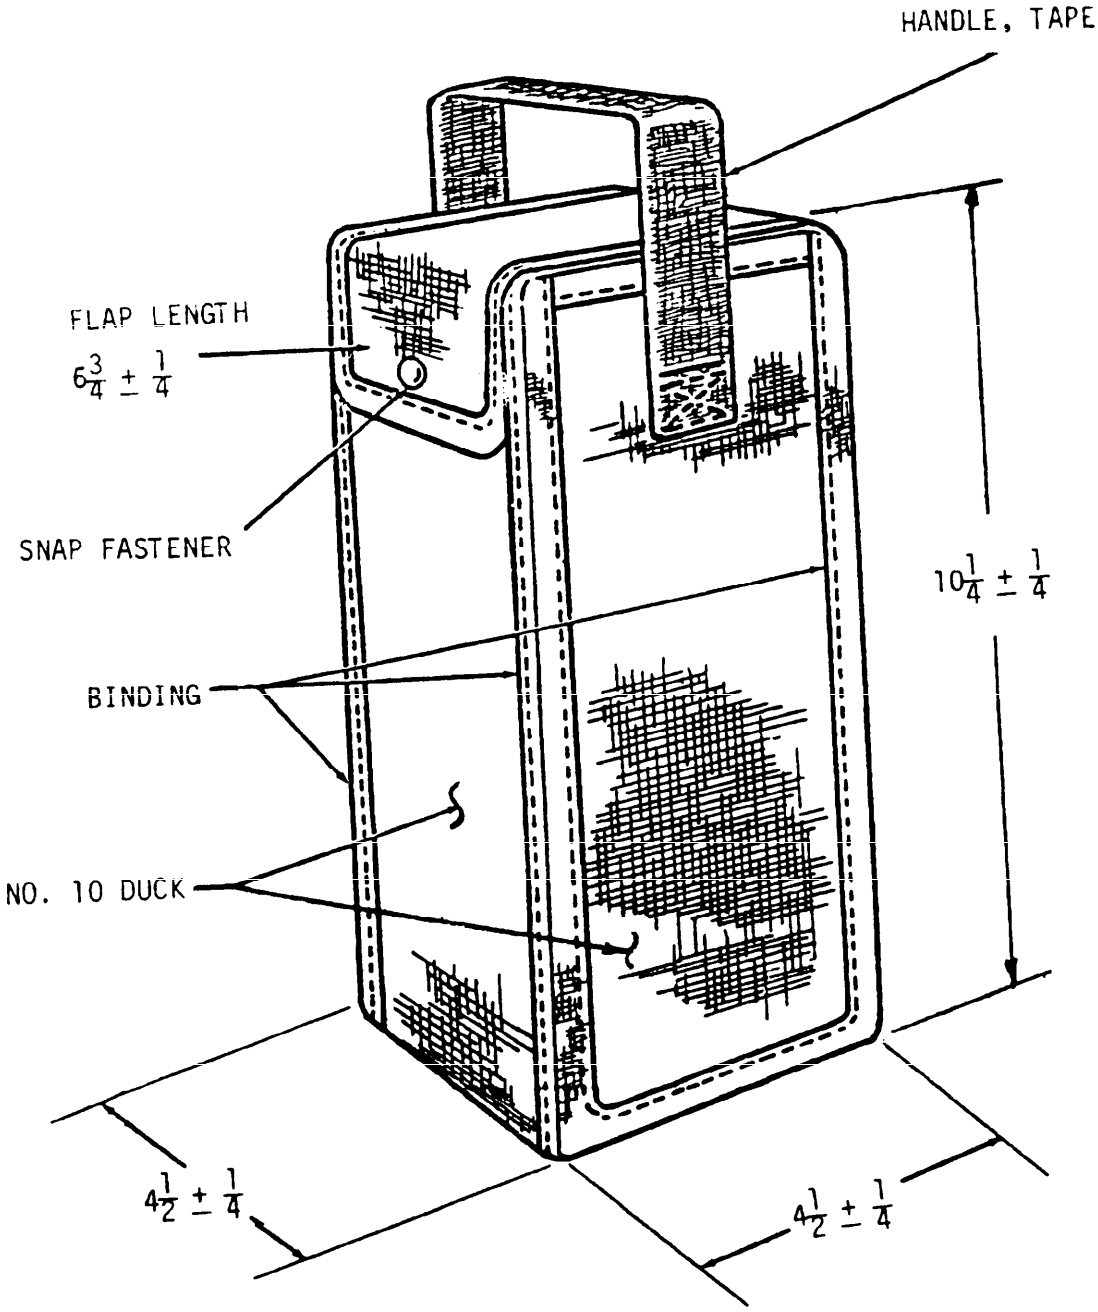

ALL DIMENSIONS IN INCHES.

FIGURE 3. Case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

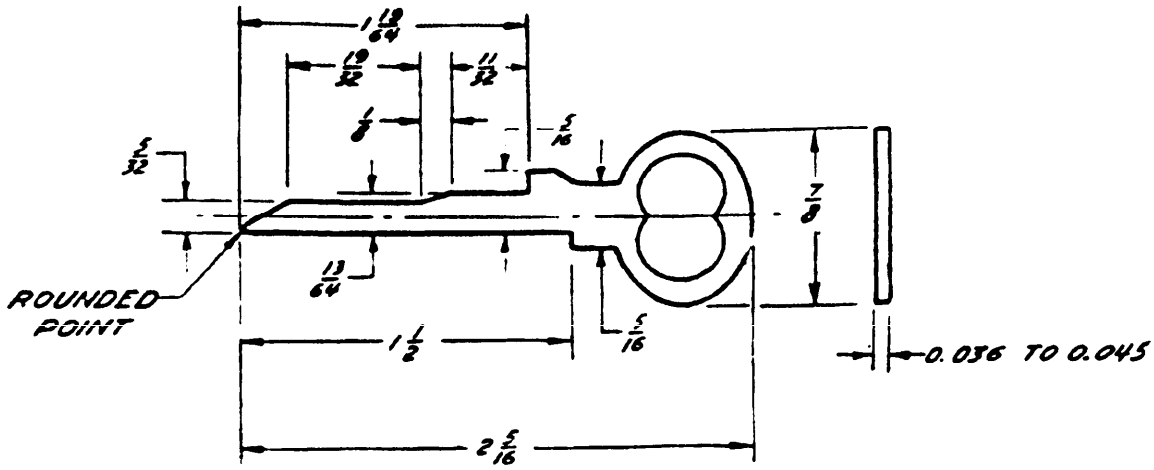

NOTE: All dimensions are in inches. Dimensions shown are nominal. Tolerances shall be as required to make key function with restraint locks per requirements of specification.

FIGURE 4. Key for lock buckles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

3.7.2.2.1 Carbon steel. Steel parts shall be plated with a minimum of 0.0003 inch thick nickel over a minimum of 0.00035 inch thick copper.

3.7.2.2.2 Brass. Brass parts shall be plated with a minimum of 0.0003 inch thick nickel.

3.8 Identification marking. Each anklet, wristlet, and restraining strap, shall have permanently marked in distinct, legible letters, the name or registered trademark of the manufacturer. In addition, each carrying case shall be marked with the name or registered trademark of the manufacturer and the contract or purchase order number.

3.9 Instructions. Two instruction sheets explaining how items are used, shall be furnished with each apparatus or component if procured separately. All parts and components shall be identified on the sheet. The instruction sheet shall also carry a note to periodically check the countersunk flathead screw (securing the reinforcing piece of the restraining straps to the buckle) for tightness. Instructions for care and cleaning of the leather and synthetics shall be included.

3.10 Workmanship. Workmanship shall be first class throughout. Restraint sets shall be free from defects which detract from their appearance or may impair their servicability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the restraint set or component when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and tests of 4.4.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and tests of 4.4.

4.1.3 Certificates of quality. Certificates of quality supplied by the manufacturer of the materials used to fabricate the restraint set or any component, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificates shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table II.

TABLE II. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	S-4	1.0
Minor defects	S-4	4.0
For dimensional examination	S-1	2.5

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:10Z
Check the source to verify that this is the currentversion before use.

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and table III. Not less than 3 samples shall be taken regardless of lot size. Acceptance number shall be zero (0) for all sample sizes.

TABLE III. Sampling for tests.

Material or Component	Requirement	Test procedure	Inspection level
Restraint Set:			
Synthetic leather	3.2.6	4.4.3	S-2
	3.2.6	4.4.7	S-2
Synthetic suede	3.2.7	4.4.3	S-2
	3.2.7	4.4.7	S-2
Nylon webbing	3.2.5	4.4.4	S-2
Key and lock	3.4.4	4.4.5	S-2
Strap - ankle and wrist	3.6	4.4.6	S-2
Tape, mildew resistance	3.2.2	4.4.2.2.1	S-2

4.2.3 For chemical composition. Four ounces of each lot of each metal used in the restraint set shall be selected for chemical analysis as specified in 4.4.1.

4.3 Examination. The restraint apparatus shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with, but not restricted to, the classification of defects in table IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects.

Category	Defects
Major	
101	Any component, or part, not supplied.
102	Snap fastener on carrying case does not function.
103	Metal parts not free of burrs, or sharp edges.
104	Leather, synthetic leather, synthetic suede, or nylon webbing not free of cuts, tears.
105	Materials not as specified.
106	Fabric for carrying case not free of cuts, tears.
107	Restraint strap does not fit through loops on wristlets, anklets.
Minor	
201	Specified marking not present.
202	Specified marking not legible.
203	Number of stitches per inch not as specified.
204	Thread type and color not as specified.
205	Components, restraint set not free of dirt and extraneous matter.
206	Color of components not as specified.

4.3.3 Dimensional examination. Each component of the restraint set shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.3.4 Packaging inspection. The inspection of the unit, intermediate package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

4.4.1 Chemical composition. The samples selected in accordance with 4.2.3 shall be analyzed in conformance with methods 111 or 112 of FED-TEST-METHOD-STD-NO. 151. In case of dispute, method 111 shall be used for referee analysis.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

4.4.2 Carrying case.

4.4.2.1 Cloth. The unfinished cloth shall be tested in accordance with the procedures in CCC-C-419. The finished cloth shall be tested in accordance with the test procedures of CCC-D-950, except that performance of the tests for mildew inhibitor content and mildew resistance shall be conducted under the following conditions:

(a) If the material conforms to the requirements for mildew inhibitor content, the mildew resistance tests need not be performed, and the material shall be considered as complying with mildew resistance requirements.

(b) If the mildew inhibitor content exceeds the maximum requirement, the material shall be rejected.

(c) If the mildew inhibitor content is found to be below the minimum requirement, the material shall be acceptable with respect to mildew resistance provided it passes the mildew-resistance test in method 5750, quantative procedure, of FED-TEST-METHOD-STD-NO. 191. The leaching process shall be omitted.

4.4.2.2 Tape. The tape shall be tested in accordance with the test procedures of MIL-T-43566, except that the performance of the tests for mildew inhibitor content and mildew resistance shall be conducted under the following conditions:

(a) If the material conforms to the requirements for mildew inhibitor content, the mildew resistance tests shall not be performed, and the material shall be considered as complying with mildew resistance requirements.

(b) If the mildew inhibitor content exceeds the maximum requirement, the material shall be rejected.

(c) If the mildew inhibitor content is found to be below the minimum requirement, the material shall be acceptable with respect to mildew resistance provided it passes the mildew resistance test of method 5750, quantative procedure, of FED-TEST-METHOD-STD-NO. 191. The leaching process shall be omitted.

4.4.2.3 Thread. The treated thread shall be tested using the test methods specified in MIL-T-3530, except that wherever specification CCC-T-191 appears, FED-TEST-METHOD-STD-NO. 191 shall be substituted.

4.4.3 Synthetic leather and synthetic suede.

4.4.3.1 Thickness. Thickness shall be measured in accordance with ASTM D1777.

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:10Z
Check the source to verify that this is the current version before use.

4.4.3.2 Tensile strength and elongation at break. The tensile strength and the elongation at break shall be measured in accordance with ASTM D1682. The tensile testing machine shall be the constant rate of extension type set to elongate the sample at a rate of 200% per minute. The test method shall be the Method for Strip Test.

4.4.3.3 Taber abrasion. The synthetic leather shall be tested for Taber abrasion in accordance with ASTM D1175. The load shall be 1000 grams per wheel. Wheels shall be the H-18 (vitrified, non-resilient wheel of "medium coarse" abrasive action) abrasive wheels. The test method shall be the rotary platform, double-head Method.

4.4.3.4 Stitch tear. The synthetic leather and synthetic suede shall be tested for stitch tear in accordance with method 2151 of FED-TEST-METHOD-STD-NO. 311.

4.4.3.5 Tongue tear. The synthetic leather and synthetic suede shall be tested for tongue tear in accordance with method 2111 of FED-TEST-METHOD-STD-NO. 311.

4.4.4 Nylon webbing. The nylon webbing shall be tested for tensile strength in accordance with Method 4108 of FED-TEST-METHOD-STD-NO. 191.

4.4.5 Key and lock. Insert key into lock assembly. The key shall enter lock without any binding and release spring plunger, item No. 3 of figure 2. The spring plunger shall be released immediately without having to wiggle the key. Lift locking member and pin, item 1 of figure 2. Remove key. Relock mechanism by pushing down spring plunger and resetting locking member and pin. Repeat the above operation for four more cycles.

4.4.6 Restraining strap (wrist and ankle), strength requirements. The tests shall be conducted on a tensile testing machine. The buckle end of the strap shall be gripped in the stationary jaw of the machine. The distance between the jaws on a straight pull shall be 7 inches, while on a reverse pull the distance between the jaws shall be 4 inches. The buckle shall be located between the jaws of the machine during the test.

4.4.6.1 Straight pull. The restraint strap shall be locked. The strap (not the free end) shall be gripped in the moving jaw of the machine, and a straight pull of 250 pounds applied.

4.4.6.2 Reverse pull. The restraint strap shall be locked, after making certain that sufficient free end of the strap is exposed to be properly gripped in the moving jaw of the tensile machine, and a straight pull of 150 pounds applied.

4.4.7 Toxicity. The toxicity and irritability of the material shall be determined by any standard method. The test method used shall be approved by the contracting officer. A certificate of quality may be submitted for the non-toxic and non-irritating properties (see 4.1.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

Certification in lieu of testing is acceptable provided the contractor certifies in writing that the raw materials and processing are identical to those used on materials previously tested and found acceptable.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit of issue. The component(s) parts, as specified in table V, constitute one unit of issue.

5.1.1.1.1 Unit packaging.

5.1.1.1.1.1 Components A through F. Each unit shall be placed within the carrying case in such a manner as to prevent movement. The carrying case shall then be packaged in a fiberboard box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Box shall be closed as specified in the appendix of PPP-B-636.

5.1.1.1.1.2 Components C and F, or Components D and F. Each unit shall be packaged in a box of appropriate size constructed in accordance with PPP-B-566 or PPP-B-676. Closure of box shall be as specified in the appendix of the applicable box specification.

5.1.1.1.1.3 Component F. Each unit shall be packaged in a suitable envelope. Closure shall be adequate to prevent accidental opening.

5.1.1.1.2 Intermediate packaging. The number of units as specified in table V shall be packaged in a box of appropriate size constructed in accordance with PPP-B-566, PPP-B-676 or PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of the applicable box specification.

TABLE V. Packaging Quantities.

Component Part(s)	Unit of Issue	Intermediate Package	Exterior Container
A through F	Set	Not required	18 units
C and F	Each	12 units	144 units
D and F	Each	6 units	72 units
F	Each	144 units	3476 units

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:10Z
Check the source to verify that this is the currentversion before use.

5.1.2 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. The number of units as specified in table V shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification.

5.2.1.1. Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof as specified in the appendix of PPP-B-636.

5.2.2 Level B. The number of units as specified in table V shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, type CF, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.3 Level C. Units shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking. Each unit, intermediate package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. The restraint set is intended for use in restraining patients in military hospitals and in the field.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3).
d. Component or components and National Stock Number required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 This specification covers the following items appearing in the Federal Supply Catalog:

National Stock Number	Item Identification	Component
6530-00-788-4010	Restraint Set, Wrist and Ankle	A,B,C,D,E,F
6530-00-788-4025	Key, Restraint Apparatus Lock	F
6530-00-788-4040	Restraint, Ankle	C,F
6530-00-788-4055	Restraint, Wrist	D,F

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

6.6 An acceptable synthetic leather (3.2.6) is Tanera and an acceptable synthetic suede (3.2.7) is Corfam-804. Both of which are manufactured by Scott/Chatham Company.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activity:
DCD-MB

Preparing activity:
DLA-DM

Project No. 6530-1406

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

Form Approved
OMB No. 22-R255

COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

IS THE DOCUMENT RESTRICTIVE?

6. REMARKS

DD FORM 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:10Z
Check the source to verify that this is the current version before use.