MIL-T-36184A
8 July 1974
SUPERSEDING
MIL-T-36184 (DM)
11 March 1964

MILITARY SPECIFICATION

TUNING FORK SET

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a tuning fork set suitable for use as diagnostic aid during medical and neuropsychiatric examinations.

* 2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Box, Wood, Wirebound.
PPP-B-601	Box, Wood, Cleated-plywood.
PPP-B-621	Box, Wood, Nailed and Lock-corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Box, Set-up.

Military

MIL-P-116	Preservation, Methods of
MIL-L-10547	Liners, Case and Sheet, Overwrap; Watervaporproof or Waterproof, Flexible.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:11Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 Material. Material shall be as follows:

Body and fork proper - 2024 T3 or T4
Weight on Arms - 2017 T4 or To or 2011 T3 Aluminum.

* 3.2 Style, design and dimensions. Tuning fork set shall consist of one each of the following: tuning fork C128, tuning fork C256, tuning fork C512, tuning fork C1024 and tuning fork C2048. Tuning fork set shall be in accordance with Figure 1, except dimensions shown on drawing shall be considered "reference" dimensions for outline purposes only.

3.2.1 Handles. Handles shall be an integral part of the forks and of same diameter. They shall be slightly rounded and polished to a smooth surface or finished to a satin smooth surface.

3.2.2 Prongs. The prongs of the C128 and C256 tuning forks shall be fitted with cylindrical weights fixed with screws, and shall be non-adjustable.


* 3.3 Vibrations. Each fork shall show a maximum intensity of response and a maximum period of sustained audible vibration for a given energy applied to excite the fork, and shall give the same frequency for both air and bone conduction tests as indicated in the table below. When tested as specified in 4.4.1, the minimum period of sustained vibration shall be:

Tuning Fork	Air Conduction	Bone Conduction
C - 128	45 seconds	22 seconds
C - 256	17 seconds	17 seconds
C - 512	35 seconds	17 seconds
C - 1024	30 seconds	_____
C - 2048	53 seconds	_____

3.4 Frequency, tone and tolerance. The frequency, tone and tolerance shall be as follows when tested as specified in 4.4.2:

Tuning Fork	Tone	Frequency (cycles per second)	Tolerance (cycles per second)
C - 128	C	128	6
C - 256	C	256	12
C - 512	C	512	15
C - 1024	C	1024	20
C - 2048	C	2048	40

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:11Z
Check the source to verify that this is the current version before use.

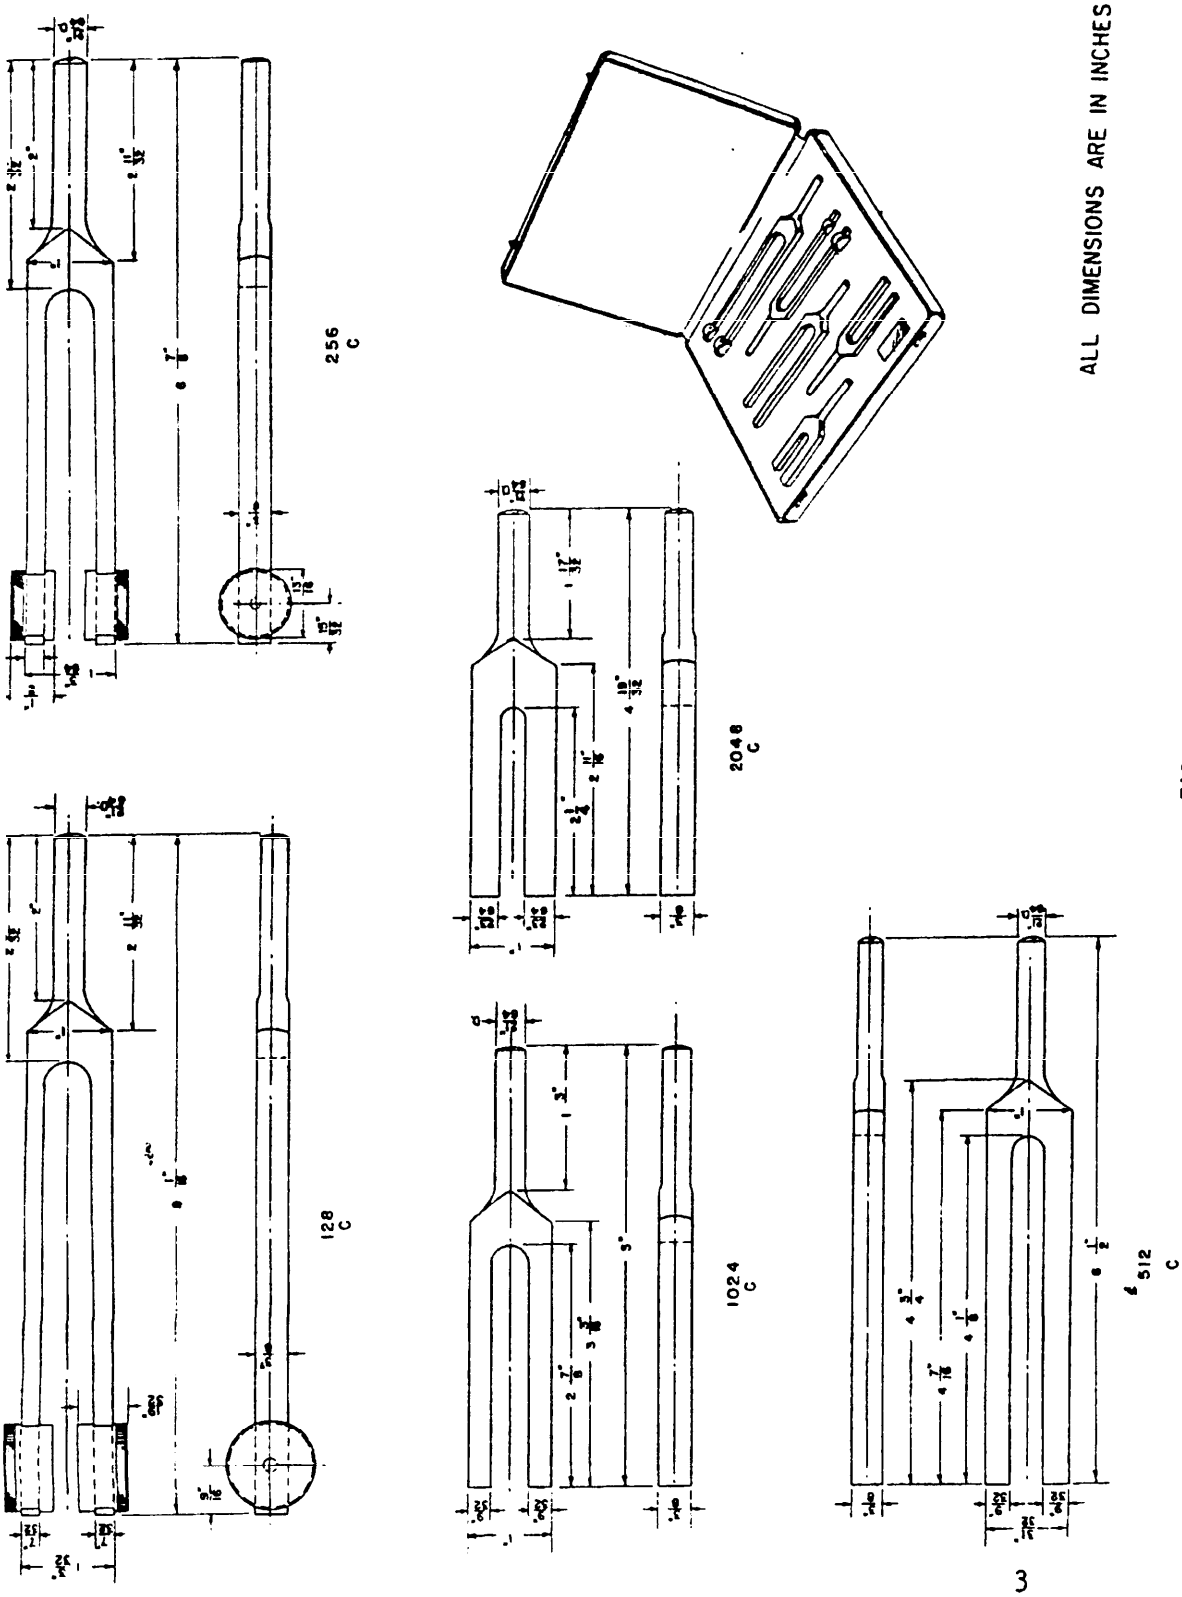

ALL DIMENSIONS ARE IN INCHES

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:11Z
Check the source to verify that this is the currentversion before use.

* 3.5 Case. Shall be made of good grade of wood or steel which shall be covered with a good grade synthetic leather. Interior shall be arranged to hold each fork of the set in a definite position. Case shall be equipped with clasp to insure closure.

3.6 Stamping. Each tuning fork shall be legibly and permanently stamped with the letter "C" and the specified number of cycles per second, together with the name or trademark of the manufacturer.

* 3.7 Workmanship. Workmanship shall be first class throughout. The tuning fork sets shall be free from defects which detract from their appearance or may impair their serviceability. The tuning forks shall be symmetrical in shape and shall have smoothly finished surfaces.

4. QUALITY ASSURANCE PROVISIONS.

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplier to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.2 Sampling. Sampling shall be conducted in accordance with Military Standard MIL-STD-105.

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as indicated in Table I. The unit of product for examination purposes shall be one tuning fork set.

Table I. Sampling for Examination

Defect category	Inspection level	AQL (percent defective)
Major	S-4	1.0
Minor	S-4	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:11Z
Check the source to verify that this is the current version before use.

4.2.2 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as indicated in Table II. Where feasible, the same sample unit shall be used for the determination of two or more tests characteristics.

Table II. Sampling for Tests

Component (unit of product)	Characteristic	Requirement	Test procedure	Inspection level	AQL (percent defective)
1-set	Dimensions	3.2	---	S-2	4.0
	Vibrations	3.3	4.4.1	S-2	2.5
	Frequency	3.4	4.4.2	S-2	2.5

4.3 Examination. The forks shall be examined to determine compliance with all requirements contained in this specification. Examination shall be conducted in accordance with MIL-STD-105 and the classification of defects specified in Table III. Examination shall include, but shall not be limited to, the defects listed in Table III.

Table III. Classification of Defects

Categories	Defects
Critical	None defined.
Major	
101	Tuning fork not symmetrical in shape.
102	Handle not integral with fork or not of the same diameter.
103	Handle not round or slightly rounded.
104	Handle not smoothly finished.
105	Prongs of C-128 or C-256 tuning fork not fitted with cylindrical weights fixed with screws.
106	Weights on prongs of C-128 or C-256 tuning fork not non-adjustable.
107	Tuning fork not legibly and permanently stamped with the specified number of cycles per second.
108	Tuning fork not legibly and permanently stamped with the letter "C".
Minor	
201	Tuning fork not free from sharp edges, rough areas, burrs, cracks, or chips.
202	Tuning fork not legibly and permanently marked with the manufacturer's name or trademark.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:11Z
Check the source to verify that this is the currentversion before use.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

* 4.4.1 Vibrations test. The tuning fork shall be struck sufficiently hard against a nonmetallic object and the length of time shall be recorded that the fork remains in audible vibration by both air conduction and bone conduction.

* 4.4.2 Frequency test. The accuracy of the frequency shall be determined with a suitably calibrated frequency counter.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One tuning fork set, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	24 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

* 5.1.3.1 Unit package. The forks shall be positioned in their respective compartments in the carrying case. Each case shall be packaged in a snug fitting box consttucted in accordance with PPP-B-566 or PPP-B-676 except that commercial colors are acceptable. Closure shall be secured to prevent spilling of contents under normal handling. As an alternate, each case may be packaged in accordance with MIL-P-116, method IC-1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:11Z
Check the source to verify that this is the current version before use.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.1).

5.2.1 Level A.

* 5.2.1.1 Exterior container. Exterior shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification. Special requirements as specified in PPP-B-636 shall apply for fiberboard boxes.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard boxes shall be waterproofed in accordance with paragraph 30.4 of PPP-B-636.

5.2.2 Level B.

* 5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:11Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The tuning fork set is intended for use as a diagnostic aid during medical and neuropsychiatric examinations.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and the procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification is intended to cover the following item appearing in the Federal Supply Catalog:

National Stock No	Item Identification
6515-00-338-9200	TUNING FORK SET

It does not include all types or sizes as indicated by the title nor all types which are commercially available.

* 6.4 Note. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1848

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

)OCUMENT IDENTIFIER AND TITLE

MIL-T-36184A

/AME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:11Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:11Z
Check the source to verify that this is the current version before use.