FED. SUP CLASS
8475

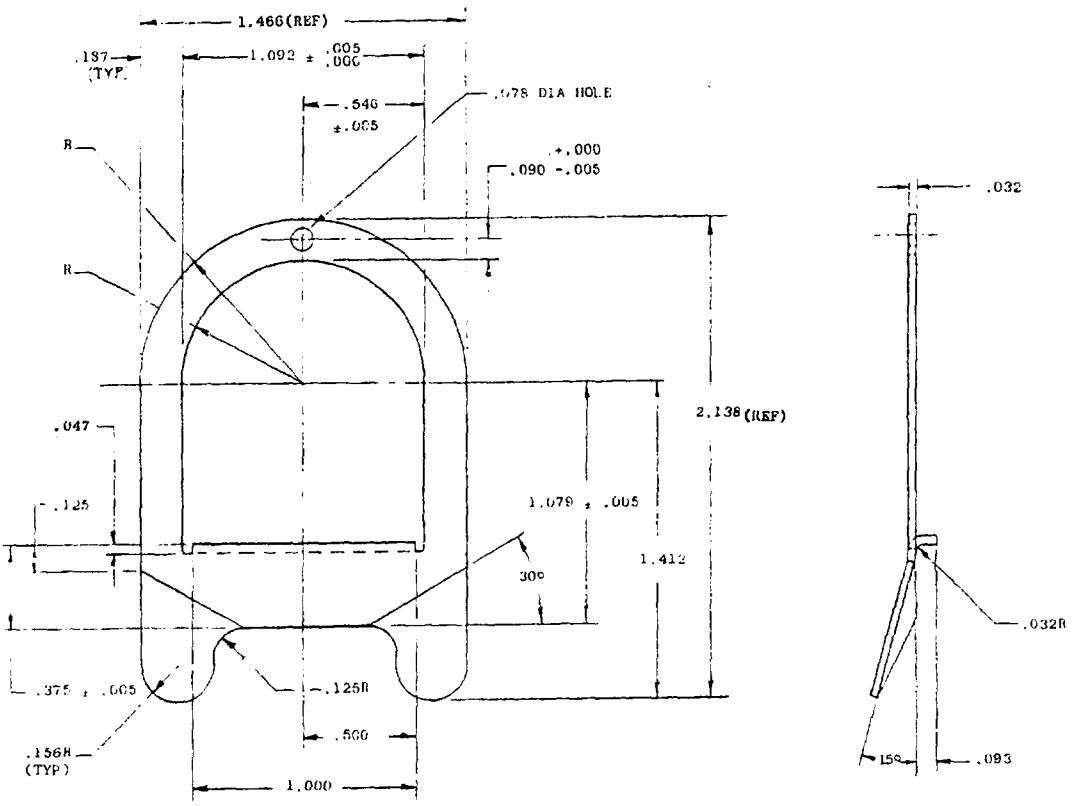

NOTES:

1. MATERIAL: SPRING, LOCK, CORROSION RESISTING STEEL, IN ACCORDANCE WITH QQ-S-766, CL 301, COND FULL HARD.
2. FINISH: SPRING LOCK TO BE PASSIVATED IN ACCORDANCE WITH QQ-P-35.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ± 0° 30'.
4. DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH MIL-STD-8.
5. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
6. USAGE: INTENDED FOR USE ON MS17967, MS17968, MS17970.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 27 APR 1965 REVISED

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-WP Other Cust	TITLE SPRING, LOCK FOR NOZZLE ASSEMBLY	MILITARY STANDARD MS90369(WP)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

PLATE NO. 14936

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.