PROJECT NO. 6685-0429

FED. SUP CLASS
6685

DIAL AND POINTER SHOWN FOR REFERENCE ONLY, SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENT

ELECTRICAL CONNECTOR IN ACCORDANCE WITH MS33678-14S-5P. LOCATE ON VERTICAL AND HORIZONTAL CENTERLINE. POLARIZING PIN SHALL BE LOCATED AT TOP CENTER OF CONNECTOR.

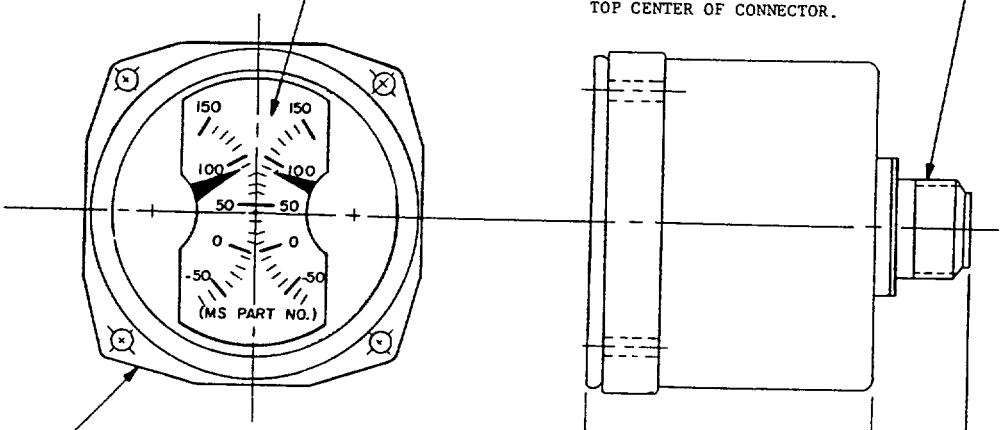

3-INCH CASE IN ACCORDANCE WITH MS33638, EXCEPT AS SHOWN

DASH NO.	POINTER FINISH & DIAL MARKING
-1	LUSTERLESS WHITE
-2	FLUORESCENT LUMINESCENT

(A)

NOTES:
1. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMALS; ±.25.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 1 JUNE 1965 REVISED (A) 30 DEC 71

P.A. NAVY - AS Other Cust ARMY - AV USAF - 82	TITLE INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE, MULTIFUNCTION, -70° TO +150°C, DUAL	MILITARY STANDARD MS90375
PROCUREMENT SPECIFICATION MIL-I-7723	SUPERSEDES: BUAER 51A146A1	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE. PLATE NO. 15320

USER SYMBOLS:
USAF - 82
NAVY - MC, CG

REVIEWER SYMBOLS:
NAVY - AS
ARMY - AV
USAF - 82
NS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.