FED. SUP CLASS.
5355

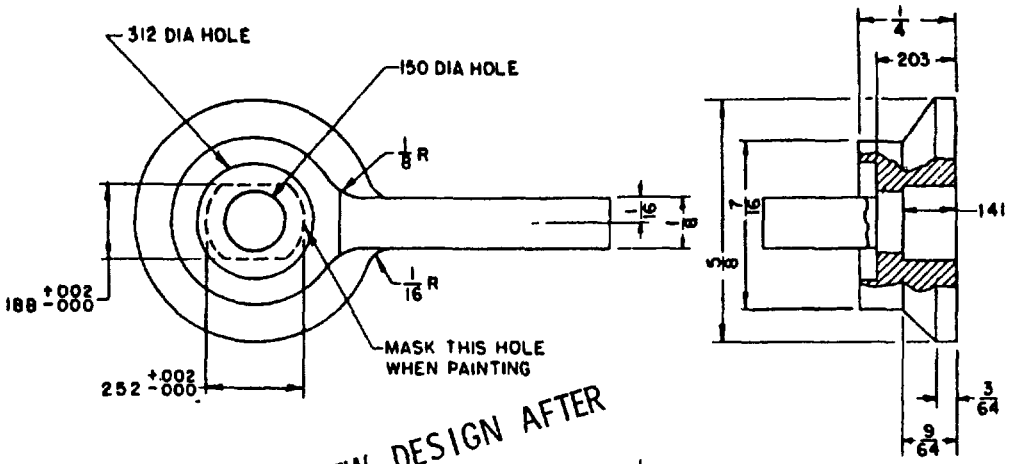

INACTIVE FOR NEW DESIGN AFTER 18 SEPTEMBER 1968

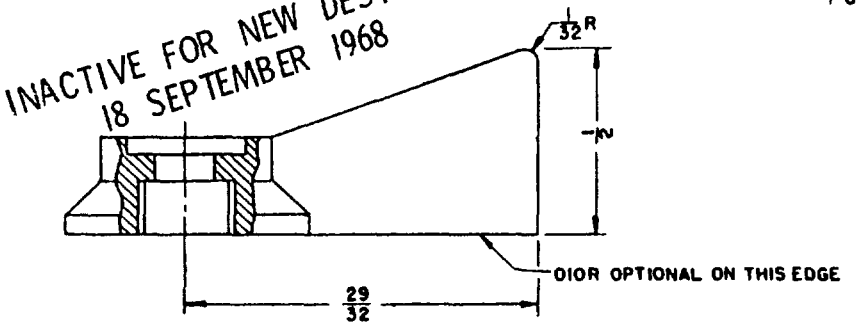

PART NO. MS91523-1	FIIN

NOTES

1 All dimensions in inches

2 Unless otherwise specified, tolerances are ± 1/64 on fractions and ± .005 on decimals

3 Break all corners and edges to .010 radius maximum

4 The casting shall be free of flash, sharp edges, shrink marks, and porosity

5 Plus taper .002 on both dimensions of flatted hole

6 Material shall be aluminum alloy, composition 1, per Specification QQ-A-596

7 The finish shall be semigloss olive drab, type I, per Specification 72-53

8 Referenced specifications shall be of the issue in effect on date of invitation for bids

(B) 9 Qualification not required Quality conformance testing shall be in accordance with Groups A, B and C as required on contracts requiring logistic support

REQUIREMENTS

1 Torque test not applicable

(Project 5355-0091)

APPROVED 15 Sep 1954 REVISED (A) 18 Sep 1968 (B) 6 February 1970

CUSTODIANS: Army - EL Air Force -11	OTHER INT: A — EO	MILITARY STANDARD	MS91523
		KNOB, CONTROL, LEVER, METAL	
PROCUREMENT SPECIFICATION MIL-K-3926	SUPERSEDES	SHEET 1 OF 1	

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:43Z
Check the source to verify that this is the current version before use.