
MILITARY SPECIFICATION SHEET

BATTERY, RECHARGEABLE, NICKEL-CADMIUM, VENTED, AIRCRAFT, BB-716/A, DIODE ASSEMBLY

This specification is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the diode assembly described herein shall consist of this document and the latest issue in effect of Specification MIL-B-49450(ER).

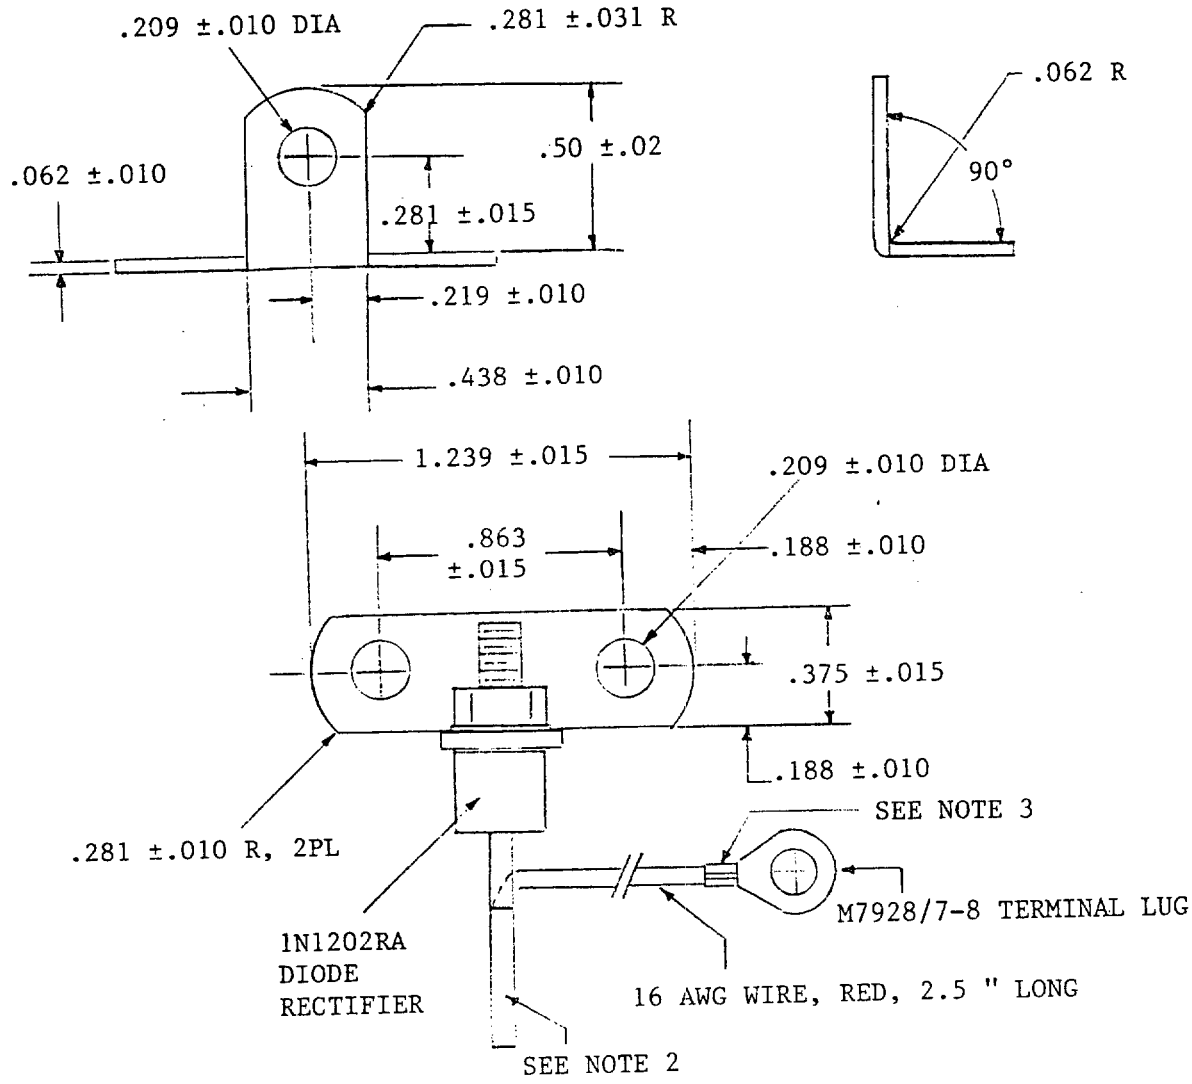

FSC 6140

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. The diode mounting connector shall be constructed of copper alloy conforming to QQ-C-576 or QQ-C-502.

2. The diode mounting connector shall be plated in accordance with QQ-N-290, Class I, Grade E.

3. The diode mounting connector shall be formed with no evidence of visible cracks.

4. The torque range for the 10-32 hexagonal head shall be 20 to 24 in-lbs.

5. The diode mounting scheme shown in the figure is preferred. Alternate mounting configurations may be used upon one time approval by the government.

DRAWING NOTES:

1. All dimensions are in inches, unless specified otherwise.

2. The wire shall be soldered onto the diode terminal per Requirement 5 of MIL-STD-454. The soldered joint shall be potted per Requirement 3.6.6 of MIL-B-49450 (ER). The soldered joint shall be covered by a 0.75 inch long shrinkable tubing.

3. Terminal lug shall be crimped onto wire. The crimped joint shall be potted per Requirement 3.6.6 of MIL-B-49450(ER) and covered by shrinkable tubing.

Preparing Activity:
Army-ER

(Project 6140-A601-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:07Z
Check the source to verify that this is the current version before use.