MIL-S-37337
15 September 1976

MILITARY SPECIFICATION

STOOL, STRAIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a straight stool (footstool), made essentially of carbon steel with an enameled finish.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

TT-C-490	- Cleaning Method and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-491	- Enamel, Glass, Synthetic (for Metal and Wood Hospital Furniture).
ZZ-M-71	- Matting, Rubber and Vinyl.
ZZ-T-351	- Tips, Rubber and Synthetic-rubber, for Crutches, Furniture, etc.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-P-116	- Preservation-packaging, Methods of.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Headquarters, Defense Personnel Support Center, ATTN: Directorate of Medical Materiel, Code ATT, 2800 South 20th Street, Philadelphia, PA 19101, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6530

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

:ANDARDS

FEDERAL

FED-STD-66	- Steel, Chemical Composition and Hardenability.
FED-TEST METHOD STD-151	- Metals, Test Methods.
FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

opies of specifications, standards, and drawings required
ıppliers in connection with specific procurement functions
ld be obtained from the procuring activity or as directed
ıe contracting officer.)

? Other publications. The following document forms a part
ıis specification to the extent specified herein. Unless
'wise indicated, the issue in effect on date of invitation
›ids or request for proposal shall apply.

MERICAN SOCIETY FOR TESTING & MATERIALS (ASTM)

D-903 Peel or Stripping Strength of Adhesive Bonds.

plication for copies should be addressed to the American
ty for Testing & Materials, 1916 Race Street, Philadelphia,
9103.)

REQUIREMENTS

First article. When specified in the procurement
ent, the contractor shall furnish sample unit(s) for first
le inspection and approval (see 4.1.2.1 and 6.2).

Material.

.1 Corrosion-resisting steel. Corrosion-resisting steel
used in the construction of the stool shall conform to
300 series of FED-STD-66 and shall pass the test for
:al composition specified in 4.4.1.

.2 Carbon steel. Carbon steel sheet, strip, and tubing
in the construction of the stools shall conform to AISI 1000
)-STD-66, and shall pass the test for chemical composition
:ied in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

3.2.3 Rubber tips. The rubber tips shall conform to size 20 of ZZ-T-351, except that the height overall shall be 1-5/8 inches minimum and a disc need not be molded into the tip. Tips shall be black in color and non-scuffing.

3.2.4 Matting. The matting shall be rubber or vinyl, 1/8 inch thick, black, with longitudinal corrugations, conforming to ZZ-M-71.

3.3 Design and construction. Design and construction shall be as specified herein and as shown in figure 1. Commercial tolerances on diameters and thicknesses shall be permitted.

3.3.1 Top. The top shall consist of an edge molding, a subtop, a drive molding, and a rubber or vinyl top. The edge molding shall be formed from sheet steel, .0478 inch thick (No. 18, Manufacturers' Standard gage). The edge molding shall be joined at the center of one side by securely spotwelding the ends to a splice member which shall stradle the splice on the inside, or the edge molding shall be fabricated from two "L" shaped sections securely welded, ground, and polished at two opposite corners. The assembled edge molding shall be continuously welded to each leg. The subtop shall be made from sheet steel, .0478 inch thick (No. 18, Manufacturers' Standard gage), and shall be spotwelded to the edge molding on not greater than 3-inch centers. The rubber or vinyl matting shall be securely cemented to the subtop under uniform pressure, with the corrugations running parallel to the long dimension. When tested as specified in 4.4.2, the adhesive strength of the bond shall be at least 5 pounds. The edges of the rubber or vinyl top shall be secured with a drive molding formed from corrosion-resisting steel, .0375 inch thick (No. 20, United States Standard gage).

3.3.2 Legs. The top shall be supported on four legs formed from two lengths of steel tubing not less than 1 inch in diameter and having a wall thickness of .042 inch (No. 19, Birmingham Wire gage). The legs shall be arched type, crossing diagonally from the corners, and flattened at their intersection where they shall be securely joined by welding. The end of each leg shall be closed off flush by plugging or capping, and shall be equipped with a snug-fitting rubber tip (3.2.3).

3.4 Finish. After assembly of the legs, subtop, and edge molding, but prior to assembly of the drive molding, rubber top, and rubber tips, the stools shall be finished as follows.

3.4.1 Cleaning and phosphating. Each unit shall be cleaned in accordance with a method prescribed in TT-C-490 and phosphated conforming to type II.

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:28Z
Check the source to verify that this is the current version before use.

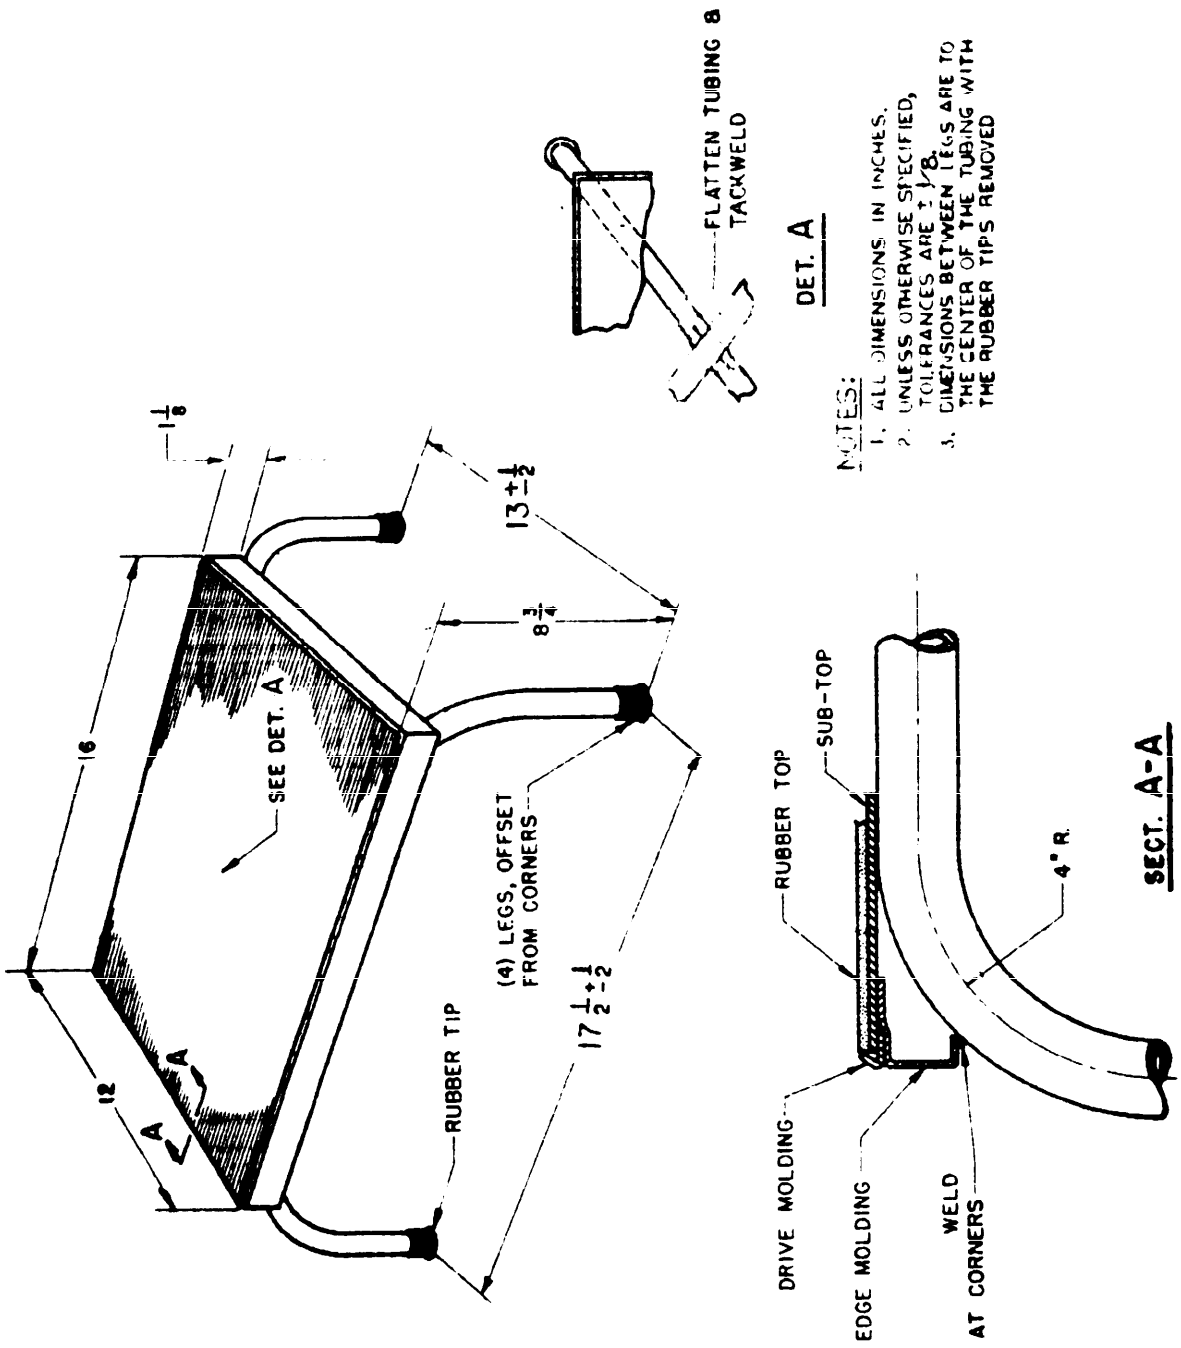


FIGURE 1. Stool

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:28Z
Check the source to verify that this is the current version before use.

3.4.2 Enamel. After priming, each unit shall be finished in an acid and alkali resistant enamel, conforming to Class B of TT-E-491. Two coats of enamel shall be applied and baked to a complete polymerization. The first coat shall be sanded to a smooth finish before the second coat is applied. The final coat shall have a smooth, hard, and tough finish with a permanent luster. Color of the finished enamel shall be light green, color 14241 of FED-STD-595 (see 6.4).

3.5 Identification marking. Stools shall be permanently, clearly, and legibly marked on the underside with the manufacturer's registered trademark and the national stock number.

3.6 Workmanship. Workmanship shall be first class throughout. Item shall be free from defects which detract from its appearance or may impair its serviceability. All burrs and sharp edges shall be removed from the item. The complete stool shall not rock in excess of 1/8 inch when placed on a flat surface.

3.6.1 Welding. Welding shall be durable, sound in every detail and in accordance with the latest practices recommended by the American Welding Society. All welds shall be produced by qualified welding operators with satisfactory welding equipment using satisfactory filler metal or electrode where applicable to provide the best possible weld. Surfaces to be welded shall be free from grease, oil, oxides or any other foreign matter. Any cleaning method which will remove these substances and leave the surface clean is satisfactory. All weld joints shall blend into the adjacent metal in gradual, smooth curves. Beads shall be smooth and free of slag, excessive undercut, or excessive splatter. Sufficient metal shall be added to provide a suitable fillet or reinforcement unless otherwise specified. Welds shall not be oxidized. All welds shall be continuous with no visible voids, pin holes, or cracks.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2.1 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection.
b. Quality conformance inspection.

4.1.2.1.1 First article inspection. First article inspection shall be performed on the stool when a first article sample is required (see 3.1). This inspection shall include examination of 4.3 and tests of 4.4.

4.1.2.1.2 Quality conformance inspection. Quality conformance inspection shall include the examination of 4.3 and tests of 4.4.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the component or material, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and table I.

Source: https://assist.dla.mil -- Downloaded: 202610-21T10:28Z
Check the source to verify that this is the current version before use.

TABLE I. Sampling for examination.

	Inspection level	AQL (percent defective)
For visual examination		
Major defects	II	1.0
Total (major and minor combined)	II	4.0
For dimensional examination	S-3	2.5

4.2.2 For adhesive strength test. Sampling for the tests shall be as specified in 4.4.2.

4.2.3 Raw materials. A sufficient quantity of each lot of each metal used in the manufacture of the stools shall be selected for composition analysis in accordance with 4.4.1.

4.3 Examination. The stools shall be examined to determine compliance with all requirements contained in this specification.

4.3.1 Classification of defects. Examination shall be conducted in accordance with the classification of defects as shown in table II. Examination shall not be restricted to the classified possible defects listed below.

TABLE II. Classification of defects.

Categories	Defects
Major:	
101	Unit has cracks, tears, ruptures, or deformed surfaces.
102	Stool not stable on a flat surface; rock exceeds 1/8 inch.
103	Exposed or accessible edges (notably, flanged edges), corners, or surfaces have burrs, sharpness, or sharp projections.
104	Tubing used to form the legs not flattened at intersection under the stool.
105	Welding connecting the tubing at its intersection not sound, exhibits cracks, or porosity.
106	Legs not arched, not offset, or not shaped as specified; not of equal length.
107	Welding for attaching legs to the top unsound, cracked, or porous.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects - continued

Categories	Defects
Major:	
108	Rubber tips not snug-fitting.
109	End of each leg not finished to preclude damage to rubber tips.
110	Unexposed welds not ground smooth, not clean, have slag or splatters.
111	Rubber matting, edges or corners not securely cemented to top of stool.
Minor:	
201	Finish shows coarse grind marks, chips, or scratched areas.
202	Identification marking not present, complete, legible, correct, and permanent.
203	Rubber matting not cemented flush with top.
204	Corrugations of rubber matting do not run parallel to the length of the stool.
205	Color not as specified.
206	Painted surface shows splatters or orange peel.

4.3.2 Dimensional examination. The stools shall be examined for defects in dimensions. Any dimension not within the tolerances specified herein shall be classified as a defect.

4.3.3 Packaging inspection. The inspection of the preservation-packaging and interior package marking shall be in accordance with the group A and B quality conformance inspection requirements of MIL-P-116. The inspection of the packing and marking for shipment and storage shall be in accordance with the quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests shall be conducted, as necessary, to determine compliance with specification requirements.

4.4.1 Chemical composition. Tests for chemical analysis shall be conducted in accordance with method 111 or 112 of FED-TEST METHOD-STD-151.

4.4.2 Adhesive strength. Testing of the strength of the adhesive bond shall be in accordance with ASTM Standard Method of Test D-903.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning and drying. Each stool shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.1.1.2 Preservative. Preservative shall not be applied.

5.1.1.3 Unit packaging. Each stool shall be packaged in accordance with MIL-P-116, method III. Method III shall be accomplished by having the exterior surfaces of the stool protected by wrapping with kraft paper and cushioning with flexible corrugated fiberboard or other cushioning materials. Wrapping and cushioning material shall be secured with tape or by tying. Work shall be accomplished in such a manner as to insure against marring, scratching, or damage to the stool.

5.1.1.4 Intermediate packaging. Two (2) stools shall be nested, securely tied together, and packaged in a box of appropriate size constructed in accordance with PPP-B-636, type CF, class domestic. Closure of box shall be as specified in the appendix of PPP-B-636.

5.1.2 Level C. Stools shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Six (6) stools shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, class weather-resistant. Closure, waterproofing and strapping shall be as specified in the appendix of the box specification.

5.2.2 Level B. Six (6) stools shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, type CF, class domestic. Closure of the box shall be as specified in the appendix of the box specification.

5.2.3 Level C. Stools shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

5.3 Marking. Each unit, intermediate package and exterior container shall be marked as specified in MIL-STD-129.

6. NOTES

6.1 Intended use. The foot stool is intended for use in hospital wards.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
c. When a first article is required (see 3.1, 4.1.2.1 and 6.3).

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulation. The contract or purchase order specifies the quantity, procedure for delivery and other specific instructions for inspection and approval of the first article.

6.4 Availability of color chips. Requirements for individual color chips should be submitted to the Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120, citing FED-STD-595 together with the appropriate chip number as shown therein.

6.5 This specification covers the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6530-00-299-8545	STOOL, STRAIGHT, Steel, Enameled, 8-3/4 inches High

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
DSA-DM

Project No. 6530-1378

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-S-37337 STOOL, STRAIGHT.

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

GPO 1974 - 603 680 6126 2 1

Source: https://assist.dla.mil -- Downloaded: 202640-21T10:28Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T10:28Z
Check the source to verify that this is the current version before use.