UU-B-25C
July 10, 1972
SUPERSEDING
Int. Fed. Spec. UU-B-0025B(GSA-FSS)
April 7, 1965

FEDERAL SPECIFICATION

BAG, PAPER (INSULATED)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers two (2) types of insulated bags for frozen or perishable food, each type consisting of a single grade.

1.2 Classification.

1.2.1 Types. The bags covered by this specification shall be of the following types, as specified (see 6.1).

Type I - Kraft and foil.
II - Kraft, double-wall.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

UU-P-268 - Paper, Kraft, Untreated, Wrapping.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-1055 - Barrier Material, Waterproofed, Flexible.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-A-148 - Aluminum Foil.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issued is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

U. S. Department of Health, Education and Welfare;

Federal Food, Drug and Cosmetic Act and Regulations Promulgated Thereunder.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Technical Association of the Pulp and Paper Industry (TAPPI) Publications:

T 401 - Fiber Analysis of Paper and Paperboard.
T 402 - Conditioning Paper and Paperboard for Testing.
T 403 - Bursting Strength of Paper.
T 410 - Weight Per Unit Area (Basis Weight or Substance) of Paper and Paperboard.
T 414 - Internal Tearing Resistance of Paper.
T 483 - Odor of Packaging Materials.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, 30 Lexington Avenue, New York, NY 10017.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Type I. The bags shall be fabricated from bleached or unbleached kraft as specified (see 6.1), basis weight 40 pounds (24 x 36 - 500), laminated with aluminum foil not less than 0.0003 inch thick. The aluminum foil shall conform with the requirements of MIL-A-148.

3.1.2 Type II. The bags shall be fabricated from two-ply bleached or unbleached kraft paper as specified (see 6.1), basis weight 40 pounds (24 x 36 - 500). Paper used for the inner liner may be crepe (basis weight 40 pounds before creping) or embossed kraft.

3.1.3 Adhesive. The adhesive used in the fabrication of the bags, shall be waterproof to the extent that there shall be not less than 95 percent fiber failure in the bonded area when tested as specified in 4.6.

3.1.4 Basis weight. The basis weight of single-ply kraft paper used in the fabrication of the bags shall be nominal 40 pounds (24 x 36 - 500) when tested in accordance with 4.6.1. Tolerance for basis weight is minus 5 percent, unlimited plus tolerance.

3.1.5 Bursting strength. The bursting strength of paper used in the fabrication of the bag shall be not less than 22 points when tested in accordance with 4.6.1.

3.1.6 Tearing resistance. The tearing resistance of paper used in the fabrication of the bags shall be not less than 43 grams (machine direction) when tested in accordance with 4.6.1.

3.2 Seams. Seams of the bags effected with adhesive, shall be such that in the dry condition when separated manually, shall show uniform application of the adhesive to the surface laminated together to form the seal.

3.3 Dimensions. Dimensions for the bags shall be inside dimensions $\pm$ 1/4 inch. The contract or order shall specify the size required (see 6.1). The dimensions for all bags are furnished in table I as a guide only. The dimensions of the bags as produced by different manufacturers may vary somewhat and shall be considered acceptable, provided that such bags meet the applicable minimum capacity as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

TABLE I

Capacity	Dimensions (in inches) ± 1/4 inch
1 - pint	4-1/4 x 2-3/4 x 10
2 - quart	5-1/4 x 3-5/8 x 12
1/2 - gallon	6-1/4 x 4-1/4 x 14-1/4
1 - gallon	6-1/2 x 5 x 14-1/4

3.4 Material purity. The materials used to fabricate the bags, shall conform to the provisions of the Federal Food, Drug and Cosmetic Act and Reguations, as amended (see 6.2).

3.5 Construction.

3.5.1 Type I bags. The bags shall be formed from aluminum foil laminated to kraft paper. The aluminum foil shall be the exterior or interior of the bag as specified (see 6.1). The laminating material shall be applied adequately, throughout, between the foil and paper so that the plies shall be securely anchored, one to the other. Center seams and bottom fold shall be formed to the rear.

3.5.2 Type II bags. The bags shall be so constructed that the face with lip, bottom and center seams or overlaps shall be to the rear. The bags shall be made from two plies of bleached or unbleached kraft material (see 3.1.1 and 3.1.2). The factory-closed ends shall be adequately and securely sealed, both to the bottom of the folds and between the plies of paper. Adhesive shall be applied in spots between the two plies at or near the top or open end of the bag to facilitate opening. Seams in successive plies shall be staggered approximately 1-inch.

3.6 Workmanship. The bags shall be clean, well made, neatly formed in such a manner as to lend themselves to easy handling and free from defects which might render them unserviceable, or which might result in damage to the contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Lot size. For purposes of sampling, an inspection lot for acceptance, inspection and test shall consist of all bags of the same type and size made by the same process, from the same components, by one manufacturer under the same conditions and during a continuous manufacturing process. For the purpose of establishing lot size for determination of sample size, the unit of product for inspection under 4.5.2 and 4.5.3 shall be one package, and for inspection under 4.5.4, one shipping container, bundle or fiberboard box.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4 Inspection of materials. In conformance with 4.1, the supplier is responsible for insuring that material used for the bags were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification. In the event of conflict this specification shall govern.

4.5 Examination of the end item.

4.5.1 Inspection levels and acceptable quality levels (AQL's) for examinations. The inspection levels, for determining the sample size, and the acceptable quality levels (AQL's) expressed as defects per 100 units, shall be as follows:

Examination paragraph	Inspection levels	AQL's
4.5.2	S-3	4.0
4.5.3	S-2	2.5
4.5.4	S-2	---
4.5.5	S-2	4.0

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:19Z
Check the source to verify that this is the current version before use.

4.5.2 Examination of the end item for defects in construction and workmanship.

Examine	Defects
Type	Not type specified.
Appearance	Surface not clean; presence of any foreign matter; tear, split or puncture; chafed spot or scuff mark which weakens paper.
Construction	Seams do not adhere securely throughout their entire area. Lip, bottom and center seams or overlaps not at rear.

4.5.3 Examination of the end item for dimensional defects. The sample unit for this examination shall be one bag. (NOTE: Method of measuring the bags shall be perfcrmed in accordance with 4.5.6)

Examine	Defects
Dimensions	Length, face width or tuck width not as specified in table I or table II for the applicable type and size of bag.

4.5.4 Examination of end item for count per package. The sample unit for this examination shall be one unit package (bundle) of bags. The average count per package shall be not less than the specified quantity (see table II).

4.5.5 Examination of preparation for delivery. An examination for defects shall be made to determine that packaging, packing and markings comply with the requirements of section 5 of this specification. The sample unit shall be one shipping container. Shipping containers fully prepared for delivery shall be examined for closure defects.

Examine	Defects
Packaging	Not in accordance with contract requirements; packages not wrapped and secured as specified. Mixed types, grades or sizes in unit packages.
Packing	Not level specified; not in accordance with contract requirements. Arrangements and number of packages per shipping container not as specified (see table II). Container material not as specified; closures not accomplished by specified or required methods or materials.
Weight (as applicable)	Gross or net weight exceeds contract requirements.
Markings	Illegible, incorrect, incomplete, omitted, or not in accordance with contract requirements.

4.5.6 Method of measuring the bags.

4.5.6.1 Face width, A. Measure along the front face of the folded bag (see fig. 1).

4.5.6.2 Bag length, B. Measure along center of the front face of the bag, from the bottom to the top of the serrated edge (see fig. 1).

4.5.6.3 Bag gusset (tuck), C. Measure across flattened area of square type bag (see fig. 1).

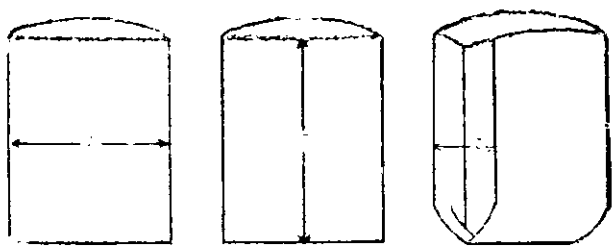


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

4.6 Tests. Test procedures and controls, which differ from those specified herein, may be used by the supplier if they provide a quality assurance equivalent to that specified. If the Government inspection activity determines that such procedures and controls do not provide, as a minimum, such quality assurance, the supplier will use the test procedures set forth herein. In case of dispute as to test results, the test methods specified herein will govern.

4.6.1 Test methods. The following tests shall be conducted in accordance with the indicated TAPPI standards:

Test	TAPPI Standard
Fiber Content	T 401
Conditioning	T 402
Bursting Strength	T 403
Basis Weight	T 410
Tearing Resistance	T 414
Odor of Packaging Materials	T 483

4.6.2 Adhesive test. Cut the length of the seam from a bag, with not less than one-half inch of paper on each side of the seam and immerse in distilled water at a depth of not less than one inch. After five hours, remove the specimen from the bath and separate the seamed area by hand. Examine the pre-bonded surfaces and report the percentage of fiberless separation to the nearest percent. If the fiberless area is less than five percent (see 3.1.3), two additional specimens are to be tested in a like manner for confirmation.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.1).

5.1.1 Level A or B. Bags of one type and size only, shall be stacked flat, reversed in lifts of fifty tied with string, or wrapped with a kraft paper band secured by gluing or taping.

5.1.2 Level C. Bags of one type and size only, in the quantities specified in table II, shall be stacked flat and packaged to afford adequate protection against deterioration and physical damage during shipment from the supply source to the receiving activity.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.1).

5.2.1 Level A. Bags of one type and size only, packaged as specified in 5.1.1, shall be packed in the quantities specified in table II, with the stacks compactly arranged and then wrapped with two sheets of kraft paper 60 pounds (minimum) basis weight, conforming to grade B of UU-P-268, to form a bundle. In addition, one overwrap of waterproof barrier material conforming to grade B-2 of PPP-B-1055, shall be applied. Paper wrappings and barrier material shall overlap a minimum of four inches lengthwise and girthwise. Each bundle shall then be securely cross-tied, with one cross tie over the center of each stack, with twine or cotton rope knotted at each cross-over to prevent loosening or untying. The twine or cotton rope shall have a breaking strength of not less than one and one-half times the weight of the finished bundle. Alternatively, paper used for wrappings to form the bundles shall to the following: The inner wrap shall be kraft paper 60 pounds (minimum) basis weight, conforming to grade B of UU-P-268. The middle and outer wraps shall be wet-strength, heavy duty shipping sack kraft paper having a minimum basis weight of 60 pounds per ream (24 x 36 - 500). The paper wrappers shall overlap a minimum of 4 inches lengthwise, girthwise and be cross-tied as specified above.

5.2.2 Level B. The bags shall be packed as specified in 5.2.1, except that the overwrap of waterproof barrier material is not required. Alternatively, bags of one type and size only may be packed in a close-fitting box (without void space) conforming to PPP-B-636, class domestic. Closure shall be in accordance with the method I requirements in the appendix of the box specification.

5.2.3 Level C. Bags of one type and size only, packaged as specified in 5.1.1, shall be packed in the quantities specified in table II, in shipping containers that will insure carrier acceptance and safe delivery at the lowest transportation rate for such supplies. Shipping containers shall be in accordance with the Uniform Freight Classification rules or National Motor Freight Classification rules, as applicable.

5.3 Marking. In addition to markings required by the contract or order, the bundles and shipping containers shall be marked in accordance with Fed. Std. No. 123 or MIL-STD-129, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Type and size of bag required (1.2.1, tables I and II).
(c) Inspection responsibility, methods and tests (section 4).
(d) Whether certificate of compliance is required for purity of materials (see 3.4).
(e) Applicable level of packaging and packing (5.1 and 5.2).

6.2 Intended uses.

6.2.1 Types I and II insulated bags are used primarily for the packaging of frozen, chilled or heated perishable foods.

6.3 Standard pack (civil agencies). The standard pack for this commodity shall be as specified in 5.1.1. The standard pack requirements are intended for use in procurement of stores stock replenishments. Procuring officers should use the standard pack requirements when it is known that the material will be shipped from a supplier to a domestic warehouse, and/or shipment to eventual user.

TABLE II. Packing quantities

Type		Quantity per Shipping container
I	4-1/4 x 2-3/4 x 10	1,000
I	5-1/4 x 3-5/8 x 12	1,000
I	6-1/4 x 4-1/4 x 15	1,000
I	6-1/4 x 5 x 15	1,000
II	4-1/4 x 2-3/4 x 10	500
II	5-1/4 x 3-5/8 x 12	500
II	6-1/4 x 4-1/4 x 15	500
II	6-1/4 x 5 x 15	500

Preparing activity:

GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain copies and other documents referenced herein. Price 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.