FEDERAL SPECIFICATION

BAG, PAPER (INSULATED)

This amendment, which forms a part of Federal Specification UU-B-25C, dated July 10, 1972, was approved by the Commissioner, Federal Supply Service, General Services Administration for the use of all Federal agencies.

PAGE 2

3.1.2; Delete and substitute:

3.1.2 Type II. The bags shall be fabricated from two-ply bleached or unbleached kraft paper, as specified (see 6.1) basis weight 40 pounds (24 x 36 - 500). The inner liner may also be a wet-strength creped kraft paper (basis weight 40 pounds before creping) or embossed kraft paper.

3.1.3; First line, after "Bags" add "at the bottom seam (or fold) and center seam,"

3.2; Delete "Seams of the bags" and substitute "the bottom seam (or fold and center seam,"

3.3 Delete and substitute:

3.3 Dimensions. Unless otherwise specified (see 6.1), bag dimensions shall be inside measurements, ± 1/4 inch as specified in Table I, exclusive of lip".

PAGE 3

Delete and substitute new "TABLE I".

TABLE I

Capacity	Dim. in inches, ± 1/4 inch (A) Face width	(B) Gusset	(C) Length
1-Pint	4-1/4	2-3/4	10
1-Quart	5-1/4	3-5/8	12
1/2-Gallon	6-1/4	4-1/4	14-1/4
1-Gallon	6-1/2	5	14-1/4

3.5.1: Delete last sentence and substitute "Center seams and bottom seams (bottom fold) shall be formed to the rear on the same face."

4.3: Delete and substitute:

4.3 Inspection and testing. Sampling for inspection and testing shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter."

PAGE 4

4.5.5, under "packaging defects": Delete "packages not wrapped and secured as specified". Delete "grades", third line.

4.5.5, under "packing defects": Delete "arrangements and number of packages" and substitute "arrangement".

4.5.6.2: Delete and substitute:

4.5.6.2 Bag gusset (B). Measure across flattened area of the bag (see B, Figure 1)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

PAGE 4 (con.)

4.5.6.3 Bag length (C). Measure along center of the bag face from the bottom of the top edge (see C, Fig. 1)."

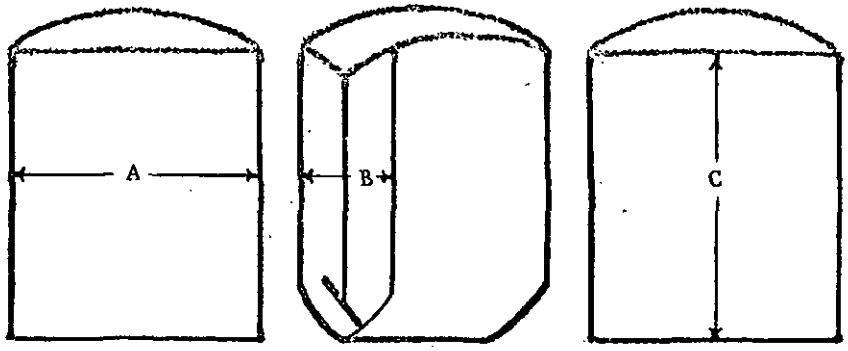


FIGURE 1

PAGE 5

4.6.2, first sentence: Delete and substitute "Cut the full width of a bottom seam (or bottom fold) from the bag, the entire center seam, with not less than one-half inch of paper on each side of the seam and immerse in distilled water (room temperature) at a depth of not less than one inch."

4.6.2, second sentence: Delete "five hours" and susbtitute "one hour".

4.6.2, line 5: Delete "than" and substitute "the".

5.1.1: Delete and substitute the following:

5.1.1 Level A or B. Bags of one type and size only, in quantities as specified in table II, shall be stacked flat in accordance with the manufacturer's commercial practice assembled into a package.

5.2.3 Level C. The bags shall be packed to assure carrier acceptance and safe delivery to destination. Containers shall comply with the requirements of the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.

6.1; Add to list of options as follows:

(f) Whether foil shall be exterior or interior of bag (see 3.5.1)."
(g) State whether bleached or unbleached kraft (see 3.1.1 and 3.1.2)."

6.3; Delete in its entirety.

Delete "TABLE" and substitute new "TABLE II".

TABLE II. Packing quantities

Type	Dimension	Reversed qty. per package	Quantity per shipping container
I	4-1/4 x 2-3/4 x 10	50	1000
I	5-1/4 x 3-5/8 x 12	50	1000
I	6-1/4 x 4-1/4 x 14-1/4	50	1000
I	6-1/2 x 5 x 14-1/4	50	1000
II	4-1/4 x 2-3/3 x 10	50	500
II	5-1/4 x 3-5/8 x 12	50	500
II	6-1/4 x 4-1/4 x 14-1/4	50	500
II	6-1/4 x 5 x 14-1/4	50	500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:19Z
Check the source to verify that this is the current version before use.