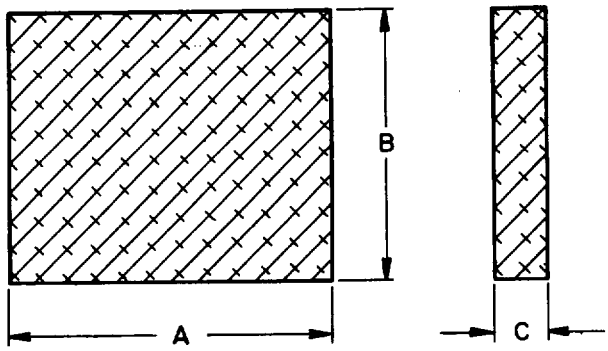

TABLE I. DASH NUMBERS.

DASH NO	A	B	C	TEMPER	FORMING PROCESS
001	144	48	.140	T6	R
003	144	48	.050	O	R
005	144	48	.020	T6	R
007	144	48	.016	T6	R
009	144	48	.071	T6	R
011	144	48	.180	T6	R
013	144	48	.016	O	R
015	144	48	.025	O	R

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 7075, (UNS A97075) AS SPECIFIED IN QQ-A-250/12.
2. FORMING PROCESS. ROLLED (CODE R).
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14360R001

- DASH NUMBER FROM TABLE I
- ROLLED (SEE REQUIREMENT 2)
- BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-184 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
NAVY-MC,OS,SH

REVIEWER ACTIVITIES:
AIR FORCE-84
DLA-IS

APPROVED 22 May 1984 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AS MR 99		SHEET, ALUMINUM ALLOY 7075	MS14360
PROCUREMENT SPECIFICATION QQ-A-250	SUPERSEDES:		PAGE 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:41Z
Check the source to verify that this is the current version before use.