NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bu Wep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
5930

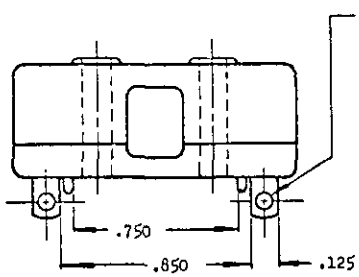

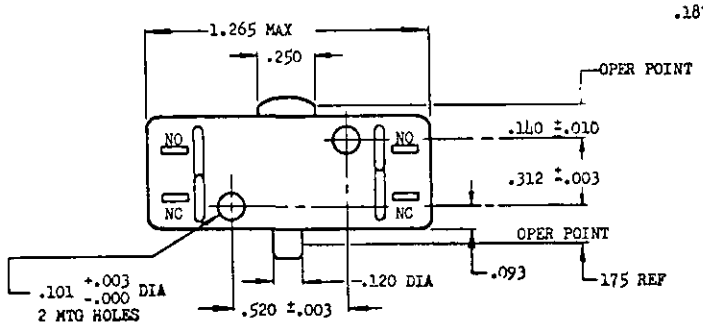

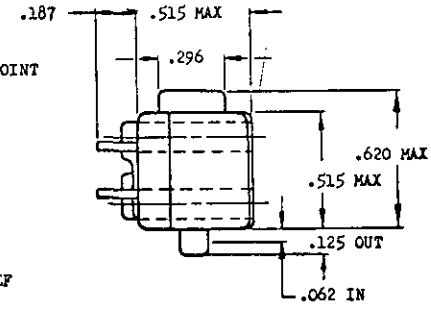



CIRCUIT

DASH NO.
-1

(B)	ACTUATING FORCE	.62 LBS MAX
(E)	PRETRAVEL	.060 MAX
(F)	MOVEMENT DIFFERENTIAL	.025 MAX
(G)	OVERTRAVEL	.015 MIN
(I)	MINIMUM OPERATING CYCLES	100,000
(J)	WEIGHT	.03 LBS MAX
(K)	STRENGTH OF PUSH BUTTON AND PUSH BUTTON STOP	25 LBS
(L)	STRENGTH OF TERMINALS	5 LBS
(N)	CONTACT GAP	DOUBLE .020
(P)	AMBIENT TEMPERATURE RANGE	-70° to +190°C
(Q)	RESET BUTTON	
	PRETRAVEL	.060 MAX
	OVERTRAVEL	.005 MIN

CURRENT CAPACITY 28 VOLTS DC			CURRENT CAPACITY 115 VOLTS, 400 CYCLES AC		
RESISTIVE	INDUCTIVE	MOTOR	RESISTIVE	INDUCTIVE	MOTOR
10	10	6	10	10	6

MATERIAL: CASE, COVER AND PUSH BUTTON: DIALLYL PHTHALATE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.

EXACT SHAPE OF SWITCH OPTIONAL, PROVIDED DIMENSIONS SPECIFIED ARE NOT EXCEEDED.
TEST REQUIREMENT: FOR SHORT CIRCUIT TEST, USE SIZE AN-18 CABLE AND CIRCUIT BREAKER MS25017-10.

Ⓑ CANCELLED - For procurement use MIL-S-8805/14

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-513/A-2343

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 13 Oct 58 REVISED (A) 25 May 60 (B) 11 OCT 68

P.A.	TITLE	MILITARY STANDARD
Navy - AS Other Cust USAF 85 NAVY AS	SWITCH, SENSITIVE - MAINTAINED 10 AMP, 2 CIRCUIT, SIDE SOLDER TERMINAL	MS25346(ASG)
PROCUREMENT SPECIFICATION MIL-S-6743	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T15:09Z
Check the source to verify that this is the current version before use.