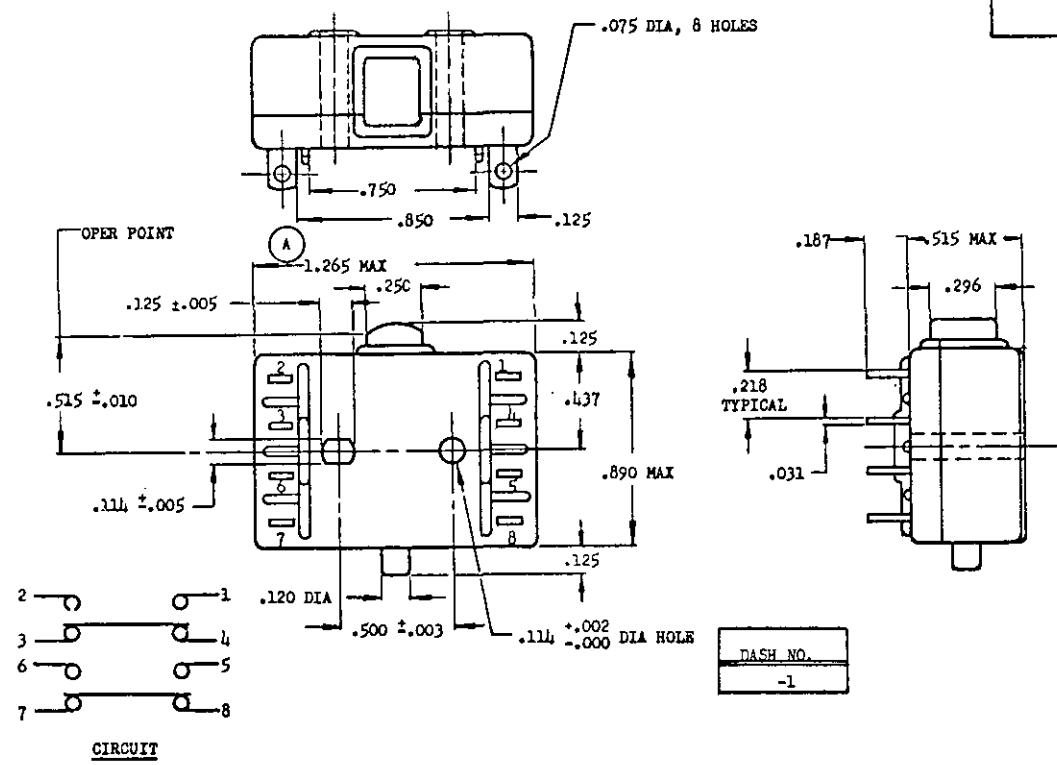

CIRCUIT

DASH NO.
-1

(B)	ACTUATING FORCE	1.25 LBS MAX
(E)	PRETRAVEL	.060 MAX
(F)	MOVEMENT DIFFERENTIAL	.035 MAX
(G)	OVERTRAVEL	.015 MIN
(I)	MINIMUM OPERATING CYCLES	100,000
(J)	WEIGHT	.05 LBS MAX
(K)	STRENGTH OF PUSH BUTTON AND PUSH BUTTON STOP	25 LBS
(L)	STRENGTH OF TERMINALS	5 LBS
(N)	CONTACT GAP	DOUBLE .020
(P)	AMBIENT TEMPERATURE RANGE	-70° to +190°C
(Q)	RESET BUTTON	
	PRETRAVEL	.060 MAX
	OVERTRAVEL	.005 MIN

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 13 Oct 58 REVISED (A) 25 May 60 (B) 11 OCT 68

(B) CANCELLED - For procurement use MIL-S-8805/16

CURRENT CAPACITY 28 VOLT DC			CURRENT CAPACITY 115 VOLTS, 400 CYCLES AC		
RESISTIVE	INDUCTIVE	MOTOR	RESISTIVE	INDUCTIVE	MOTOR
15	10	10	15	15	6

MATERIAL: CASE, COVER AND PUSH BUTTON: DIALLYL PHTHALATE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.

EXACT SHAPE OF SWITCH OPTIONAL, PROVIDED DIMENSIONS SPECIFIED ARE NOT EXCEEDED.
TEST REQUIREMENT: FOR SHORT CIRCUIT TEST, USE SIZE AN-16 CABLE AND CIRCUIT BREAKER MS25017-15.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF 85 Other Cust USAF 85	TITLE SWITCH, SENSITIVE - MAINTAINED 15 AMP, 4 CIRCUIT, SIDE SOLDER TERMINAL	MILITARY STANDARD MS25351(ASG)
PROCUREMENT SPECIFICATION MIL-S-6743	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (LIMITED DISTRIBUTION) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE. 5930-F230-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968 -341-513/A-2401