This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
OSA - 15

User activities:

P.A. USAF - 62
Other Coord.

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:
NONE

TITLE
SEAL, PLAIN, RUBBER, SYNTHETIC
OIL RESISTANT, (-65 TO +275°F),
MOLD IN GROOVE

MILITARY STANDARD
MS27195 (USAF)

SHEET 1 OF 1

DD FORM 1426 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32±0-3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

DRAWN BY _____ DATE _____

TYPED BY _____

CHECKED BY _____

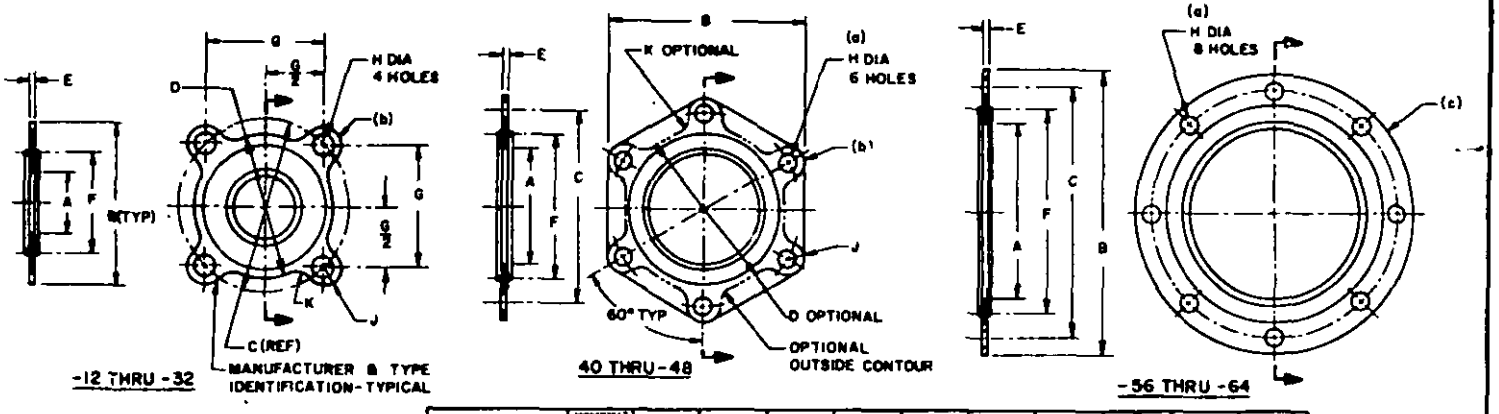



ENLARGED SECTION
TYPICAL FOR ALL SIZES

MS PART NO.	NOMINAL TUBE O.D. REF	A DIA.	B	C DIA.	D DIA.	E ±.004	F DIA.	G	H +.010 -.005 DIA.	J RAD.	K RAD.
MS -12	3/4	.669	1 19/32	1.635	1 1/4	.080	61/64	1.156	.205	7/32	7/32
MS -12-16	3/4	.669	1 3/4	1.856	1 1/2	.080	1 13/64	1.312	.205	7/32	7/32
MS -16	1	.904	1 3/4	1.856	1 1/2	.080	1 13/64	1.312	.205	7/32	7/32
MS -16-24	1	.904	2 3/8	2.563	2 1/8	.080	1 47/64	1.812	.266	9/32	9/32
MS -20	1 1/4	1.138	2 3/16	2.342	1 27/32	.080	1 1/2	1.656	.266	17/64	17/64
MS -20-24	1 1/4	1.138	2 3/8	2.563	2 1/8	.080	1 47/64	1.812	.266	9/32	9/32
MS -24	1 1/2	1.372	2 3/8	2.563	2 1/8	.080	1 47/64	1.812	.266	9/32	9/32
MS -32	2	1.841	3	3.359	2 3/4	.080	2 13/32	2.375	.328	5/16	5/16
MS -40	2 1/2	2.341	4	3.812	3 1/4*	.090	2 53/64		.328	3/8	3/8*
MS -48	3	2.841	4 1/2	4.312	3 3/4*	.090	3 5/16		.328	5/8	3/8*
MS -56	3 1/2	3.341	5 9/16	4.875		.090	3 13/16		.328		
MS -64	4	3.841	6 1/8	5.438		.090	4 5/16		.328		

(a) H DIAMETER HOLES MUST BE EQUALLY SPACED ON C DIAMETER WITHIN .005.
(b) COLOR MARKINGS: ON SIZES -12 THRU -48, OUTSIDE EDGE SHALL HAVE AT LEAST 3 NON-PERMANENT YELLOW COLORED MARKINGS MORE THEN 1/4 LONG TO INDICATE TYPE OF SEAL.
(c) COLOR MARKINGS: ON SIZES -56 THRU -64, OUTSIDE EDGES SHALL HAVE NON-PERMANENT YELLOW COLORED MARKING EXTENDING AT LEAST THREE-QUARTERS OF THE WAY AROUND THE PART.

(A) MATERIAL: METAL RETAINER; ALUMINUM ALLOY, SPEC. QQ-A-250/11, TEMPER T6. ANODIZE TO MIL-A-8625, TYPE-II.
RUBBER SEAL: RUBBER PER SPEC. MIL-R-7362, COMPOSITION-A, TYPE-II.
REMOVE ALL BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES; DECIMALS ±.005, FRACTIONS ±1/64, ANGLES ±1/2°.
INDIVIDUALLY PACKAGE PER SPEC. MIL-P-116, METHOD IC-1.
PRODUCT SHALL BE PERMANENTLY IDENTIFIED AS TO MANUFACTURER AND TYPE.
SEAL DESIGN MUST PROVIDE SUBSTANTIAL FILLING OF THE GROOVE WHEN ASSEMBLED.
FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
*SUGGESTED DIMENSIONS FOR "D" AND "K" SIZES (-40 THRU -48).

FED. SUP CLASS 5330

APPROVED 20 JULY 1962 REVISED (A) 18 JUL 75

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.