FED. SUP CLASS
6625

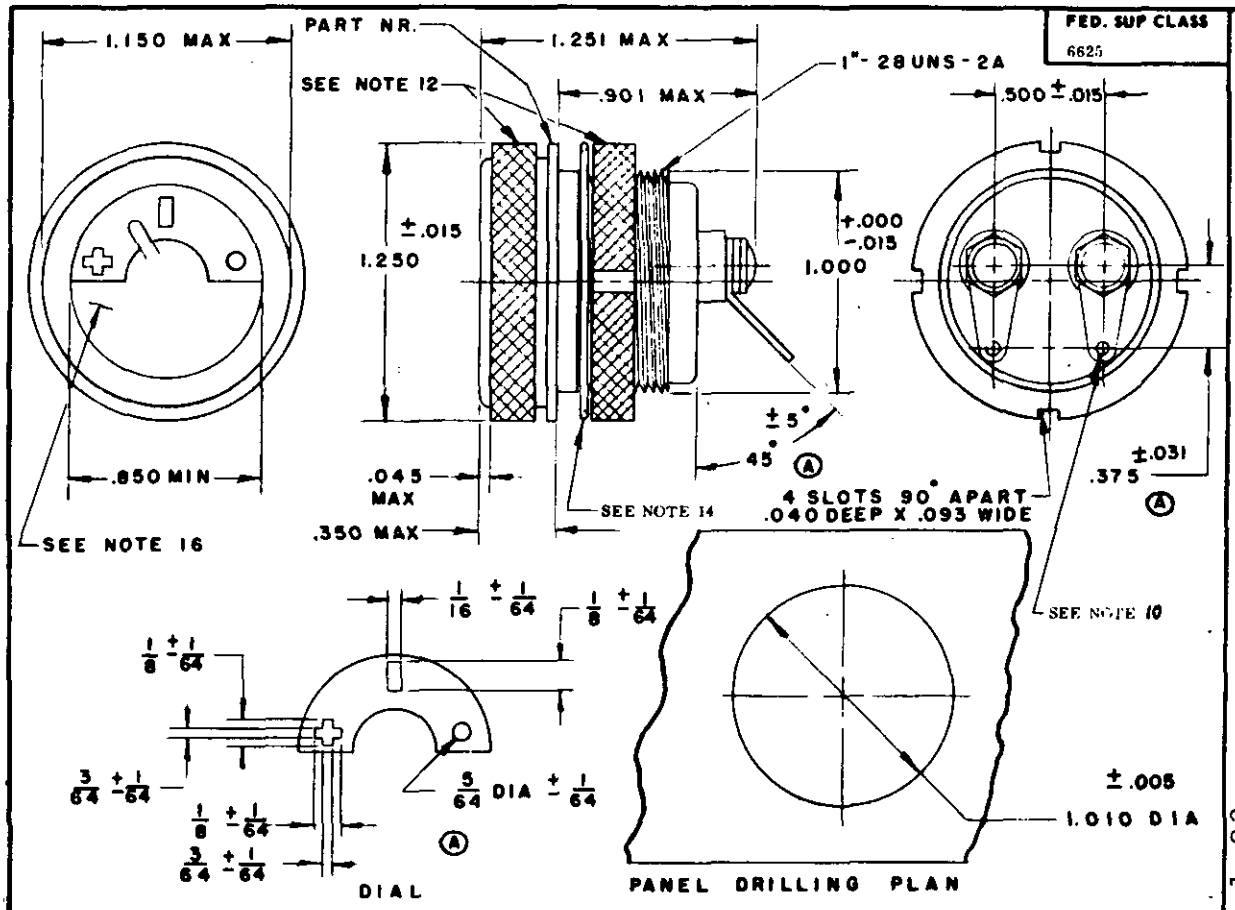

Ⓑ CANCELED AFTER 18 Jul 83. NO SUPERSEDING STANDARD.

MANUFACTURER MS 27596-1 Ⓐ

SHROUD MARKING ILLUSTRATION

1. METER MOVEMENT: MECHANISM SHALL PROVIDE 200-0-200 MICROAMPERES ± 10 % RANGE BETWEEN DIAL MARKINGS. (SEE NOTE 7)
2. RESPONSE TIME: 5 SECONDS MAX.
3. DAMPENING FACTOR: OVERDAMPED (NO OVERSHOOT)
4. FACE DIAL: BLACK BACKGROUND, WHITE CENTER MARKER, WHITE DOT AND CROSS.
5. NEEDLE: 1/16 ± 1/64 INCH WIDE AND COLORED WHITE.
6. DEFLECTION: METER SHALL DEFLECT CLOCKWISE WHEN POSITIVE VOLTAGE IS APPLIED TO THE PLUS TERMINAL.
7. SCALE FACE: AS PER ABOVE FIGURE.
8. ADD A 10 K RESISTOR ±5% IN SERIES WITH THE METER MOVEMENT AND ENCLOSED IN THE BODY OF THE METER.
9. METER SHOULD BE ABLE TO WITHSTAND A 500 μA LOADING FOR 1 HOUR WITHOUT DAMAGE.
10. THE SOLDER LUG TERMINALS SHALL ACCOMODATE WIRE OF A DIAMETER OF .065.
11. ALL DIMENSIONS IN INCHES.
12. KNURLED EDGE REQUIRED FOR MOUNTING, OPTIONAL FOR FRONT FLANGE.
13. REFERENCED SPECIFICATION SHALL BE OF THE ISSUE ON DATE OF INVITATION FOR BIDS.
14. "O" RING, AN PART NO. AN 6227-18.
15. THE DASH NO. ADDED TO THE MS MILITARY STANDARD NUMBER CONSTITUTES THE MS PART NUMBER, FOR EXAMPLE MS 27596-1.
16. SHROUD DESIGN IS OPTIONAL.
17. METER FACE MOUNTING SCREWS AND NUTS MUST BE BLACK.

DASH NO.	TYPE
-1	MR05B 2 H2 DC1A

APPROVED 17 MAY 1968 REVISED Ⓐ 1 AUG 1969 Ⓑ 18 Jul 83

This standard has been approved by the Department of the Air Force and is mandatory for use by their activity. All other military activities are required to employ this standard where suitable.

P.A. AF - 82	TITLE	MILITARY STANDARD
Other Cust AF - 99	METER, ARBITRARY SCALE, 1 INCH, D.C. (NULL INDICATING) Ⓐ	MS27596(USAF)
PROCUREMENT SPECIFICATION MIL-M-17275	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 65 672-1 (Limited coordination)

EDITION OF 1 SEP 57 MAY BE USED.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-511/A-1383

Source: https://assist.dla.mil -- Downloaded: 202640-23T16:44Z
Check the source to verify that this is the current version before use.