INCH-POUND

MS27625B
14 September 2005
SUPERSEDING
MS27625A
29 September 2000

DETAIL SPECIFICATION SHEET

WIRE, RETAINER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83296.

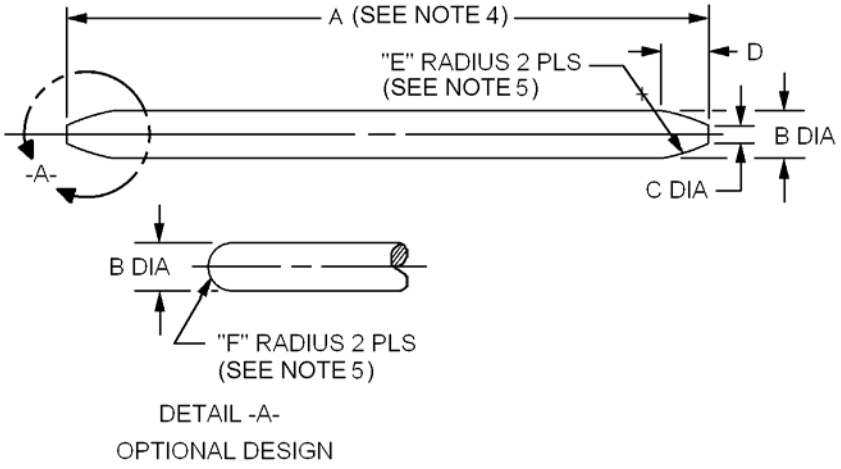

Part or Identifying Number (PIN)	A ±.015 (0.38 mm)	B +.000 -.004 (+0.00 -0.10 mm)	C ±.010 (0.25 mm)	D (mm)	E +.010 -.000 (+0.25 -.000 mm)	F (mm)
MS27625-4C	1.438 (36.53)	.080 (2.030	.020 (0.51)	.073 (1.85)	.156 (3.96)	.030 (0.76)
MS27625-6C	1.735 (44.07)	.095 (2.41)	.023 (0.58)	.087 (2.21)	.186 (4.72)	.037 (0.94)
MS27625-8C	2.203 (55.96)	.095 (2.41)	.023 (0.58)	.087 (2.21)	.186 (4.72)	.037 (0.94)
MS27625-10C	2.625 (66.68)	.125 (3.18)	.031 (0.79)	.115 (2.92)	.246 (6.25)	.050 ±.010 (1.27 ±0.25)

FIGURE 1. Retainer wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Unless otherwise specified all tolerances shall be ± .005 inch (0.13 mm).
4. Wire shall be straight within .020 inch (0.51 mm) full indicator movement.
5. Unless otherwise specified radius shall be concentric to wire OD within .005 inch (0.13 mm) full indicator movement.
6. Unless otherwise specified radius or break all corners to .005 +.005/-.000 inch (0.13 + 0.13/-.000 mm).
7. Radius shall be concentric to wire OD within .005 inch (0.13 mm) full indicator movement.
8. Surface roughness, as specified in ASME B46.1, shall not exceed 125µ inches (3.18 µm) nominal roughness average ($R_{a)}$.

FIGURE 1. Retainer wire - Continued.

REQUIREMENTS:

Dimensions and configurations, see figure 1.

This is a design specification sheet for manufacturing purposes.

This specification sheet describes retainer wire used with MIL-DTL-83298 hose. Next assemblies are MS27620, MS27621, MS27633, and MS27634. The item is only procured as an integral part of an adapter assembly.

Material shall be a corrosion resistant steel (CRES), class 304 or 305, condition A in accordance with ASTM A313/A313M or ASTM A580/A580M.

Finish: Retainer wire shall be passivated in accordance with SAE-AMS-QQ-P-35. Dry-film lubricant shall be in accordance with MIL-PRF-46010.

PIN:

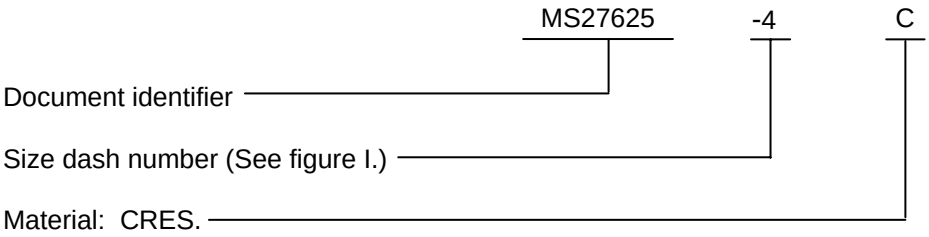

Referenced documents. In addition to MIL-DTL-83296, this document references the following:

ASME B46.1	MS27620
ASTM A313/A313A	MS27621
ASTM A580/A580M	MS27633
MIL-DTL-83298	MS27634
MIL-PRF-46010	SAE-AMS-QQ-P-35

Marginal notations. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Review activities:
Navy - MC, SA
Air Force - 71

Preparing activity:
DLA - CC

(Project 4730-2697-000)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.