FED. SUP CLASS
1670

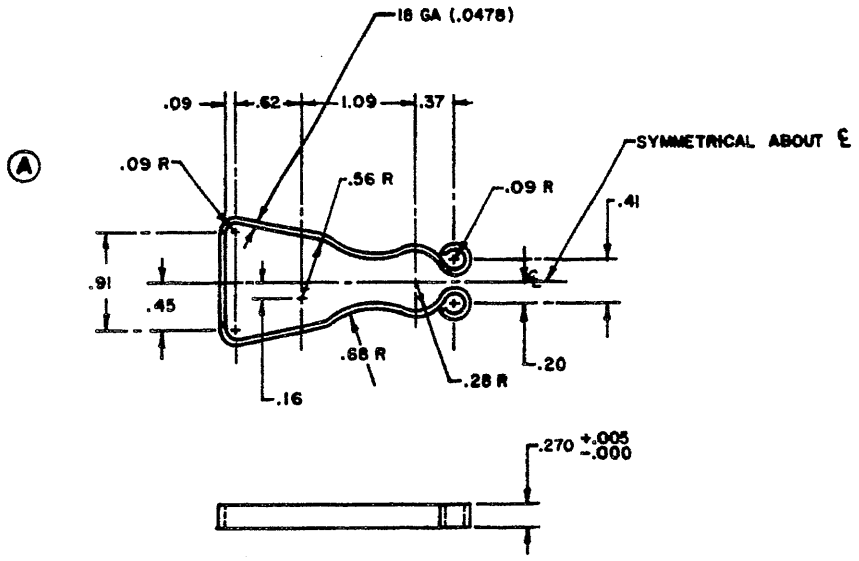

NOTES:

1. MATERIAL: STEEL MIL-S-7947.
2. (A) FINISH: MIL-P-16232 TYPE Z, CLASS 4B FOLLOWED BY WAX EMULSION MIL-W-3688.
3. HEAT TREATMENT: HEAT TREAT TO SPRING TEMPER AFTER FORMING, IN A/W MIL-H-6875.
4. (A) DIMENSIONS SHALL BE IN INCHES UNLESS OTHERWISE SPECIFIED.
   TOLERANCES: DECIMALS ± .03
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 17 JUNE 70 REVISED (A) 5 FEB 75

User activities:

Review activities:
ARMY - AV

THIS MIL STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES E DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEER D DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. USAF - 82 Other Cust Army - GL Navy - AS	TITLE CLIP — PARACHUTE HARNESS QUICK RELEASE, SAFETY	MILITARY STANDARD MS 27759
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: USAF DWG 44A9348	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:50Z
Check the source to verify that this is the current version before use.