FED. SUP CLASS
1670

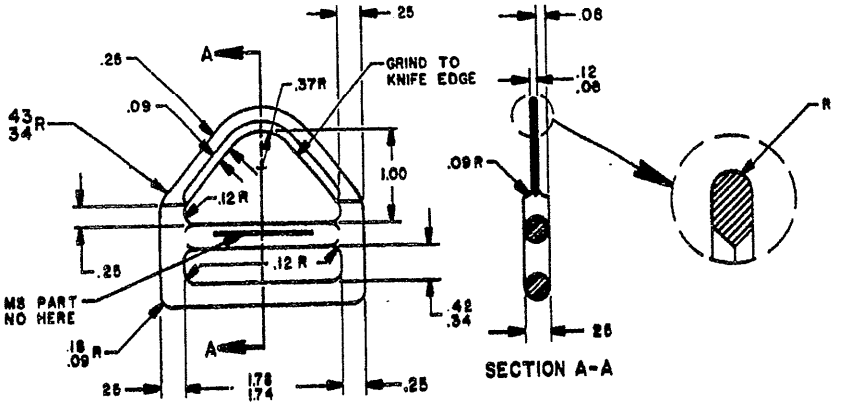

NOTES:

1. MATERIAL: STEEL, MIL-S-6049 OR MIL-S-6040.
2. METHOD OF FORMING: HOT FORGE.
3. SURFACE ROUGHNESS SHALL BE 125 MAX. IN ACCORDANCE WITH ANSI B46.1.
4. HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ. IN. TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875.
5. FINISH: PHOSPHATE COAT, MIL-P-16332, TYPE Z, CLASS 4B, FOLLOWED BY WAX EMULSION, MIL-W-3086.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED HEREIN, TOLERANCES ± .03.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 17 JUNE 70 REVISED (A) 9 AUG 74

(A) ENTIRE STANDARD REVISED

P.A. USAF - 82 Other Cust ARMY - GL NAVY - AS	TITLE KNIFE, RELEASE, CARGO PLATFORM	MILITARY STANDARD MS 27761
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AF DWG. 48A7313	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

USAF 82
ARMY AV
NAVY AS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Suggestions for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:50Z
Check the source to verify that this is the current version before use.