FED. SUP CLASS
4030

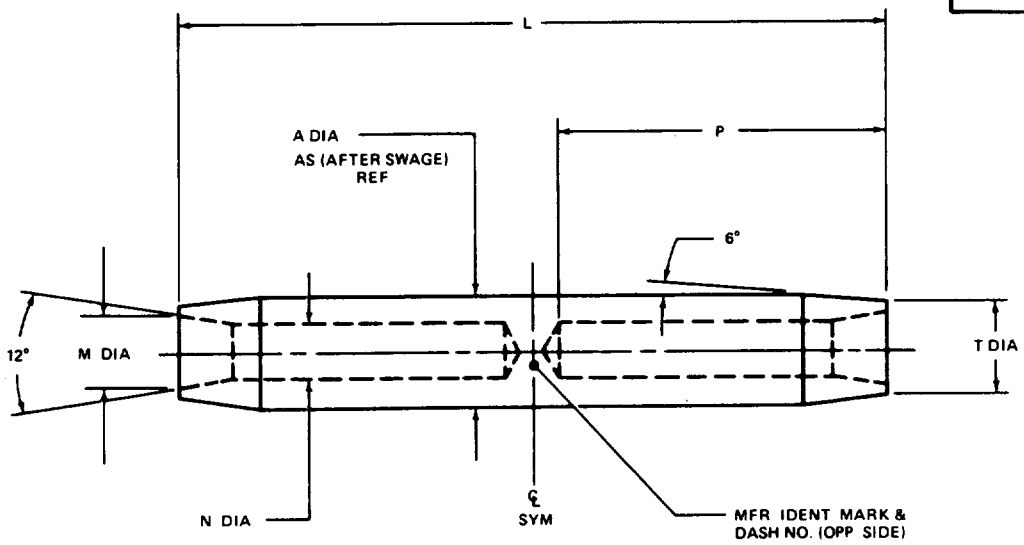

MS PART NO.	NOM CABLE DIA REF	MIN BREAKING STRENGTH LB	A DIA +.000 -.005	AS DIA REF +.000 -.005	L ±.005	M DIA +.010 -.000	N DIA +.005 -.000	T DIA +.000 -.010	P +.030 -.000
-2	1/16	480	.160	.138	1.125	.090	.078	.136	.468
-3	3/32	920	.218	.190	1.545	.119	.109	.190	.654
-4	1/8	2000	.250	.219	1.975	.154	.140	.219	.840
-5	5/32	2800	.297	.250	2.375	.188	.172	.250	1.032
-6	3/16	4200	.359	.313	2.749	.223	.203	.313	1.218
-7	7/32	5600	.427	.375	3.125	.257	.234	.375	1.404
-8	1/4	7000	.494	.438	3.475	.291	.265	.438	1.590
-9	9/32	8000	.563	.500	4.000	.326	.297	.500	1.852
-10	5/16	9800	.635	.563	4.562	.360	.328	.563	2.109

DIMENSIONS IN INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:
DECIMALS ± .010, ANGLES ± 3° SHANK AND CABLE HOLES SHALL BE CONCENTRIC
AND PARALLEL TO AXIS WITHIN .008
(.016 TOTAL INDICATOR READING)
MATERIAL: 303 se (SEE PROCUREMENT SPEC)
FINSIH: PASSIVATE (SEE PROCUREMENT SPEC)
SWAGED DIMENSIONS SHOWN ARE APPLICABLE WHEN MIL-W-83420
CABLE IS USED. WHEN MIL-C-18375 CABLE IS USED, SEE TABLE V OF THAT SPECIFI-
CATION FOR RECOMMENDED SWAGING DIMENSIONS.

(A) **INACTIVE FOR NEW DESIGN. USE RESTRICTED TO BATTLE DAMAGE REPAIRS. DO NOT USE WHERE IT WILL PASS PULLEYS OR THRU FAIRLEADS.**

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 5 APR 1972 REVISED (A) 23 JAN 85

User activities:
DSA IS

Review activities: USAF 11

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF 82 Other Cust NAVY - AS ARMY - CE	TITLE TERMINAL, WIRE ROPE, SPLICE	MILITARY STANDARD MS27768
PROCUREMENT SPECIFICATION MIL-T-781	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.