FED. SUP CLASS
5905

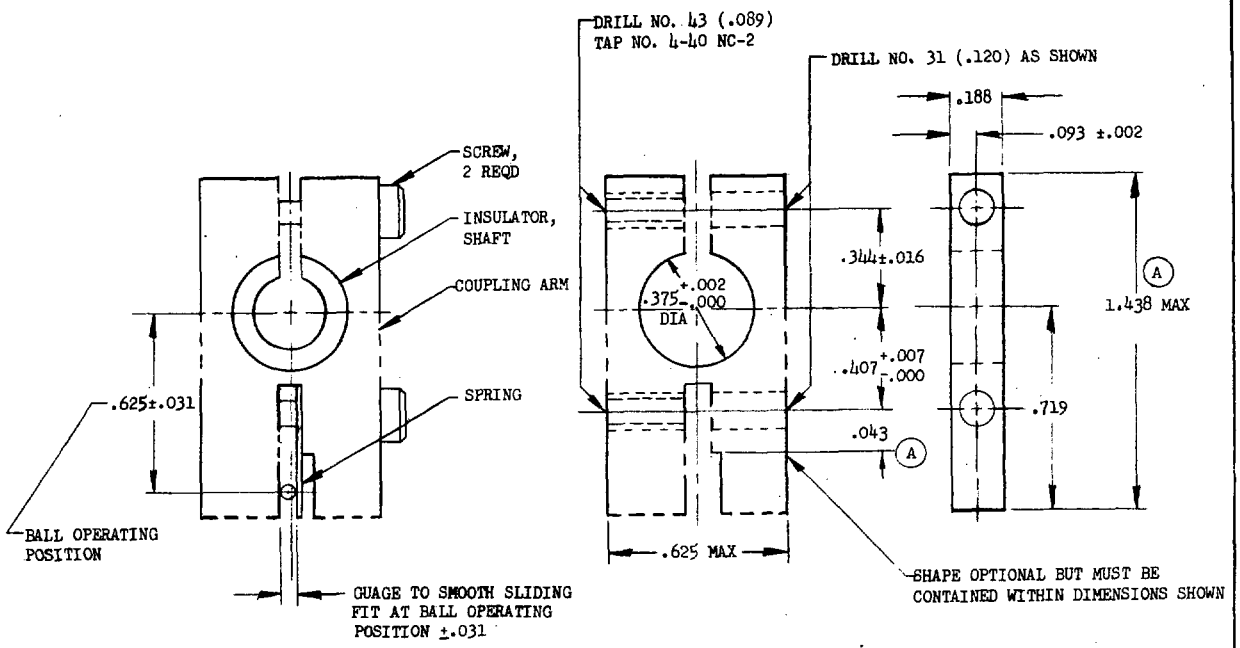

ASSEMBLY

COUPLING ARM

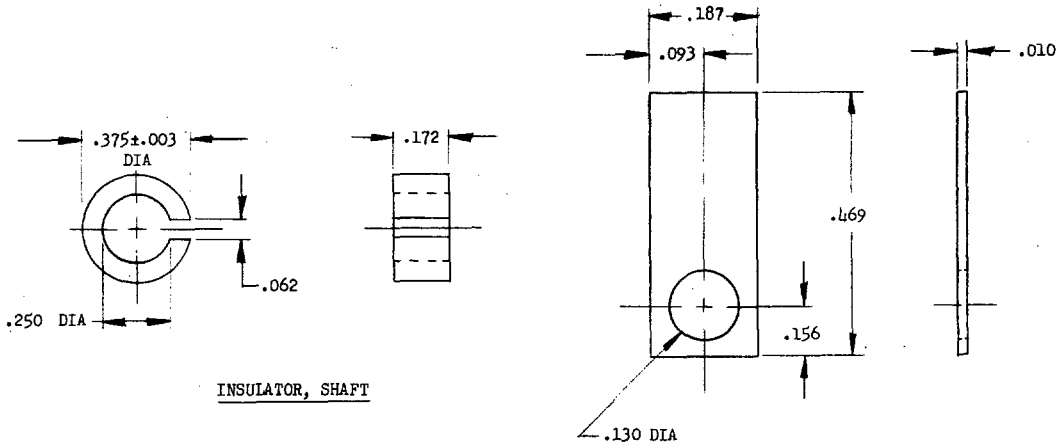

INSULATOR, SHAFT

SPRING

DASH NO
-1

MATERIAL: COUPLING ARM: YELLOW BRASS, SAE 70, GRADE C.
INSULATOR, SHAFT: OPTIONAL.
SPRING: PHOSPHOR BRONZE, SAE 77, TYPE A, SPRING TEMPER.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - WP (A) Other Cust USAF - 85	TITLE COUPLING, INSULATED, BUSHING SHAFT, FOR MIL-R-8903 RESISTOR	MILITARY STANDARD MS28928(ASG)
PROCUREMENT SPECIFICATION MIL-R-8903 (A)	SUPERSEDES:	SHEET 1 OF 1

APPROVED 15 May 62 REVISED (A) 14 Feb 66

Review activities: Navy - WP USAF - 85

This standard has been approved by the BuWep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.