FSC SUP CLASS
2810

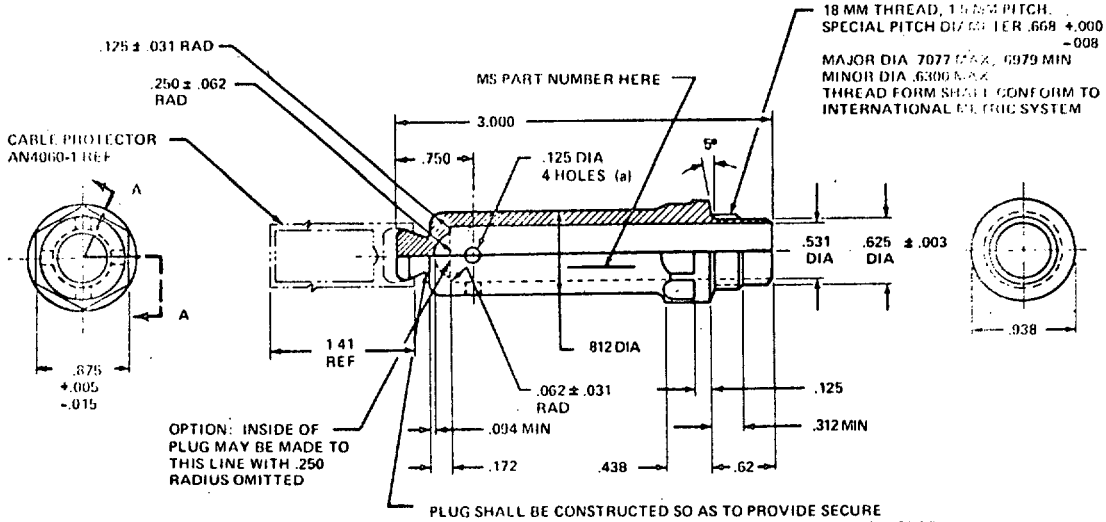

MS PART NO.	
MS29509-1	VENTED
MS29509-3	UN-VENTED

NOTES:

(a) .125 DIA HOLES IN VENTED PLUG ONLY.

1. SEATING TORQUE SHALL BE 25 LB IN. MAXIMUM.
2. PROOF TORQUE SHALL BE 40 LB IN. MINIMUM.
3. WEIGHT: .04 LB, ESTIMATED.
4. MATERIAL: PLASTIC, MOLDED, SPECIFICATION L-P-349, TYPE I, CLASS H2. COLOR OPTIONAL.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .020, ANGLES ± 1/2°
6. FOR USE ON ENGINES IN METAL CONTAINERS.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(8) ENTIRE STANDARD REVISED

APPROVED 18 APR 51 REVISED (A) 19 June 51 (B) 20 Dec 71

User activities: ARMY-AT

Review activities: USAF-82 ARMY-AV NAVY-AS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-82 Other Cust ARMY-AV NAVY-AS	TITLE PLUG-SHIPPING, SPARK PLUG PORT (18MM), AIRCRAFT ENGINE	MILITARY STANDARD MS29509
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: USAF DWG 5089162	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:01Z
Check the source to verify that this is the current version before use.