
FED. SUP CLASS
1560

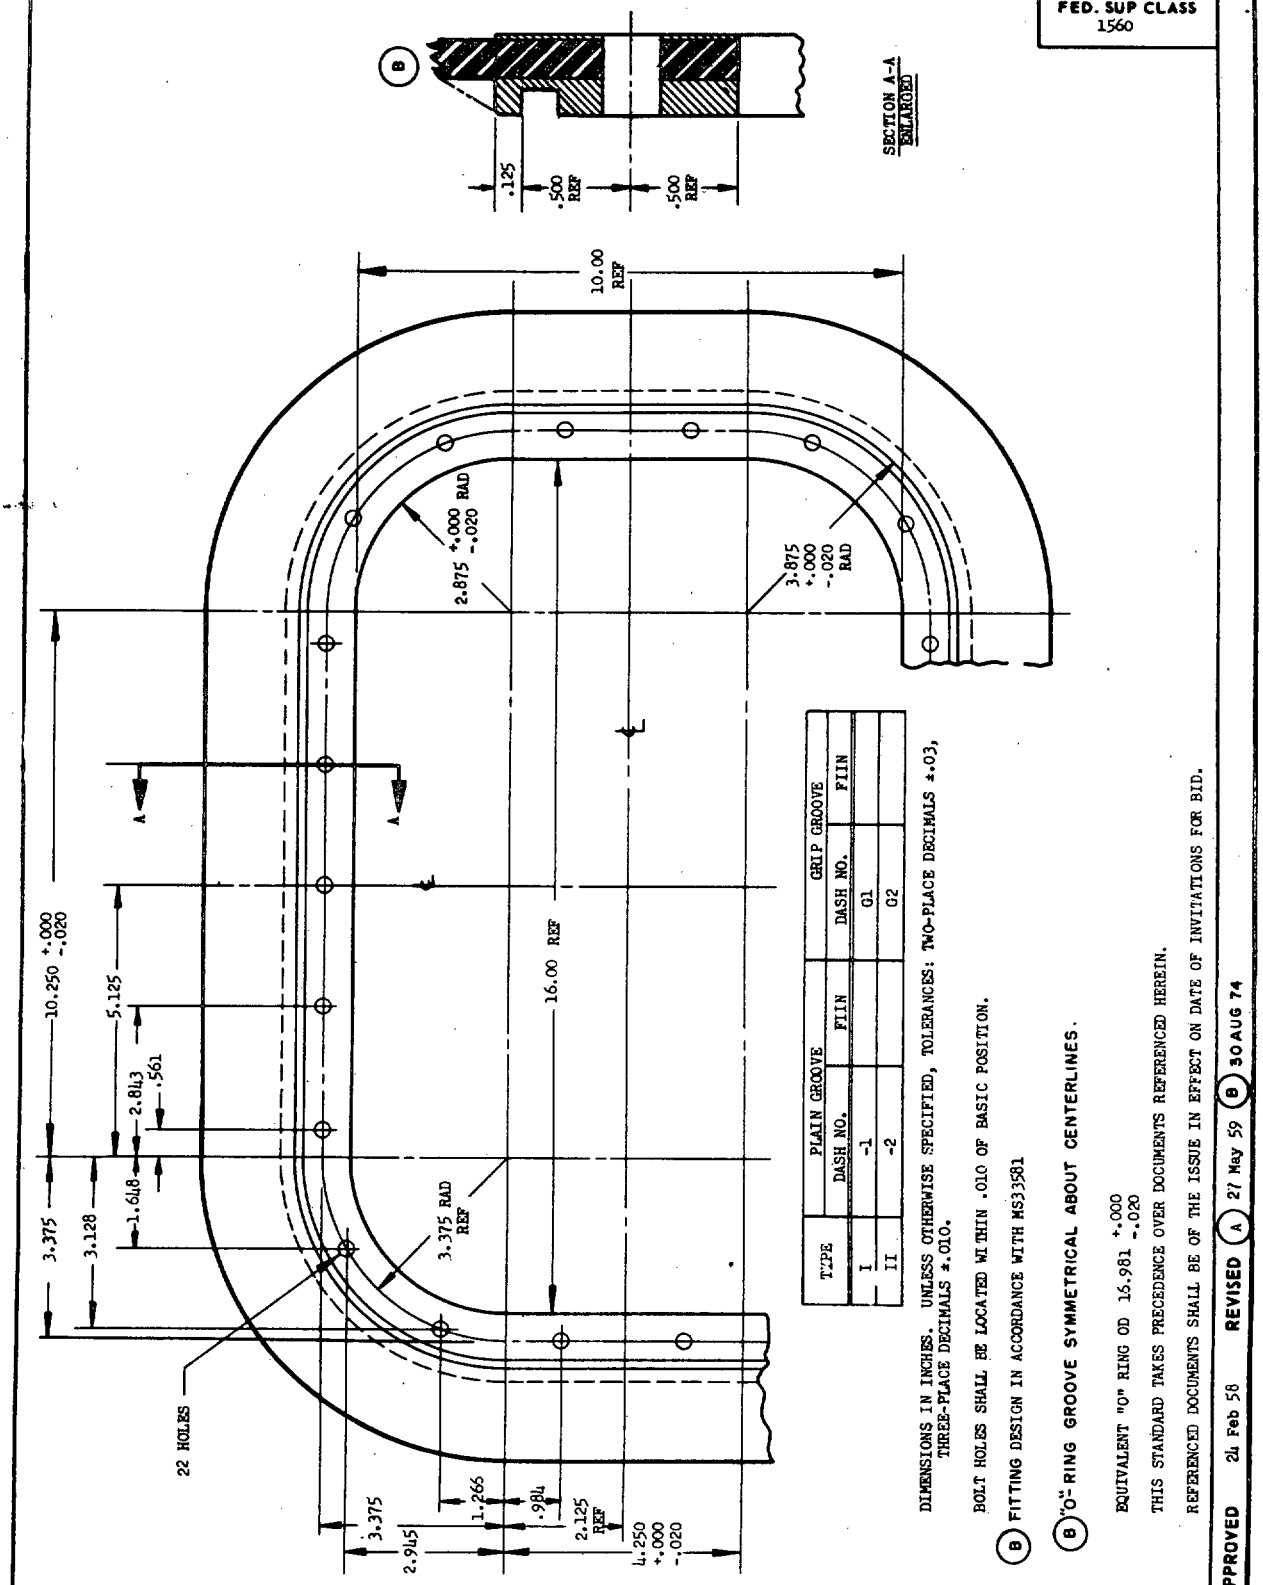

TYPE	PLAIN GROOVE DASH NO.	PLAIN GROOVE FIIN	GRIP GROOVE DASH NO.	GRIP GROOVE FIIN
I	-1		G1	
II	-2		G2	

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010.

BOLT HOLES SHALL BE LOCATED WITHIN .010 OF BASIC POSITION.

(B) FITTING DESIGN IN ACCORDANCE WITH MS33581

(B) "O"-RING GROOVE SYMMETRICAL ABOUT CENTERLINES.

EQUIVALENT "O" RING OD 16.981 +.000 -.020

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 24 Feb 58 REVISED (A) 27 May 59 (B) 30 AUG 74

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER:
AIR FORCE - 80,82

P.A. AIR FORCE - 11
Other Cust
Army -
Navy - AS

PROCUREMENT SPECIFICATION
MIL-F-6396

TITLE

(B) FITTING, ATTACHMENT, MOLDED TANK, THRU HOLE, FLUSH, "O" RING, RECTANGULAR, 10 x 16

SUPERSEDES:

MILITARY STANDARD

MS29562

SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.