This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:

USER SYMBOLS:

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978—703-122/941

Source: https://assist.dla.mil -- Downloaded: 2026/10-23T17:05Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (Coordinated) — Prev. Ed. of this form are obsolete. — Proj. No. 1510-0023 — PLATE NO. 15520

PROCUREMENT SPECIFICATION: NONE

P.A. AIR FORCE - 11

Other Cust: ARMY - AV

SUPERSEDES:

TITLE: DIMENSIONS, BASIC, COCKPIT, WHEEL CONTROLLED, FIXED WING AIRCRAFT

MILITARY STANDARD

MS33576

SHEET 1 OF 1

1. ALL MEASUREMENTS ARE BASED UPON THE SEAT REFERENCE POINT AT THE CENTERLINE OF THE SEAT IN THE NEUTRAL POSITION.
2. REFERENCE SPECIFICATION MIL-B-8584 FOR BRAKE PEDAL ANGLES AND DIMENSIONS.
3. THE WHEEL AND THROTTLE REFERENCE POINT IS DEFINED AS THE POINT AT WHICH THE PILOT'S SECOND FINGER IS IN CONTACT WITH THE FORWARD FACE OF THE CONTROL.
4. RUDDER PEDAL ADJUSTMENT SHALL BE IN INCREMENTS OF 1 INCH OR LESS.
5. BECAUSE OF CATAPULT GRIP REQUIREMENT, MAX. FORWARD THROTTLE MOVEMENT FOR AIRCRAFT EQUIPPED FOR CATAPULTING SHALL BE 20 INCHES FROM NEUTRAL SEAT REFERENCE POINT. MAX. FORWARD THROTTLE MOVEMENT FOR NONCATAPULT AIRCRAFT SHALL CORRESPOND TO THAT OF STICK.
6. THIS STANDARD IS TO BE USED FOR WHEEL CONTROLLED COCKPITS.
7. DIMENSIONS IN INCHES.

THIS IS A DESIGN STANDARD, NOT USED AS A PART NUMBER.

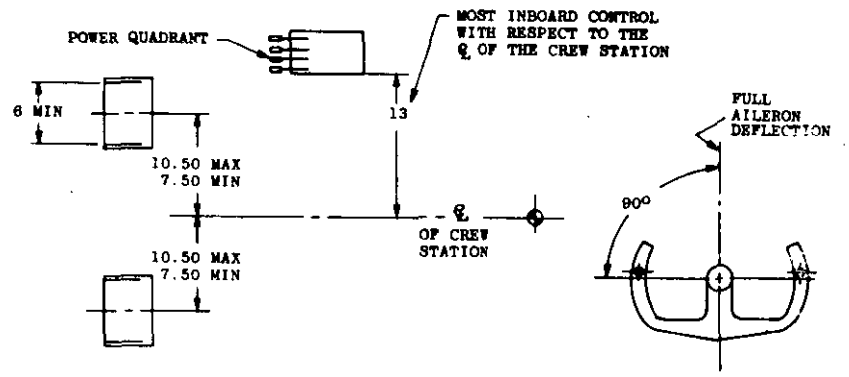

Ⓑ CANCELED AFTER 27 JANUARY 1978.
USE MIL-STD-1333 FOR ARMY AND NAVY, AND DESIGN HANDBOOK DH2-2 FOR AIR FORCE.

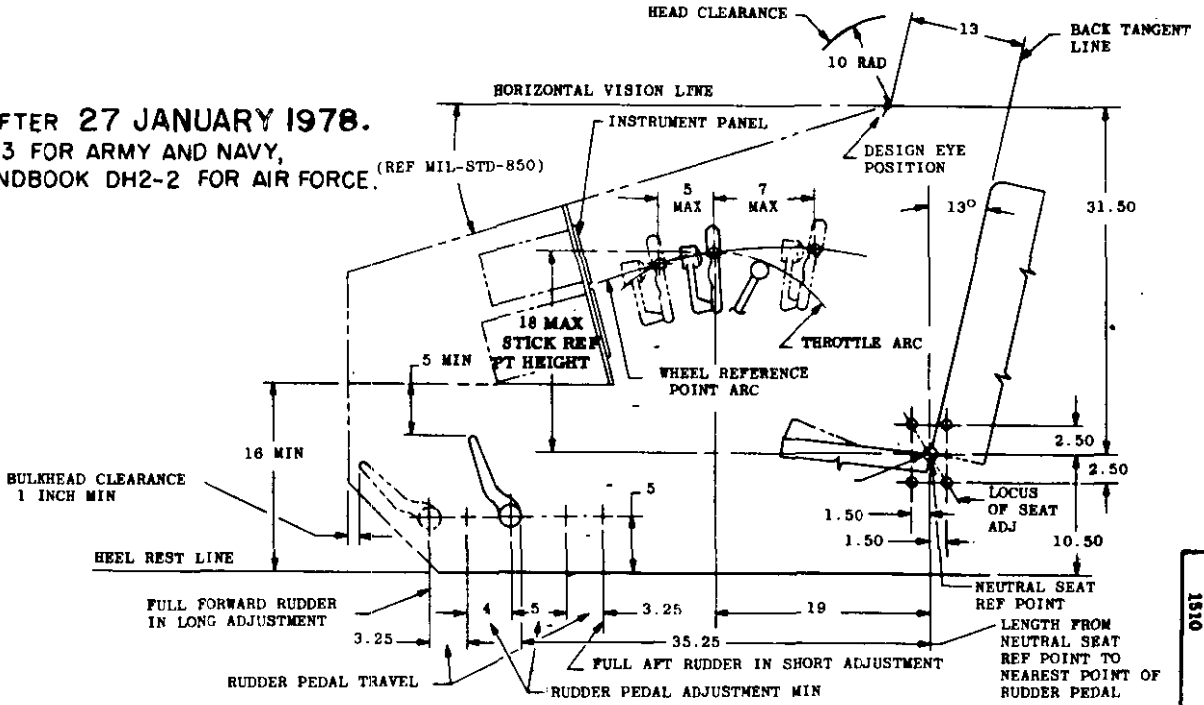

FED. SUP CLASS 1510

APPROVED 27 AUG 56 — REVISED - Ⓐ 2 JUN 69 Ⓑ 27 Jan 78