
User activities:
ARMY - EA

Review activities:
ARMY - AR
USAF - 11
DLA - 15

FED. SUP CLASS
5340

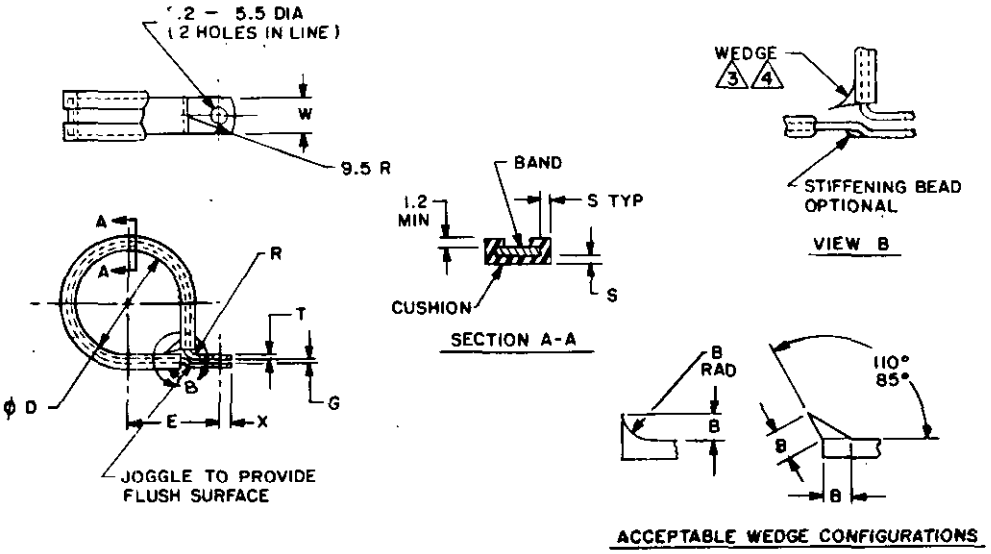

ACCEPTABLE WEDGE CONFIGURATIONS

TABLE I. DIMENSIONS.

DASH NO.	Ⓐ NOM TUBE SIZE ØD	DIMENSIONS									
		B ±0.8 3 4	E ±0.4	G	R +1.0 0	S +0.4 0	T		W ±1.5		X ±0.4
							ALUM	STEEL & CRES	ALUM	STEEL & CRES	
003	3.2	1.2	11.8	1.6 +0.4 0	1.6	1.2	0.8 ±0.08	0.8 ±0.08	12.7	9.5	4.8
004	4		12.2								
005	5	2.0	12.8								
006	6		13.3								
008	8		14.3								
010	10		15.3								
012	12	3.2	16.3		2.5		1.3 ±0.13			12.7	5.5
014	14		18.6								
016	16		19.6								
018	18	4.8	20.6								
020	20		21.6								
022	22		22.6								
025	25		24.1								
028	28		25.6								
032	32		28.5	2.5 +0.8 0	3.0	1.6	1.6 ±0.15	1.0 ±0.10			
036	36		30.5								
038	38		31.5								
040	40		32.5								
045	45		35.0	3.0 +0.8 0							
050	50		37.5								
056	56		41.5								
060	60		43.5								
063	63		44.5								
070	70		49.0								
080	80		56.0								
090	90		59.0								
100	100		64.0								

Ⓐ DENOTES CHANGES

METRIC

APPROVED 10 DEC 82 REVISED Ⓐ 13 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AS / Other Cust. AV / 99	International interest	TITLE: CLAMP, LOOP TYPE, CUSHIONED SUPPORT, METRIC	MILITARY STANDARD DS 14241
PROCUREMENT SPECIFICATION MIL-C-8603	SUPERSEDES:		PAGE 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL:

   a) BAND - THE BAND SHALL BE FABRICATED FROM ALUMINUM ALLOY, OR CORROSION RESISTANT STEEL IN ACCORDANCE WITH THE PROCUREMENT DOCUMENT.

   b) CUSHION - THE CUSHION SHALL BE FABRICATED FROM ETHYLENE PROPYLENE, NITRILE, CHLOROPRENE, SILICONE OR FLUOROSILICONE IN ACCORDANCE WITH THE PROCUREMENT DOCUMENT.

2. FINISH: ALUMINUM ALLOY SHALL BE FINISHED BY CHEMICAL CONVERSION PROCESS, AND CORROSION RESISTANT STEEL SHALL BE PASSIVATED IN ACCORDANCE WITH THE PROCUREMENT DOCUMENT.

3. THE WEDGE SHALL BE INTEGRALLY MOLDED TO CUSHION OR VULCANIZED USING PRESSURE AND HEAT TO ACCOMPLISH A BOND BETWEEN CUSHION AND WEDGE.

4. THE WEDGE SHALL OVERLAP AND TOUCH THE OPPOSITE END OF THE CUSHION WHEN CLAMP MOUNTING HOLES ARE ALIGNED AND THE CLAMP IS COMPLETELY CLOSED.

5. COLOR OF CUSHION - THE IDENTIFYING COLOR OF THE VARIOUS CUSHION MATERIALS SHALL BE AS FOLLOWS:

   a) ETHYLENE PROPYLENE - SOLID PURPLE

   b) NITRILE - SOLID YELLOW

   c) CHLOROPRENE - BLACK WITH BLUE IDENTIFIER (SEE PROCUREMENT SPECIFICATION).

   d) SILICONE - NATURAL WHITE

   e) FLUOROSILICONE - SOLID BLUE

CUSHION SELECTION GUIDE

   a) ETHYLENE PROPYLENE - RECOMMENDED FOR USE IN AREAS CONTAMINATED WITH PHOSPHATE ESTER HYDRAULIC FLUID AND OTHER SYNTHETIC FLUIDS. EXCELLENT OZONE RESISTANCE. NOT RESISTANT TO PETROLEUM BASED FLUIDS.


   b) NITRILE - RECOMMENDED FOR USE PRIMARILY IN FUEL IMMERSION AND FUEL VAPORS. GOOD OZONE RESISTANCE. NOT RESISTANT TO PHOSPHATE ESTER BASED FLUIDS. NOT FOR USE ON TITANIUM TUBING.

   c) CHLOROPRENE - RECOMMENDED FOR GENERAL PURPOSE USE IN AREAS CONTAMINATED WITH PETROLEUM BASED HYDRAULIC FLUIDS AND OCCASIONAL FUEL SPLASH. EXCELLENT OZONE RESISTANCE. NOT RESISTANT TO PHOSPHATE ESTER BASED FLUIDS. NOT FOR USE ON TITANIUM TUBING.

   d) SILICONE - RECOMMENDED FOR USE AT ELEVATED TEMPERATURE IN PHOSPHATE ESTER BASED FLUID AND OTHER SYNTHETIC FLUID CONTAMINATED AREAS. UNAFFECTED BY OZONE. NOT RESISTANT TO PETROLEUM BASED FLUIDS.

   e) FLUOROSILICONE - RECOMMENDED FOR USE AT ELEVATED TEMPERATURE IN PETROLEUM BASED FLUID CONTAMINATED AREAS. UNAFFECTED BY OZONE. NOT RESISTANT TO PHOSPHATE ESTER BASED FLUIDS.

6. EXAMPLE OF PART NUMBERS:



APPROVED 10 DEC 82 REVISED (A) SEE SHEET 1 AND 3 13 June 1983

User activities: ARMY - EA

Review activities: ARMY - AR, USAF - 11, DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AS / Other Cust. AV 99	International interest	TITLE: CLAMP, LOOP TYPE, CUSHIONED SUPPORT, METRIC	MILITARY STANDARD DS14241
PROCUREMENT SPECIFICATION MIL-C-8603		SUPERSEDES:	PAGE 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:37Z
Check the source to verify that this is the current version before use.

User activities:
ARMY - EA

Review activities:
ARMY - AR
USAF - 11
DLA - 15

FED. SUP CLASS
5340

NOTES:

1. DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE ±0.4 mm.
2. CLAMPS SHALL CHECK TO DIMENSIONS STATED IN TABLE I WITH ENDS HELD IN POSITION SHOWN.
3. THE WEDGE IS MANDATORY FOR DASH NUMBERS 003 THRU 070 CLAMP SIZES.
4. THE WEDGE IS PROHIBITED FOR DASH NUMBERS 080 THRU 100 CLAMP SIZES.
5. THESE CLAMPS ARE INTENDED FOR GENERAL PURPOSE CLAMPING APPLICATIONS INCLUDING ELECTRICAL WIRE BUNDLE CLAMPING. FOR HIGH PERFORMANCE LOOP STYLE CLAMPS FOR USE IN MIL-H-5440 HYDRAULIC SYSTEMS SEE MIL-C-85052.
6. MATERIAL CODES:

   THE FOLLOWING LETTER(S) INDICATE THE BAND AND CUSHION MATERIALS. DO NOT SPECIFY BAND/CUSHION COMBINATIONS NOT LISTED. MAXIMUM RECOMMENDED TEMPERATURES ARE INDICATED IN PARENTHESIS.

   DE - ALUMINUM BAND WITH ETHYLENE PROPYLENE CUSHION (100°C)

   DF - ALUMINUM BAND WITH NITRILE CUSHION (100°C)

   DG - ALUMINUM BAND WITH CLOROPRENE CUSHION (100°C)

   CE - CORROSION RESISTANT STEEL BAND WITH ETHYLENE PROPYLENE CUSHION (134°C)

   CF - CORROSION RESISTANT STEEL BAND WITH NITRILE CUSHION (100°C)

   CH - CORROSION RESISTANT STEEL BAND WITH SILICONE CUSHION (204°C)

   CG - CORROSION RESISTANT STEEL BAND WITH CHLOROPRENE CUSHION (100°C)

   CJ - CORROSION RESISTANT STEEL BAND WITH FLUOROSILICONE CUSHION (232°C)

7. REMOVE ALL BURRS AND SHARP EDGES.
8. (A) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 10 DEC 82 REVISED (A) SEE SHEET 1 AND 3 13 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. / Other Cust.	International interest	TITLE	MILITARY STANDARD
P.A. AS, Other Cust. AV, 99		CLAMP, LOOP TYPE, CUSHIONED SUPPORT, METRIC	DS14241
PROCUREMENT SPECIFICATION MIL-C-6603		SUPERSEDES:	PAGE 3 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1544

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 – 605-034/3598

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:37Z
Check the source to verify that this is the current version before use.