
FED. SUP CLASS
2805



STAMP ARROW AS SHOWN ON PISTON HEAD .002-.010 DEEP, .4 LONG AND .3 FROM EDGE IN DIRECTION OF CRANKSHAFT ROTATION (SIDE OPPOSITE OFFSET PIN)

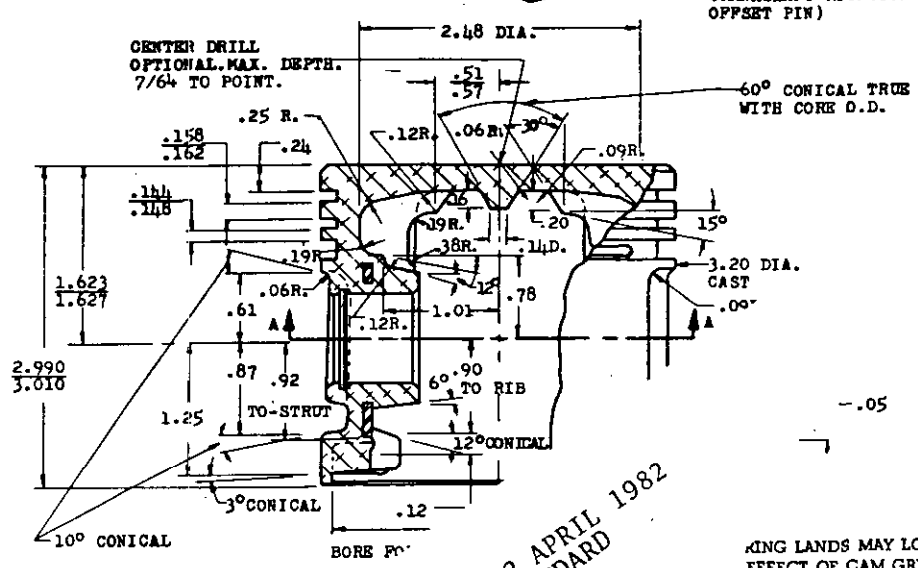


-.05

KING LANDS MAY LOCALLY SHOW EFFECT OF CAM GRINDING SKIRT.

PISTON PIN RETAINING RING GROOVES TO HAVE SHARP CORNERS.

(D) CANCELED AFTER 22 APRIL 1982 NO SUPERSEDING STANDARD

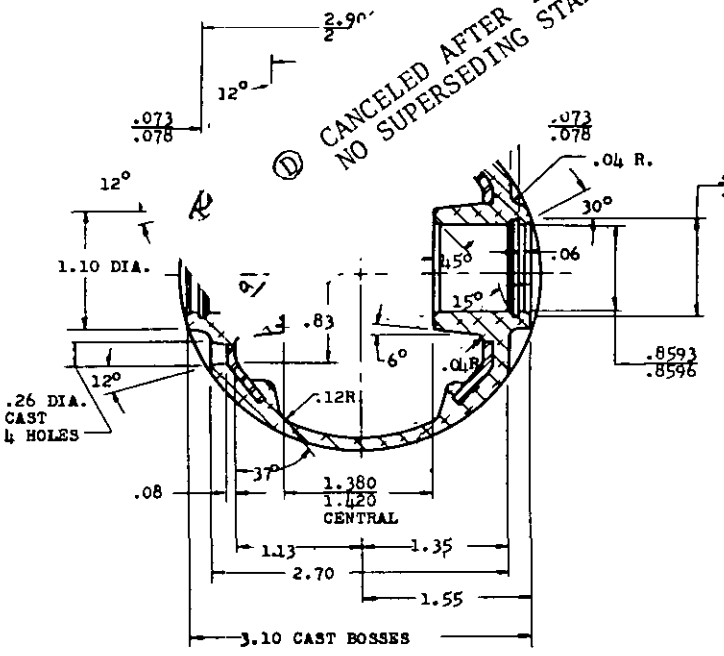

SECTION A-A

FINISHED PIN BORE TO BE FREE OF TIN PLATING.

PIN HOLE MUST BE SQUARE WITH SKIRT AXIS WITHIN .0005 INCH PER INCH OF SKIRT LENGTH

SERVICE PISTONS TO BE FURNISHED WITH PIN FITTED .0001/.0003 LOOSE WITH PIN RETAINERS.

WT. OF FIN. PISTON: 393 ± 3 GRAMS.

APPROVED 19 JUNE 1952 REVISED (A) 27 NOVEMBER 1953 (B) 24 OCTOBER 1955 (C) 7 MAR 1966 (D) 22 APRIL 1982

REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(C) ENTIRE STANDARD REVISED

PART NO. MS 13959-1

P.A. ARMY MO(ENDL) Other Cust A.F. - 69 NAVY - YD	TITLE: PISTON, INTERNAL COMBUSTION ENGINE: 3-1/4" X 3"	MILITARY STANDARD MS 13959
PROCUREMENT SPECIFICATION MIL-E-11275	SUPERSEDES:	SHEET 1 OF 11

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:31Z
Check the source to verify that this is the current version before use.