
FED. SUP CLASS
5930

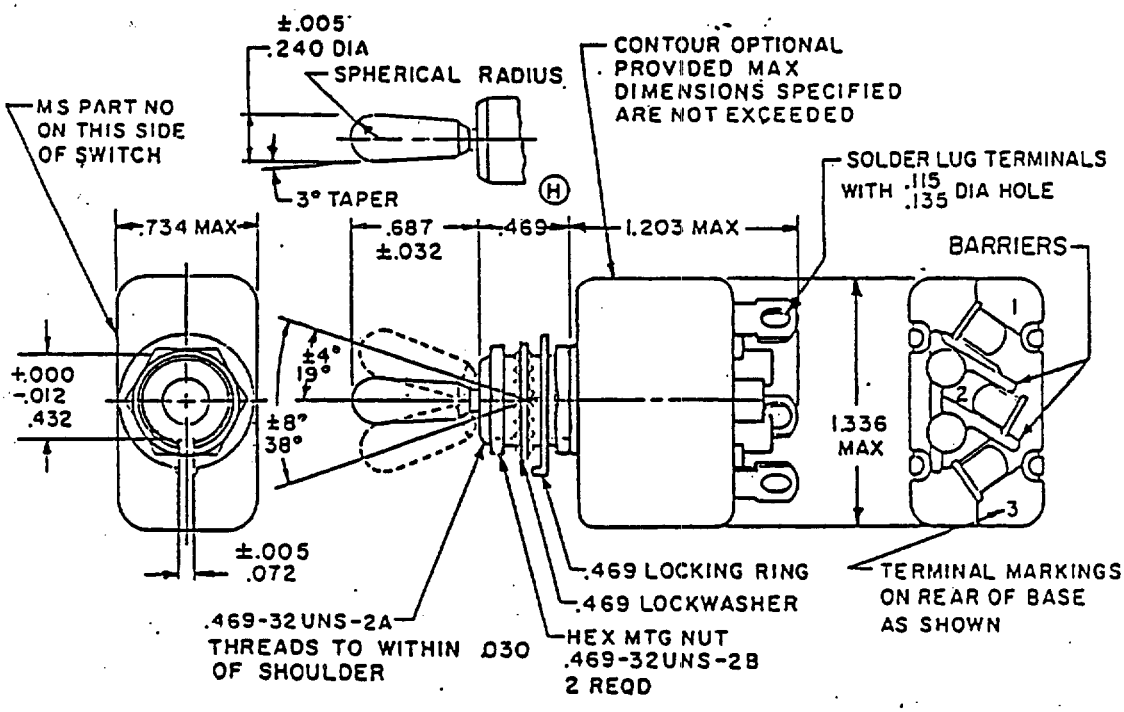

Ⓗ denotes changes

APPROVED 31 DEC 68 REVISED Ⓗ 30 SEP 1986

User activities: Army - Navy - Air Force -

Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A AF-85 Other Cust ARMY - ER NAVY - AS	International Interest	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES.	MILITARY STANDARD MS14001
Procurement Specification MIL-S-8834		SUPERSEDES: MS0014001 (USAF)	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) Previous editions of this form are obsolete. 5930-1331-01

AMSC N/A Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 11, 17, 99

User activities: Army -
Navy -
Air Force -

P.A
AF - 85
Other Cust
Army - ER
Navy - AS

Procurement Specification
MIL-S-8834

International Interest

TITLE
SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, SINGLE HOLE, .469 MOUNTING BUSHING, 25 AMPERES

SUPERSEDES:
MS90014001(USAF) 10-23T13:32Z

MILITARY STANDARD
MS14001

PAGE 2 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS 5930

DETAIL REQUIREMENTS

MS dash no	Circuit made between terminals as indicated with the toggle lever in these positions:			Current capacity amperes per pole 28 volts dc			Current capacity amperes per pole 115 volts 400 hertz ac			Current capacity amperes per pole 115 volts 60 hertz ac		
	Opposite keyway side	Center position	Keyway side	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit
212	on 2-3	off	on 1-2	7	25	15	7	25	15	7	20	15
222		none	off									
232			on 1-2									
242		off	none									
262		none	mom-on 1-2									
272	mom-on 2-3	off										
282	none											
292	on 2-3	none	mom-off									
302	off		mom-on 1-2									
312	on 2-3	off										

1/ Application information ratings at room temperature.

APPROVED 31 DEC 68 REVISED (H) FOR CHANGES SEE PAGE 3

Source: https://assist.dla.mil MS90014001(USAF) 10-23T13:32Z
Check the source to verify that this is the current version before use.

DETAIL REQUIREMENTS

MS dash no	Current capacity amperes per pole 1/ 250 volts 60 hertz ac			Current capacity amperes per pole 1/ 125 volts dc			Current capacity amperes per pole 1/ 250 volts dc			Life low current level switching 30 mV
	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit	Lamp load circuit	Resistive circuit	Inductive circuit	
212										
~~222~~										
232										
242										10 mA
~~252~~										
(H) 272		10	7		750 mA			500 mA		
~~282~~										
292										
~~302~~										
312										

1/ Application information ratings at room temperature.

User activities: Army - Navy - Air Force -
Review activities: Army - AR, MI Navy - EC Air Force - 11, 17, 99
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 31 DEC 68 REVISED (H) FOR CHANGE SEE PAGE 1 & 3

P.A	International interest	TITLE	MILITARY STANDARD
AIR FORCE - 85 Other Cust ARMY-ER NAVY-AS		SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES.	MS14001
Procurement Specification: MIL-S-8834		SUPERSEDES: MS0014001(USAF)	PAGE 3 OF 4

Downloaded from http://assist.dla.mil -- Document created 2020-10-23T13:32Z
Check the source to verify that this is the current version before use.

INCHES	mm	INCHES	mm
.005	0.13	.432	10.97
.012	0.30	.469	11.91
.030	0.76	.687	17.45
.032	0.81	.734	18.64
.072	1.83	1.203	30.56
.240	6.10	1.336	33.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) on decimals and ±.5° on angles.
4. For hardware detail specifications see appendix of MIL-S-8834.
5. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
7. Configuration of switch case housing, terminals and barrier; design optional providing maximum dimensions specified are not exceeded.
8. Weight: .090 pound maximum (36.8 grams).
9. Altitude requirement: 80,000 feet.
10. 115 V ac 60 hertz electrical endurance tests are to be performed at room temperature and pressure.
11. Contact Bounce: Shall not exceed 3.5 milliseconds.

APPROVED 31 Dec 68 REVISED (H) FOR CHANGES SEE PAGE 1 AND 3

User activities: Army Navy Air Force

Reviewer activities: Army AR, MI Navy EC Air Force 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AF - 85 Other Cust Army - ER Navy - AS	International Interest	TITLE SWITCH, TOGGLE, POSITIVE BREAK, ENVIRONMENTALLY SEALED, SOLDER LUG, SINGLE POLE, .469 MOUNTING BUSHING, 25 AMPERES	MILITARY STANDARD MS14001
Procurement Specification MIL-S-8834		SUPERSEDES: MS0014001(USAF)	PAGE 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:32Z
Check the source to verify that this is the current version before use.