

FED. SUP CLASS
5935

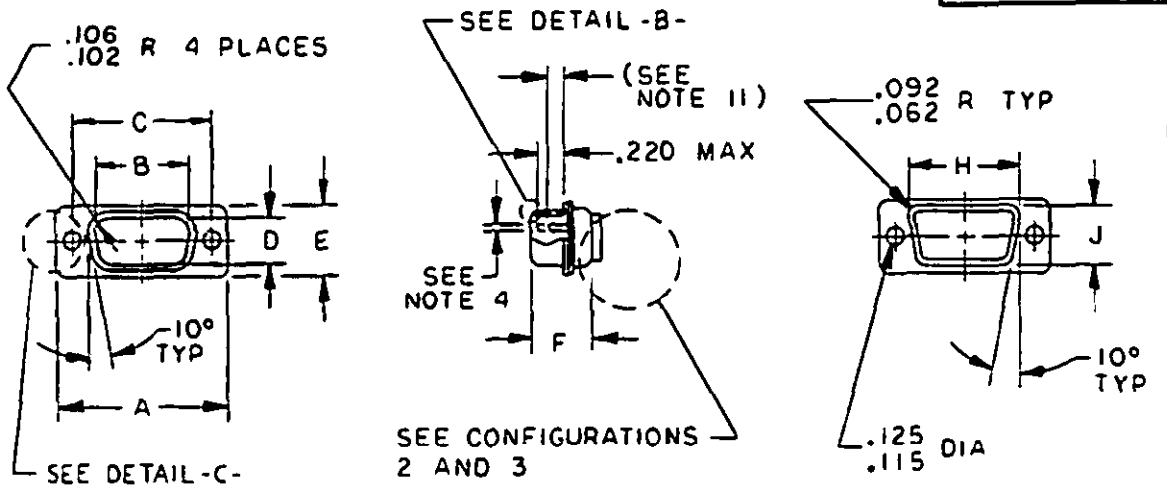


ENGAGING VIEW | CONFIGURATION 1 | TERMINAL VIEW

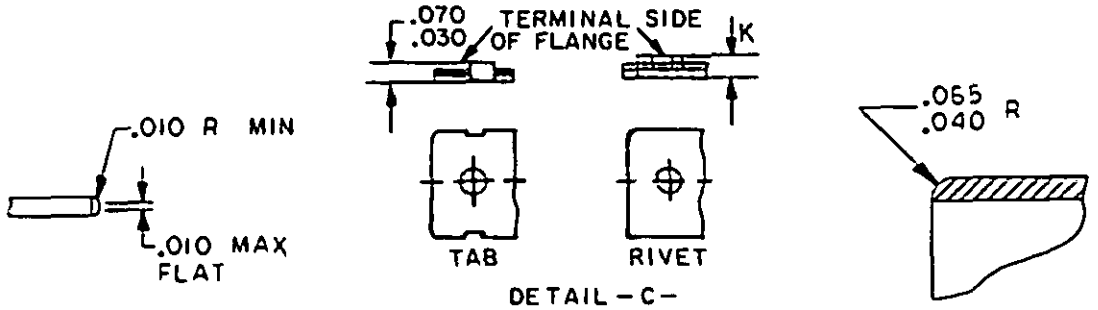

DETAIL -C-


DETAIL -A-

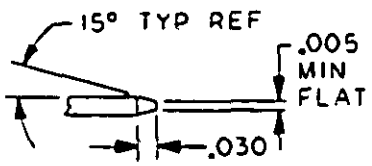

ALTERNATE METHODS
OF SECURING SHELL HALVES

DETAIL -B-

DETAIL -A-
(ALTERNATE)

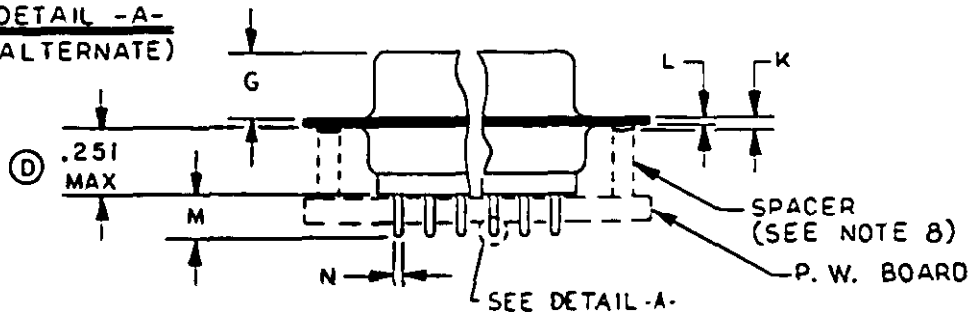

CONFIGURATION 2 - STRAIGHT TAILS

(D) DENOTES CHANGE

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 1 OF 6

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
AMSC N/A

5935-3608-02

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


APPROVED 13 JUN 73 REVISED (A) 12 OCT 73 (B) 13 NOV 78 (C) 5 DEC 83 (D) 26 JAN 89

User activities: Army - AT
Navy - MC, CG, SH
Air Force -


Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

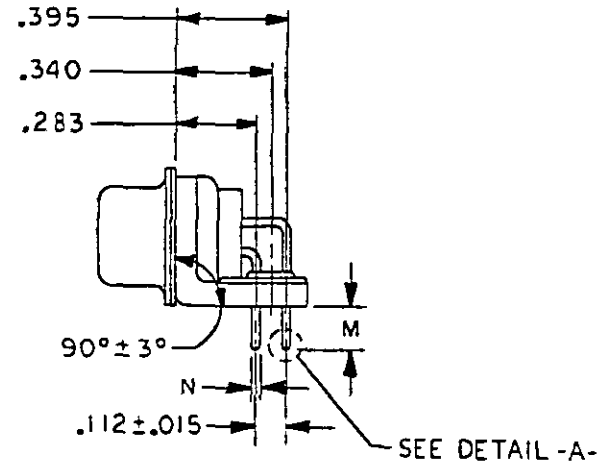

SHELL SIZE 1, 2, 3 AND 4

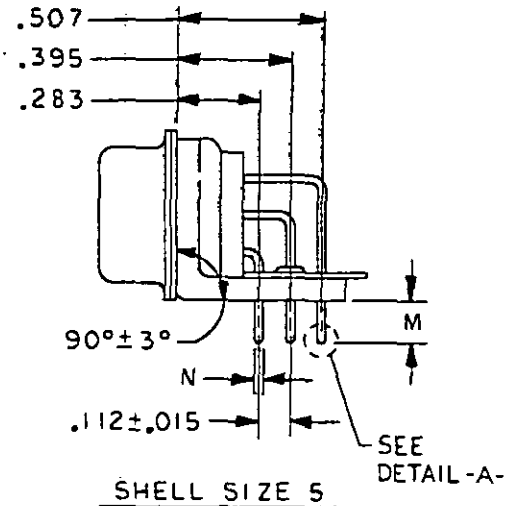

SHELL SIZE 5

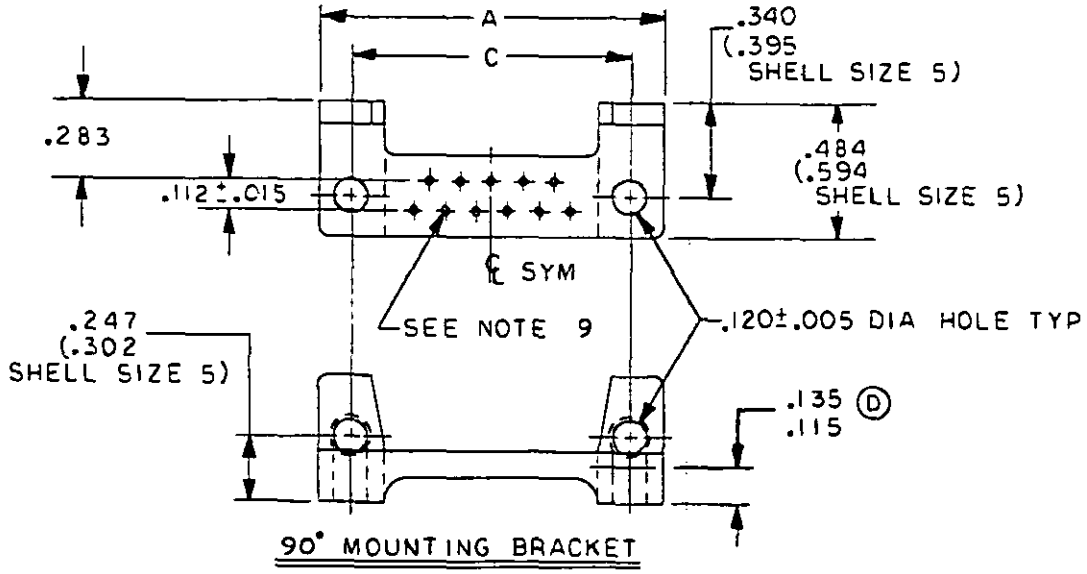

90° MOUNTING BRACKET



SHELL SIZE 1, 2, 3 AND 4 SHELL SIZE 5

ALTERNATE CONFIGURATION OF REAR INSERT & MOUNTING BRACKET

CONFIGURATION 3 - RIGHT ANGLE TAILS

REVISED Ⓓ FOR CHANGES SEE PAGES 1, 2, 3, AND 5

APPROVED 13 JUN 73

User activities: Army - AT
Navy - MC, CG, SH
Air Force -


Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 2 OF 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5935

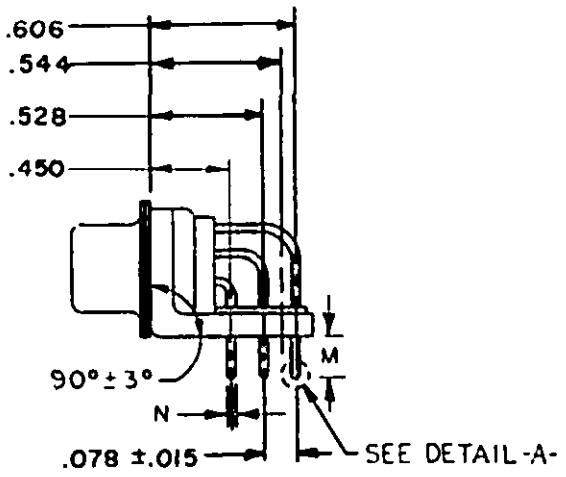

SHELL SIZE 1, 2, 3 AND 4

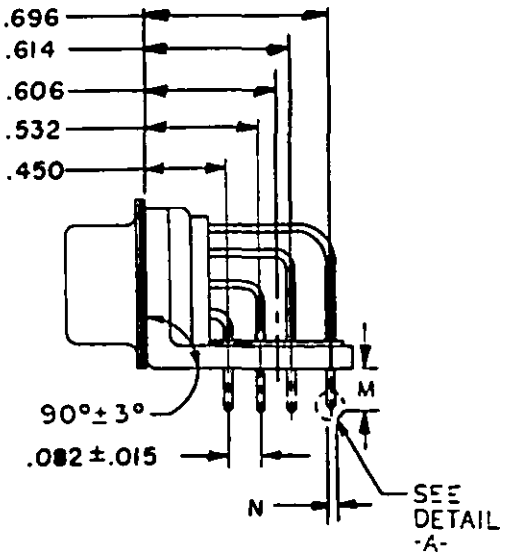

SHELL SIZE 5

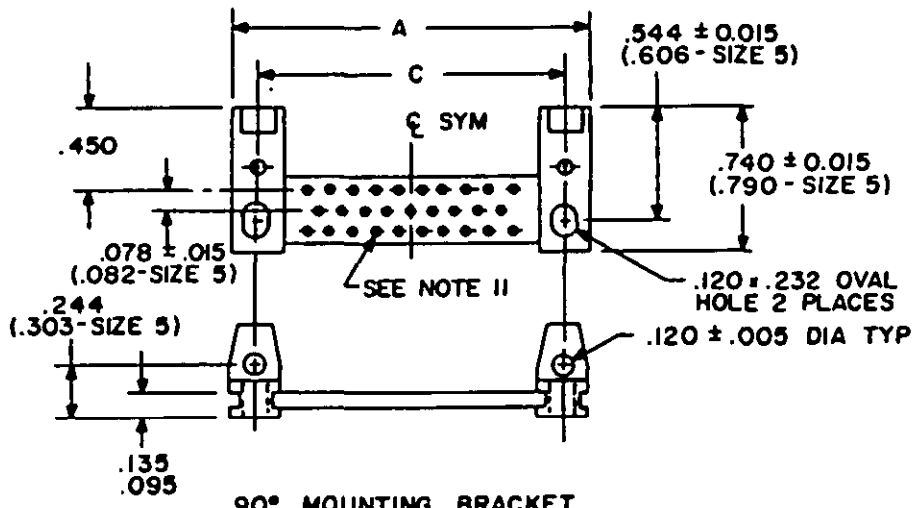

90° MOUNTING BRACKET

CONFIGURATION 4 - RIGHT ANGLE TAILS

APPROVED 13 JUN 73 REVISED (D) FOR CHANGES SEE PAGES 1, 2, 3, AND 5

User activities: Army - ME, Navy - MC, CG, SH, Air Force -

Review activities: Army - MI, Navy - AS, Air Force - 11, 99, DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 3 OF 6

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

User activities: Army - AT
Navy - MC, CG, SH
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P.A NAVY-EC
Other Cust
AF-85
ARMY-CR

Procurement Specification
MIL-C-24308

International Interest

SUPERSEDES:

TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES

MILITARY STANDARD

MS14059

PAGE 4 OF 6

FED. SUP CLASS 5935

TABLE I. Dimensions and configuration.

MS no. 14059	Tails	Shell size	A	B	C	D	E	F	G	H	J	K	L
-61, -67			1.228	.671	.989	.334	.509	.432	.238	.769	.432	.060	.040
-1, -7,	Straight		(31.19)	(17.04)	(25.12)	(8.48)	(12.93)	(10.97)	(6.05)	(19.53)	(10.97)	(1.52)	(1.02)
-13, -19,		1	1.198	.661	.979	.324	.479	.412	.229	.749	.412	.035	.020
-25, -31,			(30.43)	(16.79)	(24.87)	(8.23)	(12.17)	(10.46)	(5.82)	(19.02)	(10.46)	(0.89)	(0.51)
-37, -43,	Right												
-49, -55	angle												
-73													
-62, -68													
-2, -8	Straight		1.556	.999	1.317	.334	.509	.432	.238	1.093	.432	.060	.040
-14, -20,		2	(39.52)	(25.37)	(33.45)	(8.48)	(12.93)	(11.15)	(6.05)	(27.76)	(10.97)	(1.52)	(1.02)
-26, -32,			1.526	.989	1.307	.324	.479	.412	.299	1.073	.412	.035	.020
-38, -44,	Right		(38.76)	(25.12)	(33.20)	(8.23)	(12.17)	(10.46)	(5.82)	(27.25)	(10.46)	(0.89)	(0.51)
-50, -56	angle												
-74													
-63, -69													
-3, -9	Straight		2.103	1.539	1.857	.316	.509	.439	.248	1.635	.432	.070	.049
-15, -21			(53.42)	(39.09)	(47.17)	(8.48)	(12.93)	(11.07)	(5.99)	(41.53)	(10.97)	(1.78)	(1.24)
-75,		3	2.073	1.529	1.847	.324	.479	.416	.224	1.615	.412	.050	.029
-27, -33,			(52.65)	(38.84)	(46.91)	(8.23)	(12.17)	(10.57)	(5.69)	(41.02)	(10.46)	(1.27)	(0.74)
-39, -45,	Right												
-51, -57	angle												
-64, -70													
-4, -10	Straight		2.744	2.187	2.505	.334	.509	.436	.236	2.282	.432	.070	.049
-16, -22,		4	(69.70)	(55.55)	(63.63)	(8.48)	(12.93)	(11.07)	(5.99)	(57.96)	(10.97)	(1.52)	(1.02)
-28, -34			2.714	2.177	2.495	.324	.479	.416	.224	2.262	.412	.050	.029
-40, -46	Right		(68.94)	(55.30)	(63.37)	(8.23)	(12.17)	(10.57)	(5.69)	(57.45)	(10.46)	(1.27)	(0.74)
-52, -58	angle												
-76													
-65, -71													
-5, -11,	Straight		2.650	2.084	2.411	.446	.620	.436	.236	2.188	.544	.070	.049
-17, -23,		5	(67.31)	(52.93)	(61.24)	(11.33)	(15.75)	(11.07)	(5.99)	(55.58)	(13.82)	(1.78)	(1.24)
-29, -35,			2.620	2.074	2.401	.436	.590	.416	.224	2.168	.524	.050	.029
-41, -47	Right		(66.55)	(52.68)	(60.99)	(11.07)	(14.00)	(10.57)	(5.69)	(55.07)	(13.31)	(1.27)	(0.74)
-53, -59	angle												
-77													

Ⓓ

APPROVED 13 JUN 73

REVISED Ⓓ FOR CHANGES SEE PAGES 1, 2, 3, AND 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

TABLE II. Application data and dimensions.

MS no. 14059	Applicable configurations	Applicable board thickness	Nominal pin diameter	M	N
-1 thru -5	1 and 2	.094 (2.39 mm)	.030 (0.76 mm)	.185 (4.70 mm) .130 (3.30 mm)	.033 (0.84 mm) .027 (0.69 mm)
-7 thru -11	1 and 2	.125 (3.18 mm)	.030 (0.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.033 (0.84 mm) .027 (0.69 mm)
-13 thru -17	1 and 2	.094 (2.39 mm)	.040 (1.02 mm)	.185 (4.70 mm) .130 (3.30 mm)	.043 (1.09 mm) .037 (0.94 mm)
-19 thru -23	1 and 2	.125 (3.18 mm)	.030 (0.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.043 (1.09 mm) .037 (0.94 mm)
-25 thru -29	1 and 3	.062 (1.57 mm)	.030 (0.76 mm)	.154 (3.91 mm) .099 (2.51 mm)	.033 (0.84 mm) .027 (0.69 mm)
-31 thru -35	1 and 3	.094 (2.39 mm)	.030 (0.76 mm)	.185 (4.70 mm) .130 (3.30 mm)	.033 (0.84 mm) .027 (0.69 mm)
-37 thru -41	1 and 3	.062 (1.57 mm)	.040 (1.02 mm)	.154 (3.91 mm) .099 (2.51 mm)	.043 (1.09 mm) .037 (0.94 mm)
-43 thru -47	1 and 3	.094 (2.39 mm)	.040 (1.02 mm)	.185 (4.70 mm) .130 (3.30 mm)	.043 (1.09 mm) .037 (0.94 mm)
-49 thru -53	1 and 3	.125 (3.18 mm)	.030 (0.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.033 (0.84 mm) .027 (0.69 mm)
-55 thru -59	1 and 3	.125 (3.18 mm)	.040 (1.02 mm)	.210 (5.33 mm) .155 (3.94 mm)	.043 (1.09 mm) .037 (0.94 mm)
-61 thru -65	1 and 2	.094 (2.39 mm)	.020 (0.51 mm)	.185 (4.70 mm) .130 (3.30 mm)	.023 (0.58 mm) .017 (0.43 mm)
-67 thru -71	1 and 2	.125 (3.18 mm)	.020 (0.51 mm)	.320 (8.13 mm) .275 (6.99 mm)	.023 (0.58 mm) .017 (0.43 mm)
-73 thru -77	1 and 4	.062 (1.57 mm)	.020 (0.51 mm)	.154 (3.91 mm) .099 (2.51 mm)	.023 (0.58 mm) .017 (0.43 mm)

User activities: Army - AT
Navy - MC, CG, SH
Air Force

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 13 JUN 73
REVISED (D) FOR CHANGES SEE PAGES 1, 2, 3, AND 5

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 5 OF 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.104	2.64	.247	6.27
.010	0.25	.106	2.69	.251	6.38
.015	0.38	.112	2.84	.283	7.19
.030	0.76	.115	2.92	.302	7.67
.040	1.02	.120	3.05	.340	8.64
.062	1.57	.125	3.18	.395	10.03
.065	1.65	.135	3.43	.484	12.29
.070	1.78	.220	5.59	.507	12.88
.092	2.34			.594	15.09

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.
4. Pin diameter .041/.039 (1.04/0.99 mm) for arrangements MS18273-1, MS18274-1, MS18275-1, MS18276-1 and MS18277-1.
5. Copyright notice. All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the expressed permission of the copyright owner.
6. The 90° bracket shall be one piece flame resistant glass-filled nylon, polyester or two piece metal and nylon of which the metal pieces shall be coated with a material in accordance with MIL-I-46058.
7. The 90° brackets shall be furnished as an integral part of the connector assembly.
8. (D) Spacers will be supplied with connectors (not attached to the connector).
9. Layout shown for reference only to locate C_L of hole pattern. See applicable insert arrangement.
10. Requirement for contact retention shall be 3.5 lbs. for right angle printed circuit board mount connectors. Connectors may be fastened to board for test.
11. Dimensions are .150 (3.81 mm) minimum full pin diameter extension (sizes 3 through 6) and .159 (4.04 mm) minimum full pin diameter extension (sizes 1 and 2).
12. Unless otherwise specified, tolerance is ±.010 inch (0.25 mm).
13. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
14. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 13 JUN 73 REVISED (D) FOR CHANGES SEE PAGES 1, 2, 3, AND 5

User activities: Army - AT Navy - MC, CG, SH Air Force

Review activities: Army - MI Navy - AS Air Force DLA-ES 11, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 6 OF 6

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 - 604-033/12457

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.