
REVIEWER SYMBOLS: USAF - 99 NAVY - AS DLA - 15 ARMY - AR

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 3120

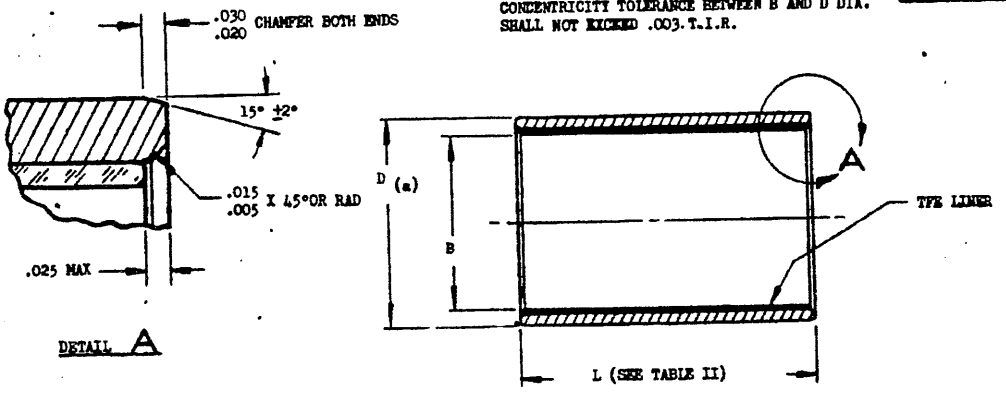

(D) INACTIVE FOR NEW DESIGN SUPERSEDED BY MIL-B-81934/1

TABLE I

DASH NO.	NOMINAL SIZE	B DIA +.0000 -.0010	D DIA (a)	WEIGHT LB/IN (REF) L = 1.000 AL	WEIGHT LB/IN (REF) L = 1.000 CRES
-04	1/4	.2515	.3760	.006	.017
-05	5/16	.3140	.4386	.008	.022
-06	3/8	.3765	.5012	.009	.025
-07	7/16	.4390	.5638	.010	.028
-08	1/2	.5015	.6265	.011	.031
-09	9/16	.5640	.6892	.013	.036
-10	5/8	.6265	.8142	.022	.061
-11	11/16	.6890	.8767	.023	.064
-12	3/4	.7515	.9393	.025	.070
-14	7/8	.8765	1.0645	.029	.080
-16	1	1.0015	1.1898	.033	.091
-18	1 1/8	1.1265	1.3148	.037	.101
-20	1 1/4	1.2515	1.4398	.040	.111
-22	1 3/8	1.3765	1.5648	.044	.122
-24	1 1/2	1.5015	1.7523	.065	.179
-26	1 5/8	1.6465	1.8773	.070	.192
-28	1 3/4	1.7515	2.0023	.075	.207
-32	2	2.0015	2.2523	.085	.234

(a) D TOLERANCE: ALUMINUM, ±.0005; CORROSION RESISTANT STEEL, +.0000, -.0005.

TABLE II (SEE SHEET 2)

DASH NO.	NOMINAL SIZE	LENGTH L +.000 -.010																												
		1/4	9/32	5/16	11/32	3/8	7/16	1/2	9/16	5/8	11/16	3/4	7/8	1	1 1/8	1 1/4	1 3/8	1 1/2	1 5/8	1 3/4	1 7/8	2	2 1/8	2 1/4	2 3/8	2 1/2	2 3/4	3
-04	1/4	08	09	10	11	12	14																						
-05	5/16	08	09	10	11	12	14	16	18																				
-06	3/8	08	09	10	11	12	14	16	18	20	22																		
-07	7/16	08	09	10	11	12	14	16	18	20	22	24	28																
-08	1/2	08	09	10	11	12	14	16	18	20	22	24	28																
-09	9/16	08	09	10	11	12	14	16	18	20	22	24	28	32	36														
-10	5/8	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44												
-11	11/16	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52										
-12	3/4	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52										
-14	7/8	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52										
-16	1	08	09	10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60								
-18	1 1/8			10	11	12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60								
-20	1 1/4					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68						
-22	1 3/8					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68						
-24	1 1/2					12	14	16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88		
-26	1 5/8							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96	
-28	1 3/4							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96	
-32	2							16	18	20	22	24	28	32	36	40	44	48	52	56	60	64	68	72	76	80	88	96	

APPROVED 10 Aug 1966 REVISED (A) 5 Dec 66 (B) 30 Apr 67 (C) 23 Mar 68 (D) 8 MAY 1980

P.A. Navy - AS
Other Cust
USAF - 11
ARMY - AV

TITLE
BEARING, SLEEVE, PLAIN, TFE LINED

MILITARY STANDARD
MS21240

PROCUREMENT SPECIFICATION MIL-B-8943

SUPERSEDES:

SHEET 1 OF 3

PROJECT NO. 3120-0517

DD FORM 672-1 (coordination)
ASO use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

TABLE III
INTERCHANGEABILITY (SEE STATUS NOTE)

LENGTH FROM TABLE II	COLUMN 1 REV. A. DATED 5 DEC 1966 (LENGTHS IN 1/16 INCREMENTS)	COLUMN 2 REV. B DATED 10 APR 1967 (LENGTHS IN 1/32 INCREMENTS)	COLUMN 3 REV. C (LENGTHS IN 1/32 INCREMENTS)
1/4	04	08	008
9/32	--	09	009
5/16	05	10	010
11/32	--	11	011
3/8	06	12	012
7/16	--	14	014
1/2	08	16	016
9/16	--	18	018
5/8	10	20	020
11/16	--	22	022
3/4	12	24	024
7/8	--	28	028
1	16	32	032
1 1/8	--	36	036
1 1/4	20	40	040
1 3/8	--	44	044
1 1/2	24	48	048
1 5/8	--	52	052
1 3/4	28	56	056
1 7/8	--	60	060
2	32	64	064
2 1/8	--	68	068
2 1/4	36	72	072
2 3/8	--	76	076
2 1/2	40	80	080
2 3/4	--	88	088
3	48	96	096

MATERIAL: CODE
BEARING: "A" = ALUMINUM ALLOY, QQ-A-200/11 or QQ-A-225/9
"C" = CORROSION RESISTANT STEEL, AMS 5643 (17-4PH), AISI 410 OR 416

LINER: SEE PROCUREMENT SPECIFICATION
HARDNESS: 17-4PH COND H-1150 AS PER MIL-H-6875
410, 416 R_c 27-32 AS PER MIL-H-6875

FINISH:
ALUMINUM TO BE ANODIZED PER MIL-A-8625

SURFACE FINISH:
SMOOTH MACHINE FINISH 63 MICRO-INCH RHR ON O.D. 125 MICRO-INCH RHR ON ALL OTHER SURFACES PER ASA B46.1 - 1962, UNLESS OTHERWISE SPECIFIED.

TEMPERATURE RANGE:
-65° F TO +250° F

BREAK SHARP EDGES AND CORNERS AND REMOVE ALL BURRS AND SLIVERS.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

EXAMPLE OF PART NUMBER:

MS21240 - 04 A 008 = 1/4 INCH BORE DIA ALUMINUM x 1/4 LONG

- 008 — LENGTH CODE IN MULTIPLES OF 1/32 INCH
- A — MATERIAL CODE
- 04 — BORE DIAMETER CODE IN MULTIPLES OF 1/16 INCH
- MS21240 — BASIC MS PART NUMBER

STATUS NOTE:
REVISION "A" AND REVISION "B" ARE CANCELLED AND SUPERSEDED BY REVISION "C" AFTER 28 MARCH 1969.

INTERCHANGEABILITY RELATIONSHIP:
USE ONLY ASSIGNED PART NUMBERS FOR LENGTH AS LISTED IN COLUMN 3 OF TABLE III.

LOAD RATINGS:
DYNAMIC CAPACITY 25,000 B x L LBS OR 25,000 B^2 LB WHICHEVER IS LESSER.
STATIC LIMIT LOAD 60,000 B x L LBS OR 60,000 B^2 LB WHICHEVER IS LESSER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 10 Aug 1966 REVISED (D) FOR CHANGES SEE SHEET 3

REVIEW SYMBOLS
USAF - 99
DLA - 15
ARMY - AR
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft directive should be based on the information in the current DoD152."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - AS	TITLE	MILITARY STANDARD
Other Cust USAF - 11 ARMY - AV	BEARING, SLEEVE, PLAIN, TFE LINED	MS21240
PROCUREMENT SPECIFICATION MIL-B-8943	SUPERSEDES:	SHEET 2 OF 3

DD FORM 672-1 (coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
AMD use only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3120

(D)

INTERCHANGEABILITY TABLE	
INACTIVE FOR NEW DESIGN	SUPERSEDED BY
MS21240 - 04A	MIL-B-81934/1 - 04A
- 05A	- 05A
- 06A	- 06A
- 07A	- 07A
- 08A	- 08A
- 09A	- 09A
- 10A	- 10A
- 11A	- 11A
- 12A	- 12A
- 14A	- 14A
- 16A	- 16A
- 18A	- 18A
- 20A	- 20A
- 22A	- 22A
- 24A	- 24A
- 26A	- 26A
- 28A	- 28A
MS21240 - 32A	MIL-B-81934/1 - 32A

(D)

INTERCHANGEABILITY TABLE	
INACTIVE FOR NEW DESIGN	SUPERSEDED BY
MS21240 - 04C	MIL-B-81934/1 - 04C
- 05C	- 05C
- 06C	- 06C
- 07C	- 07C
- 08C	- 08C
- 09C	- 09C
- 10C	- 10C
- 11C	- 11C
- 12C	- 12C
- 14C	- 14C
- 16C	- 16C
- 18C	- 18C
- 20C	- 20C
- 22C	- 22C
- 24C	- 24C
- 26C	- 26C
- 28C	- 28C
MS21240 - 32C	MIL-B-81934/1 - 32C

APPROVED 10 Aug 1966 REVISED (D) FOR CHANGES SEE SHEET 3

REVIEWER SYMBOLS: USER SYMBOLS:
USAF - 99
DLA - 15
ARMY - AR

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE BEARING, SLEEVE, PLAIN TFE LINED	MILITARY STANDARD MS21240
PROCUREMENT SPECIFICATION MIL-B-8943	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23005

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.