
FED. SUP CLASS
5925

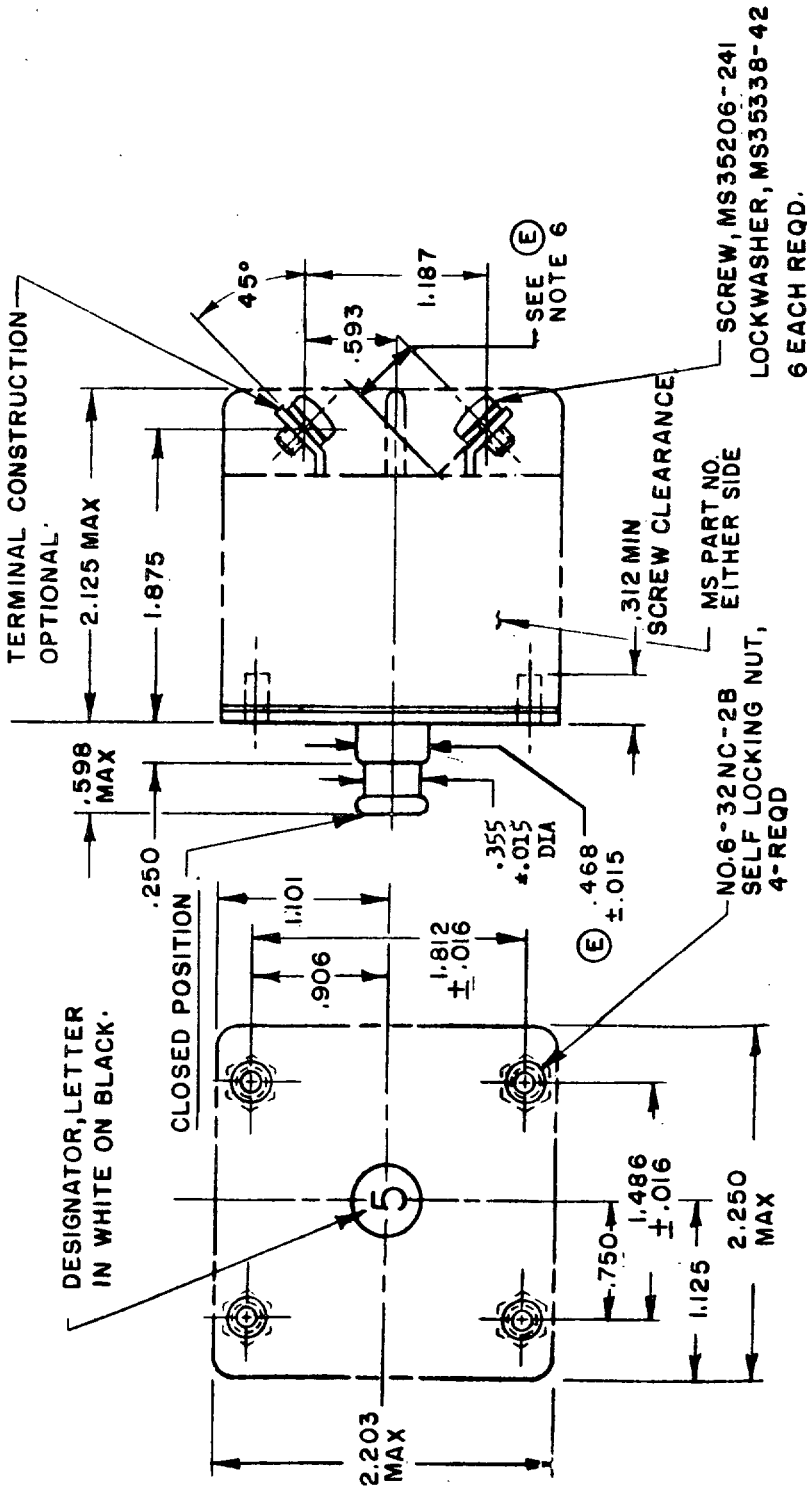

(E) DENOTES CHANGES

APPROVED 30 JAN 61 REVISED (A) 7 JUN 61 (B) 10 JULY 68 (C) 27 FEB 69 (D) 24 JUNE 71 (E) 12 APR 84

User activities: Army, Navy, Air Force

Reviewer activities: Army, Navy, Air Force


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 85 Other Cust NAVY - AS ARMY - ER	International interest (SEE NOTE)	TITLE CIRCUIT BREAKER-AIRCRAFT, TRIP-FREE, PUSH-PULL, 3-PHASE, 5 THRU 60 AMP., TYPE I	MILITARY STANDARD MS 21984
Procurement Specification MIL-C-5809		SUPERSEDES: MS25378(AER) MS24549(ASG)	SHEET | OF 4


DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5925-0148-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.

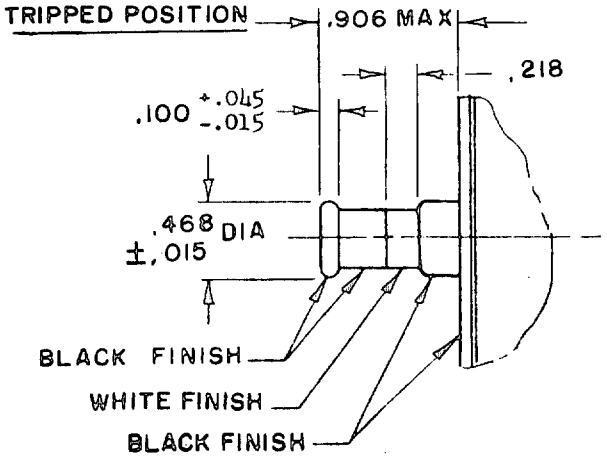

TRIPPED POSITION VIEW

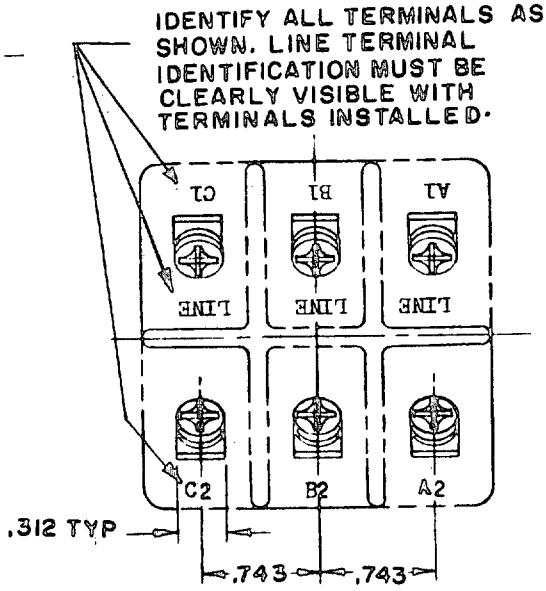

END VIEW (TERMINALS)

NOTES:

1. Dimensions in inches unless otherwise specified. Tolerance: Decimals ±.031; angles ±2°.
2. Phantom lines indicate that contour is optional provided maximum dimensions are not exceeded.
3. Trip free requirements per paragraph 6.4.6.2 of MIL-C-5809
4. Interchangeability relationship: MS21984 parts are interchangeable with MS25378 and MS24549 parts of the same dash numbers.
5. Certain provisions of this standard are subject of international agreement ASCC 12/3. When revision or cancellation of this standard is proposed, the (E) departmental custodians will inform their respective departmental standardization office so that appropriate action may be taken respecting the international agreement concerned.
6. .425 min. typ. clearance from c_L of screw to case.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 30 JAN 61 REVISED (E) FOR CHANGES SEE PAGES 1, 2 & 3

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: Army Navy Air Force

Reviewer activities: Army Navy Air Force

P.A. USAF - 85 Other Cust NAVY - AS ARMY - ER	International interest (SEE NOTE)	TITLE CIRCUIT BREAKER-AIRCRAFT, TRIP-FREE, PUSH-PULL, 3-PHASE, 5 THRU 60 AMP., TYPE I	MILITARY STANDARD MS 21984
Procurement Specification MIL-C-5809		SUPERSEDES: MS25378(AER) MS24549(ASG)	SHEET 2 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.

TABLE I

Dash number	Capacity amperes	Voltage drop Max	Weight Max lbs	Operating force max lbs		Endurance cycles				
						Resistive		Inductive		Mech no load
				Pullout	Reset	AC	DC	AC	DC	
-5	5	0.3	0.5	8	15	(a)	None	(a)	None	5,000
-7 1/2	7.5	"	"	"	"	5,000	"	5,000	"	"
-10	10	"	"	"	"	"	"	"	"	"
-15	15	"	"	"	"	"	"	"	"	"
-20	20	"	"	"	"	"	"	"	"	"
-25	25	"	"	"	"	"	"	"	"	"
-30	30	"	"	"	"	"	"	"	"	"
-35	35	"	"	"	"	"	"	"	"	"
-50	50	"	"	"	"	"	"	"	"	"
-60	60	"	"	"	"	"	"	"	"	"

(a) 400 cycle 115/200 volt system, tested at 120 ±5 volts 380-420 Hz.

TABLE II

Dash number	Rupture current (amperes) requirements											
	Test designation per MIL-C-5809											
	A		B		C	D	E	F	G		H	
	1 Ø	3 Ø	1 Ø	3 Ø					1 Ø	3 Ø	1 Ø	3 Ø
-5	*	*	*	*	*	*	*	*	2,500	1,500	2,500	1,500
-7 1/2	"	"	"	"	"	"	"	"	"	"	"	"
-10	"	"	"	"	"	"	"	"	"	"	"	"
-15	"	"	"	"	"	"	"	"	"	"	"	"
-20	"	"	"	"	"	"	"	"	"	"	"	"
-25	"	"	"	"	"	"	"	"	"	"	"	"
-30	"	"	"	"	"	"	"	"	"	"	"	"
-35	"	"	"	"	"	"	"	"	"	"	"	"
-50	"	"	"	"	"	"	"	"	"	"	"	"
-60	"	"	"	"	"	"	"	"	"	"	"	"

(*) Not applicable.

NOMINAL VOLTAGE RATING (E)

115 volts
400 Hz line to neutral or 200 volts
400 Hz line to line.

User activities: Army Navy Air Force
Reviewer activities: Army Navy Air Force
This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.
APPROVED 30 JAN 61 REVISED 'E' FOR CHANGES SEE PAGES 1, 2 & 3

P.A. USAF - 85	International interest	TITLE	MILITARY STANDARD
Other Cust NAVY — AS ARMY - ER	(SEE NOTE)	CIRCUIT BREAKER-AIRCRAFT, TRIP-FREE, PUSH-PULL, 3-PHASE, 5 THRU 60 AMP., TYPE I	MS21984
Procurement Specification MIL-C-5809		SUPERSEDES: MS25378(AER) MS24549(ASG)	SHEET 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army, Navy, Air Force

User activities: Army, Navy, Air Force

TABLE III

Dash number	Detail calibration requirements - trip time in seconds																
	+25°C							-55°C					+71°				
	Percent rated current							Percent rated current					Percent rated current				
	100	105	138	145	200	400	1,000	130	160	200	400	1,000	70	110	200	400	1,000
-5	*	NO TRIP - 1 HR MAX (b)	TRIP WITHIN - 1 HR (b)	ONE PHASE - 1 HR MAX (a)	10 to 70 (c)	2 to 10 (c)	.35 to 2.0 (c)	NO TRIP - 1 HR MAX (b)	TRIP WITHIN - 1 HR (b)	(*)	(*)	(*)	NO TRIP - 1 HR MAX (b)	TRIP WITHIN - 1 HR (b)	(*)	(*)	*
-7 1/2	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-10	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-15	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-20	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-25	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-30	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-35	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-50	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=
-60	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=	=

(a) Unbalanced three phase load. (One phase at specified overload. Other phases carrying rated current)
(b) Balanced three phase load unless otherwise indicated.
(c) Single phase load only. (No load other phases)
(d) Ambient temperature tolerance ±2°C.
(*) Not applicable.

TABLE IV

Environmental Performance	
Max operating altitude - FT	60,000
Operating ambient temp range	-55°C to +71°C
Vibration	MIL-STD-202, Method 204, condition A
Shock	30G MIL-STD-202, Method 213 Test J
Acceleration	10G

APPROVED 30 JAN 61 REVISED (E) FOR CHANGES SEE PAGES 1, 2 & 3

FED. SUP CLASS 5925

MILITARY STANDARD

MS21984

SHEET 4 OF 4

P.A. USAF - 85

Other Cust NAVY - AS ARMY - ER

International Interest (SEE NOTE)

TITLE CIRCUIT BREAKER-AIRCRAFT, TRIP-FREE, PUSH-PULL, 3-PHASE, 5 THRU 60 AMP., TYPE I

SUPERSEDES: MS25378(AER) MS24549(ASG)

Procurement Specification MIL-C-5809

DD FORM 672 1 SEP 63 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5925-0148-1

☆ U.S. GOVERNMENT PRINTING OFFICE: 1984-705-040/A2435

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:43Z
Check the source to verify that this is the current version before use.