INCH-POUND

MS25268M
12 March 2024
SUPERSEDING
MS25268L
05 October 2020

MILITARY SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, 5 AMPERES, 4 PDT, TYPE I, POTTED LEAD, HERMETICALLY SEALED

INACTIVE FOR NEW DESIGN AFTER 5 JUNE 1987.
NO SUPERSEDING SPECIFICATION. FOR NEW DESIGN USE MIL-PRF-83536/5 OR MIL-PRF-83536/6.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the relay described herein shall consist of this specification and the latest issue of MIL-PRF-6106.


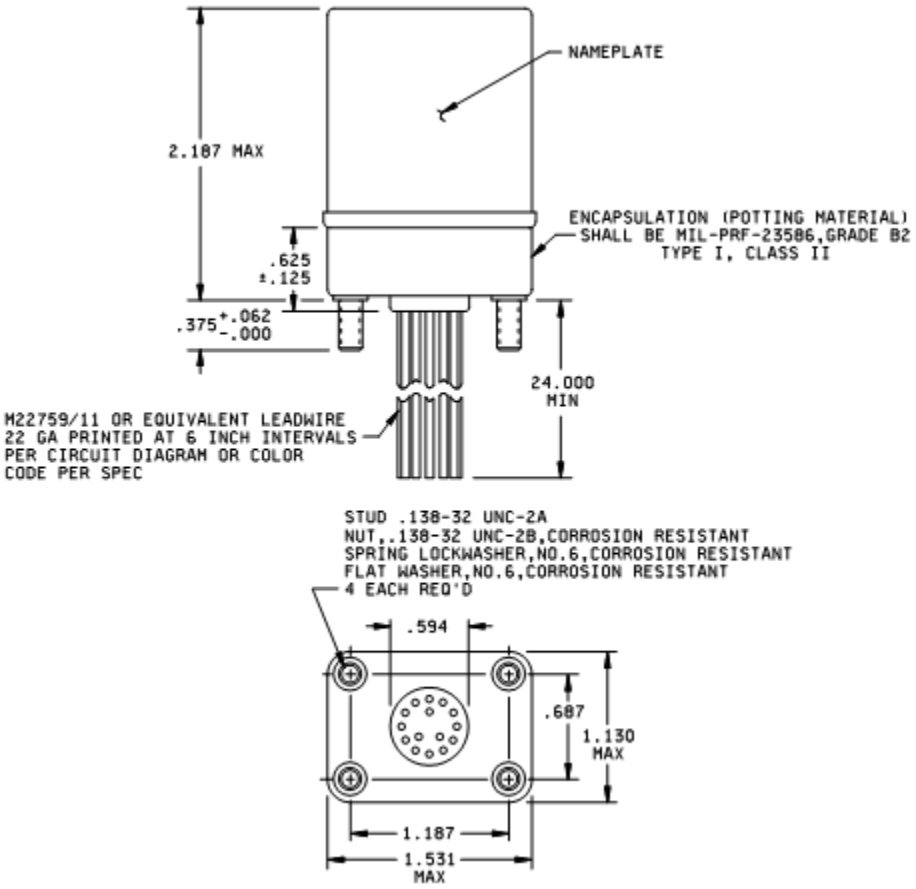



FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

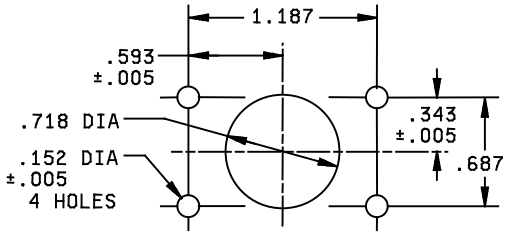

MOUNTING HOLE LAYOUT

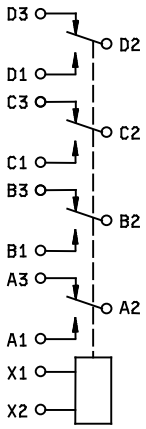

CIRCUIT D1,A1
SEE NOTE 4

Inches	mm	Inches	mm
0.005	0.13	0.625	15.88
0.010	0.25	0.687	17.45
0.062	1.57	0.718	18.24
0.125	3.18	1.130	28.70
0.152	3.86	1.187	30.15
0.343	8.71	1.531	38.89
0.375	9.53	2.187	55.55
0.593	15.06	24.000	609.60
0.594	15.09		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±0.005 (0.13 mm).
4. The use of diodes on ac relays in optional. Actual application must be shown on label.
5. In the event of conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Acquisition Streamlining and Standardization Information System (ASSIST) specified in the solicitation forms a part of this standard to the extent specified herein.
7. M22759/11 leadwire is in accordance with SAE-AS22759/11.

FIGURE 1. Dimensions and configurations - Continued.

TABLE I. Dash numbers and characteristics.

Dash number MS25268-	Type	Coil	Terminal type	Mounting	Max weight in pounds
D1	I	dc	Wire lead	Stud	0.57
A1	I	ac	Wire lead	Stud	0.57

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

TABLE II. Operating characteristics.

PIN MS25268-	Coil data											Time - milliseconds max					
	Coil	Rated			Max		1/ Max pick-up voltage			Hold voltage 2/	Drop out voltage 2/	Operate 3/	Release 4/	Contact Bounce			
														Main		Aux	
		Volts 1/	Freq Hz	Res Ω	Volts	Amp	Normal 2/	High temp test	Cont current test					NO	NC	NO	NC
D1	X1, X2	28	dc	N/A	29	0.15	18	19.8	22.5	7.0	1.5	20	20	2	2	N/A	N/A
A1	X1, X2	115	400	N/A	122	0.05	90	95	103	30	5.0	25	50	2	2	N/A	N/A

1/ CAUTION: Use of any coil voltage less than rated coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With rated coil voltage.
4/ From rated coil voltage.

TABLE III. Rated contact load (amperes per pole) (case grounded).

Type of load	Life operating cycles x 10^3	28 V dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	100	5	5			5	4							
Inductive	100													
Inductive	20	3	3			3	2							
Motor	100	1.5	1.5			1.5	1							
Lamp	100	0.8	0.8			0.8	0.6							
Transfer load														2/
Mechanical life reduced current	400	1.25	1.25			1.25	1							
Mixed loads	Applicable per specification MIL-PRF-6106													

1/ Absence of value indicates relay is not rated for 3-phase application.
2/ Transfer load indicates relay is suitable for transfer between unsynchronized ac power supplies at rating indicated.

Environmental characteristics.

Temperature range	-70°C to +125°C
Max altitude rating	80,000 ft
Shock G-level	50 g's
Duration	11 ms
Max duration contact opening	10μs
Vibration - sinusoidal (see chart below)	
G-level	10 g's
Frequency range	5 - 1,500 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

Vibration - random	
Applicable spec	N/A
Power spectral density	N/A
RMS G min	N/A
Frequency range	N/A
Curve	N/A
High shock	N/A
Acceleration	15 g's

Electrical characteristics.

Minimum insulation resistance, initial	100 megohms.
After life or environmental tests	50 megohms.

Dielectric strength (sea level).

	Initial	After life tests
Coil to case	1,050 V rms	1,000 V rms
Aux contacts		
All other points	1,050 V rms	1,000 V rms

Dielectric strength (altitude).

	80,000 ft
Coil to case	1,000 V rms
Aux contacts	
All other points	1,000 V rms

Max contact drop initial	0.150 volt.
After life test	0.175 volt.
Overload current	20 amperes.
Rupture current	25 amperes.
Duty rating	Continuous.
RFI specification	MIL-STD-461

(Applicable to coil circuits of ac operated relays).

Group A acceptance reports shall be submitted to the qualifying activity every 36 months in order to retain qualification for this specification.

Group B and group C testing is not required. The manufacturer shall notify the qualifying activity in the event of any design or construction changes, and shall impose additional testing requirements as necessary.

Qualification by similarity: See MIL-PRF-6106.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-6106, this document references the following:

MIL-PRF-23586
MIL-STD-461
SAE-AS22759/11

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.

Custodians:
Navy - AS
Air Force - 85
DLA - CC

Review activity:
Navy - EC

Preparing activity:
DLA - CC

(Project 5945-2024-014)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:07Z
Check the source to verify that this is the current version before use.