INCH-POUND

MS27476G
w/AMENDMENT 1
10 September 2024
SUPERSEDING
MS27476G
13 April 2012

DETAIL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, BOX MOUNTING, SOLDER TYPE, HERMETIC SEAL, SERIES II

Reactivated after 24 May 2004 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.


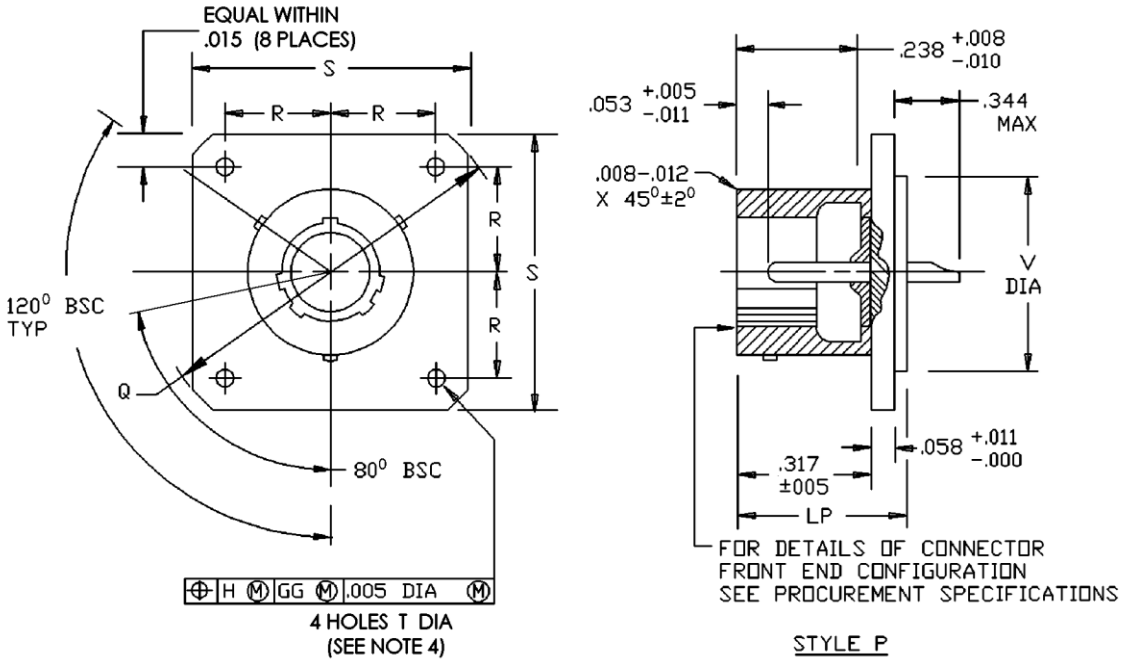


FIGURE 1. Receptacle, class Y.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

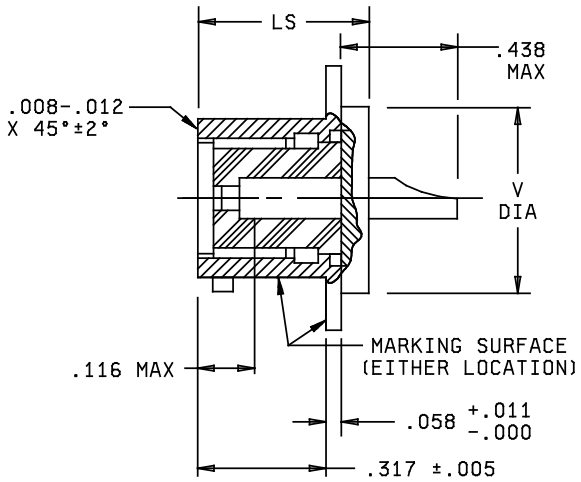

STYLE S

Shell size	LP max	LS max	Q max dia	R BSC	S max	T +.010 -.005	V dia +.001 -.005
8	.453	.562	1.078	.297	.828	.120	.562
10			1.266	.3595	.954		.672
12			1.391	.406	1.047		.781
14			1.516	.453	1.141		.906
16			1.641	.4845	1.234		1.031
18			1.766	.531	1.328		1.156
20			1.891	.578	1.453		1.250
22			2.016	.625	1.578		1.375
24	.484	.594	2.204	.6875	1.703	.147	1.500

FIGURE 1. Receptacle, class Y – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.317	8.05	.754	19.15	1.328	33.73
.007	0.18	.344	8.74	.781	19.84	1.355	34.42
.008	0.20	.3595	9.13	.828	21.03	1.375	34.93
.010	0.25	.403	10.24	.879	22.33	1.391	35.33
.011	0.28	.406	10.31	.906	23.01	1.453	36.91
.012	0.30	.438	11.13	.954	24.23	1.500	38.10
.015	0.38	.453	11.51	.980	24.89	1.516	38.51
.028	0.71	.484	12.29	1.031	26.19	1.578	40.08
.053	1.34	.4845	12.31	1.047	26.59	1.641	41.68
.058	1.47	.515	13.08	1.078	27.38	1.703	43.26
.078	1.98	.531	13.49	1.105	28.07	1.766	44.86
.116	2.95	.562	14.27	1.141	28.98	1.891	48.03
.120	3.05	.578	14.68	1.156	29.36	2.016	51.21
.139	3.53	.594	15.09	1.230	31.24	2.204	55.98
.147	3.73	.625	15.88	1.234	31.34		
.223	5.66	.629	15.98	1.250	31.75		
.238	6.05	.672	17.07	1.266	32.16		
.297	1.54	.6875	17.46				

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For main keyway and keyway positions, see MIL-DTL-38999.
4. The gauge features for GG shall be .004 (0.10 mm) smaller than MMC size at basic location.


FIGURE 1. Receptacle, class Y – Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1. Interface dimensions shall conform to MIL-DTL-38999.
This receptacle mates with MS27473, MS27480, MS27484 and MS27500.
Insert arrangements: See MIL-STD-1560.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

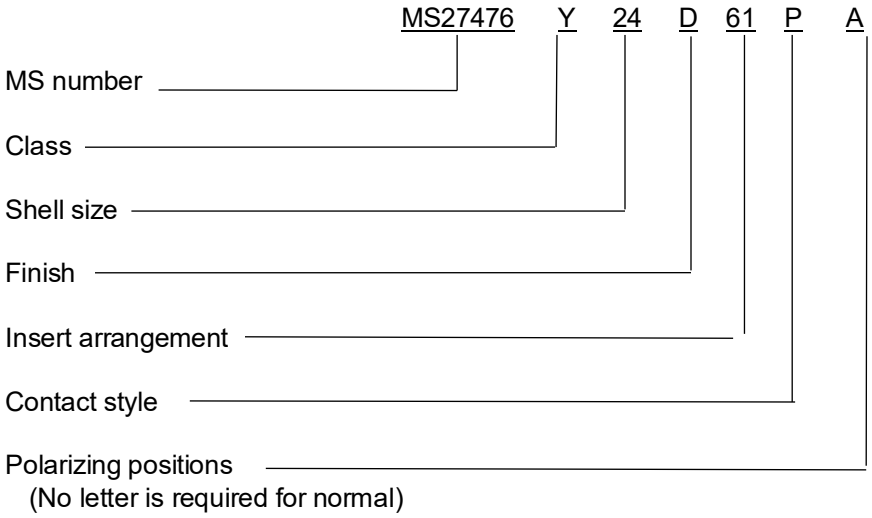

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27473
MS27480
MS27484
MS27500

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force - 85
DLA – CC

Preparing activity:
DLA – CC

(Project: 5935-2024-162)

Review activities:
Army – MI
Navy – EC, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.