FED. SUP CLASS
5325

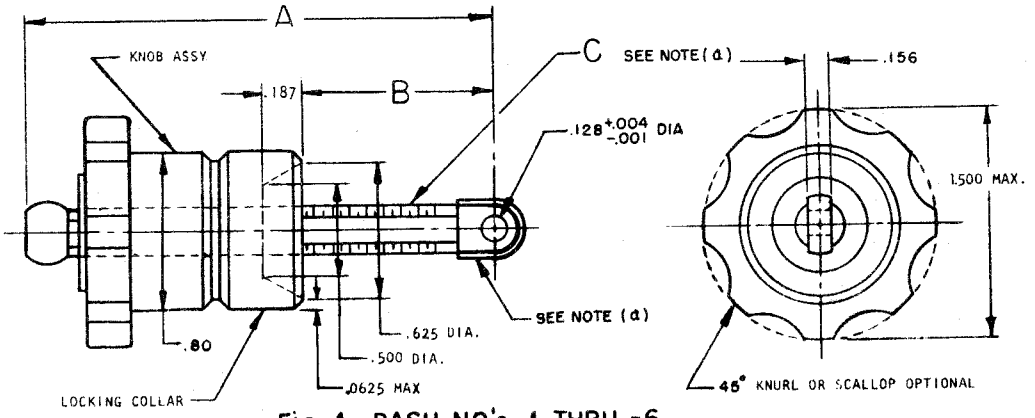


Fig. 1. DASH NO's -1 THRU -6

DASH NUMBER	A	B ✱	(a) C	(b) LOAD LBS MAX	(c) ACCESSORIES HINGE	PIN	COTTER PIN
-1	1.875	1.000	.250-28 UNF-3A	75	NAS573-10	MS20392-1C15	MS24665-151
-2	2.250	1.375					
-3	2.750	1.875					
-4	1.875	1.000	.312-24 UNF-3A	153	NAS573-9		
-5	2.250	1.375					
-6	2.750	1.875					

✱ CLEARANCE ON OPEN OR EXTENDED POSITION.

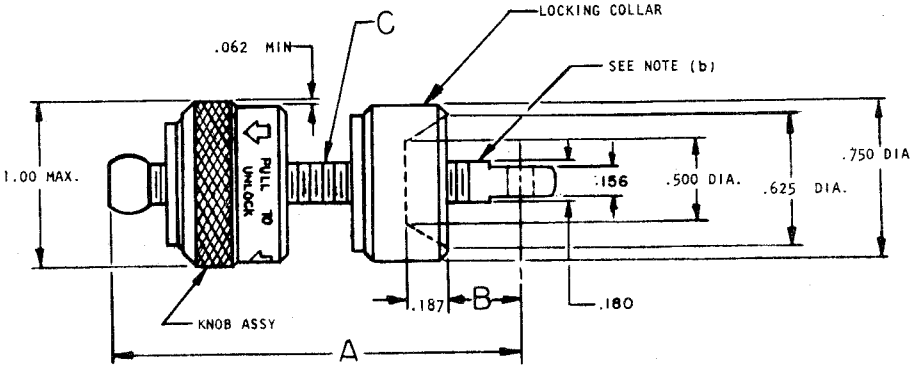


Fig. 2. DASH NO's -7 THRU -9

DASH NUMBER	A	B ✱	(a) C	(b) LOAD LBS MAX	(c) ACCESSORIES HINGE	PIN	COTTER PIN
-7	1.875	1.000	.250-28 UNF-3A	30	NAS573-10	MS20392-1C15	MS24665-151
-8	2.250	1.375					
-9	2.750	1.875					

✱ CLEARANCE ON OPEN OR EXTENDED POSITION.

(a) THE BOLT C IS FLAT ON TWO SIDES TO PERMIT THE LOCKING COLLAR TO SLIDE ON THE BOLT DIMENSION ON FLAT SIDE OF BOLT C THREADED ALONG THREADED PORTION IS .180, AND END SIDE THAT FITS INTO HINGE NAS573-9 AND -10 IS .156.

(b) LOAD IS THE PORTION OF THE WEIGHT OF THE ITEM BEING HELD PER FASTENER.

(c) ACCESSORIES NOT SUPPLIED WITH PART NUMBER.

Ⓓ INACTIVE FOR NEW DESIGN AFTER 26 JULY 1978. USE MS14108.

NOTE: CERTAIN INTERNAL DESIGN OF THIS FASTENER MAY INFRINGE RIGHTS ASSERTED UNDER PATENT 2,728,895 SELF-LOCKING COUPLING DEVICE.

APPROVED 16 Apr 69 REVISED (A) 1 Apr 70 (B) 10 May 72 (C) 16 May 73 (D) 26 July 78

Review activities:
Air Force-85,99
DLA-IS

This military standard is approved by the (activity), Department of the (AF) and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Air Force - 11 Other Cust	TITLE FASTENER, SELF-LOCKING CASE MOUNTING, ELECTRONIC EQUIPMENT	MILITARY STANDARD MS27600(USAF)
PROCUREMENT SPECIFICATION MIL-C-172	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 65 672-1

EDITION OF 1 SEP 57 MAY BE USED.

PROJECT NO. 5325F002

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5325

1. MATERIAL: CORROSION RESISTANT STEEL PER QQ-S-763 AND PASSIVATED PER QQ-P-35.

2. FINISH: SEE PROCUREMENT SPECIFICATION.

3. THE FASTENER SHALL WITHSTAND 2000 OR MORE CYCLES OF LOCKING AND UNLOCKING WITHOUT DEGRADATION OF PERFORMANCE.

4. FASTENER SHALL BE FREE OF ALL BURRS, SLIVERS AND SHARP EDGES.

5. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE: DECIMAL ±.010.

6. THE FASTENER SHALL LOCK EVERY 15° OR IN SMALLER INCREMENTS.

7. THE FASTENER SHALL TIGHTEN BY PULLING AND TURNING KNOB ASSY CLOCKWISE AND SHALL LOCK UPON RELEASE OF THE KNOB ASSY. UNLOCKING SHALL BE ACCOMPLISHED BY PULLING AND TURNING KNOB ASSY COUNTERCLOCKWISE. NO TOOLS SHALL BE REQUIRED TO TIGHTEN, LOCK OR UNLOCK THE FASTENER.

8. METHOD OF LOCKING AND UNLOCKING SHALL BE INDICATED ON THE KNOB ASSY.

9. THE FASTENER WHEN INSTALLED WITH MAXIMUM LOAD SHALL NOT BECOME LOOSE OR UNLOCK UNDER VIBRATION OR SHOCK WHEN SUBJECTED TO MIL-STD-810, METHOD 514, PROCEDURE I, CURVE E; AND METHOD 516, PROCEDURE I, USING SHOCK PULSE 516-2.

APPROVED 16 Apr 69 REVISED (D) 26 JULY 78

Review activities:
Air Force-85,99
DLA-IS

This military standard is approved by the (activity), Department of the (AF) and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. Air Force - 11 Other Cust	TITLE FASTENER, SELF-LOCKING CASE MOUNTING, ELECTRONIC EQUIPMENT	MILITARY STANDARD MS27600 (USAF)
PROCUREMENT SPECIFICATION MIL-C-172	SUPERSEDES:	SHEET 2 OF

DD FORM SEP 67 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:45Z
Check the source to verify that this is the current version before use.