INCH-POUND
MS27769C
3 January 2022
SUPERSEDING
MS27769B
9 June 2011

DETAIL SPECIFICATION SHEET

PLUG, PIPE, COUNTERSINK HEX HEAD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and SAE-AS4842.

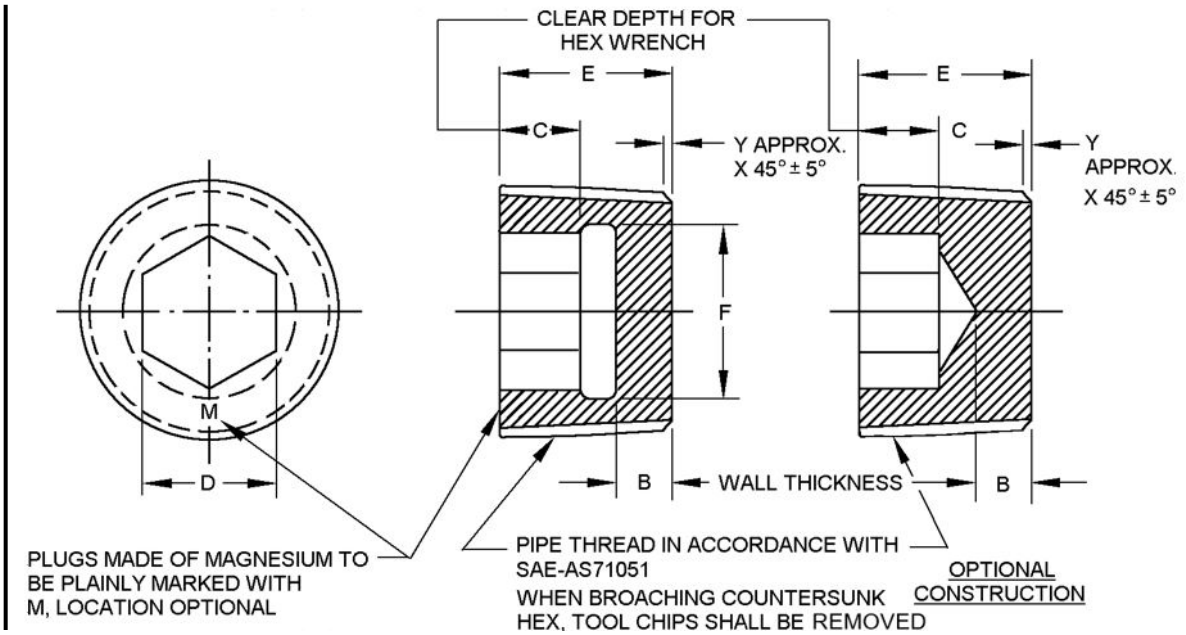


FIGURE 1. Pipe, plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.

Dash number	A Pipe thread SAE-AS71051	B Min inches (mm)	C Min inches (mm)	D inches (mm)	
				Min	Max
1	1/16- 27 ANPT	.094 (2.39)	.094 (2.39)	.1563 (3.970)	.1582 (4.018)
2	1/8-27 ANPT	.094 (2.39)	.125 (3.18)	.1875 (4.763)	.1895 (4.813)
3	1/4-18 ANPT	.125 (3.18)	.219 (5.56)	.2500 (6.350)	.2520 (6.401)
4	3/8-18 ANPT	.125 (3.18)	.219 (5.56)	.3125 (7.938)	.3155 (8.014)
5	1/2-14 ANPT	.125 (3.18)	.312 (7.92)	.3750 (9.525)	.3780 (9.601)
6	3/4-14 ANPT	.125 (3.18)	.328 (8.33)	.5625 (14.288)	.5655 (14.364)
7	1-11 ANPT	.125 (3.18)	.438 (11.13)	.6250 (15.875)	.6290 (15.977)
8	1-1/4-11 ANPT	.125 (3.18)	.453 (11.51)	.7500 (19.050)	.7540 (19.152)

Dash number	E inches (mm)	F Max Diameter inches (mm)	Y inches (mm)
1	.270 (6.86)	.187 (4.75)	.030 (0.76)
2	.270 (6.86)	.244 (6.20)	
3	.410 (10.41)	.326 (8.28)	.050 (1.27)
4	.410 (10.41)	.400 (10.16)	
5	.540 (13.72)	.463 (11.76)	.060 (1.52)
6	.550 (13.97)	.681 (17.30)	
7	.690 (17.53)	.775 (19.69)	.080 (2.03)
8	.710 (18.03)	1.072 (27.23)	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.010 inch (0.25 mm).
4. Surface roughness shall be 125 Ra max, see ASME B46.1. Machined surfaces shall be finished to 125µ in Ra, forged surfaces shall be 250µ inches Ra, unless otherwise specified on the figures. Surface finish shall be in accordance with ASME B46.1.
5. Break sharp edges, remove all hanging burrs and slivers.

FIGURE 1. Pipe, plug - Continued.

REQUIREMENTS:

Pipe plug shall be as specified on figure 1.

Procurement specification: SAE-AS4842.

Materials:

Steel shall be in accordance with SAE-AMS6382 (alloy 4140), hardened (oil quench) and temper, Rockwell hardness C26-32.

Copper alloy shall be in accordance with ASTM B16/B16M alloy C36000, half hard or ASTM B124/B124M alloy C37700.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.

Aluminum alloy 7075-T73 shall be in accordance with ASTM B211/B211M or SAE-AMS-QQ-A-225/9.

Magnesium alloy AZ31B shall be in accordance with ASTM B107/B107M.

Corrosion resistant steel (CRES), type 347, shall be in accordance with SAE-AMS5646. CRES, type 321 shall be in accordance with SAE-AMS5645.

Titanium alloy shall be in accordance with SAE-AMS4928 (6AI-4V annealed).


Materials and finishes designators shall be in accordance with table I.

TABLE I. Material and finish designators.

Designator	Material	Finish
Blank	Steel	Carbon steel cadmium plated in accordance withSAE-AMS-QQ-P-416, type II, class 2 3/
A	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5
C	Copper alloy	See Procurement Specification
M	Magnesium alloy 2/	Magnesium finish in accordance withSAE-AMS-M-3171, Type III
R	CRES, alloy 321	See Procurement Specification
S	CRES, alloy 347	See Procurement Specification
T	Titanium alloy 1/	Cold finished in accordance with SAE-AMS2241
U	Unplated steel	See Procurement Specification
W	Aluminum	See Procurement Specification

1/ Titanium shall not be used in oxygen systems.
2/ Magnesium alloy plugs shall not be used in hydraulic systems or valves. Magnesium metal shall not be used in oxygen systems. In addition, its alloys are not to be used except in areas with minimal exposure to corrosive environments. Reactivity with halogenated compounds constrains its use with lubricants containing chlorine and fluorine.
3/ Cadmium is an R1, R2, and D1 substance in the Aerospace and Defense Declarable Substance List DO NOT USE THIS DESIGNATOR FOR NEW DESIGNS. The user is directed to designator A for replacement. If corrosion resistance exceeding the 120 hour min salt spray per ASTM B117 is required, consider designators R or S for CRES options.

Part or Identifying Number (PIN): The PIN consists of the letters “MS”, the specification sheet number, a dash or letter from table I to designate the material type, and a number to designate pipe plug size. Unassigned PIN’s shall not be used.

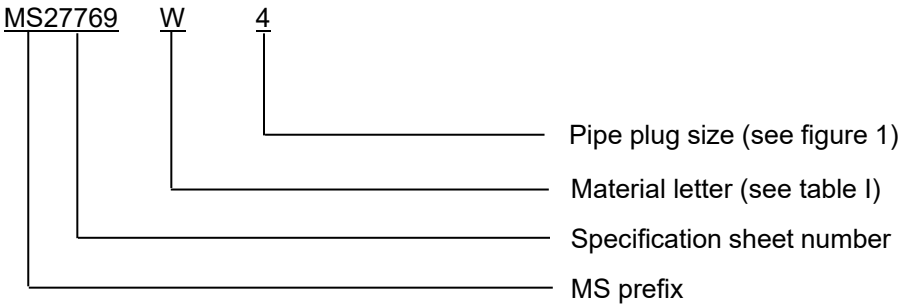

PIN example: MS27769W4 indicates a pipe plug, aluminum alloy 7075-T73, 3/8 -18 ANPT.

Supersession data: Aluminum alloy 2014 “D” designator has been replaced by aluminum alloy 7075-T73 “W” designator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to SAE-AS4842, this document references the following:

ASME B46.1	SAE-AMS-QQ-A-225/9
ASTM B16/B16M	SAE-AMS-QQ-P-416
ASTM B107/B107M	SAE-AMS2241
ASTM B117	SAE-AMS4928
ASTM B124/B124M	SAE-AMS5645
ASTM B211/B211M	SAE-AMS5646
ASTM B633	SAE-AMS6382
SAE-AMS-M-3171	SAE-AS71051

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 71
DLA - CC

Review activities:
Navy - MC, SH

Preparing activity:
DLA - CC

(Project 4730-2022-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.