
NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by the activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
6130

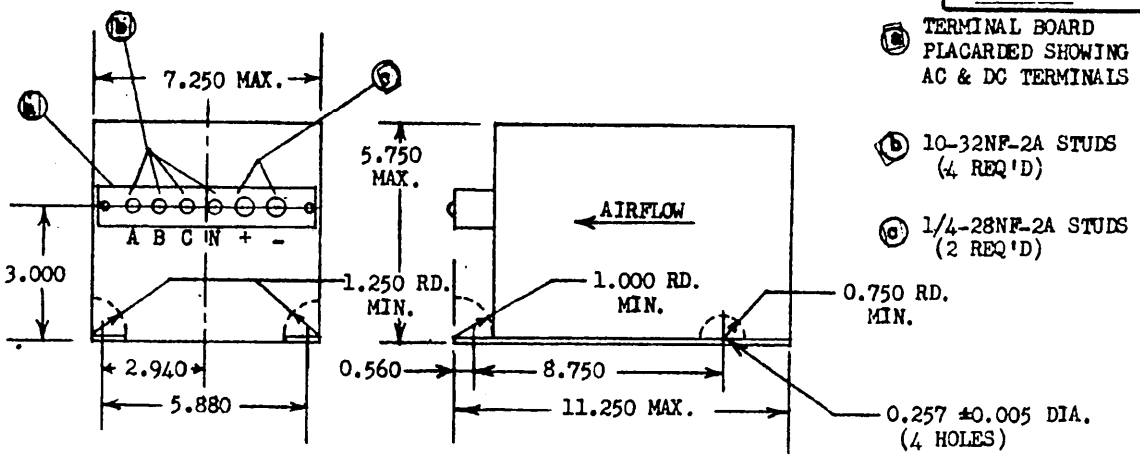


(a) TERMINAL BOARD PLACARDED SHOWING AC & DC TERMINALS

(b) 10-32NF-2A STUDS (4 REQ'D)

(c) 1/4-28NF-2A STUDS (2 REQ'D)

INPUT	
Voltage (Nominal)	115/200 Volts
Frequency (Nominal)	400 cps
Phase	3
OUTPUT	
Voltage (nominal) D.C.	28 Volts
Current to 60,000 ft. alt.	150 Amp.
EFFICIENCY	
At sea level, 25 ±15°C, half rated load to rated load	85% Min.
WEIGHT (lbs.)	16.0 Max.

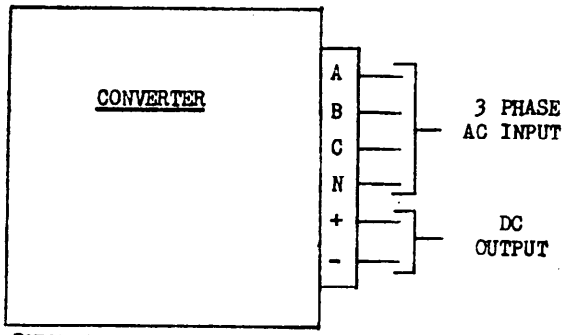

INPUT PHASE ROTATION A, B, C

MS PART NO.
MS-28125-3

For any combination of conditions listed below the output voltage shall remain within the indicated limits

Conditions	Output Voltage Limits
Input voltage varied between 109.5/190 and 121/210 volts, and input frequency varied between 380 to 420 cps.	
Load varied from 0 to full load.	Low 24.0 High 34.0
Load varied from 200 milliamperes to full load.	Low 24.0 High 31.0
Ambient temperature varied from -55°C to +100°C at any altitude from sea level to 60,000 ft. **(in accordance with Note 17 below).** Mounted in any position.	

Notes:

1. All dimensions are shown in inches. Tolerances are ±0.015 unless otherwise shown.
2. The weight and volume limitations shown on this drawing shall include the weight and volume of all auxiliary apparatus necessary to make this unit conform to the procurement specification.
3. This drawing and the procurement specification complement one another and together completely define the product.

APPROVED 21 Jul 60 REVISED (A) 10 Oct 1961 (B) 20 Dec 1963 (C) 21 July 1975

P.A. NAVY - BUWEPS Other Cust	TITLE **CONVERTER, 150 AMPERE, CLASS B**	MILITARY STANDARD **MS28125(WEP)**
Procurement Specification MIL-C-7115	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 57 672 *(Limited coordination)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

25 Sep 09
4299
DATE

DRAWN BY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

4. Blank.

5. Blank.

6. Cooling. The unit shall be self-cooled by a motor operated fan. The motor shall conform to MIL-M-7969.

7. Paragraph 3.4.17 and 4.5.13 of Specification MIL-C-7115B not applicable.

8. Ripple Voltage shall not exceed 1.5 volt peak at any required operating condition.

9. Dielectric Strength. The unit shall be capable of withstanding 1500V rms at commercial frequency applied for one minute between the input terminals and the case, and 1000V rms at commercial frequency for one minute between the output terminals and the case.

10. Input Power Factor shall be no less than 0.85 from one-half to rated load.

11. Overload. The unit shall be capable of providing overload currents as follows:

    a. 225 amperes for 5 minutes at a minimum output voltage of 22 volts.
    b. 300 amperes for 5 seconds at a minimum output voltage of 18 volts.
    c. 750 amperes for 5 seconds at a minimum output voltage of 15 volts.

12. Open Phase Operation. The unit shall deliver full load current with one phase disconnected with a minimum output voltage of 15 volts at an input of 109.5/190V.

13. Vibration Test shall be in accordance with Procedure XII of MIL-E-5272 with the maximum ambient temperature of 100°C.

14. Temperature Shock Test shall be conducted in accordance with the temperature shock test, Procedure I of MIL-E-5272. The maximum ambient temperature shall be 100°C.

15. Acceleration Test shall be conducted with an acceleration force of 15 g.

16. Salt Spray Test shall be conducted for 50 hours and in accordance with Procedure I of MIL-E-5272.

17. Life Test shall be conducted as follows:

    a. 600 hours of full load cyclic operation consisting of:

        1. 3 hrs. at 35,000 ft. and room ambient temperature
        2. 1 hr. at 35,000 ft. and 100°C ambient temperature
        3. 2 hrs. at room ambient and sea level conditions

    b. 99 hours of full load cyclic operation as follows:

        Starting at room ambient conditions change the ambient to 100°C and 60,000 ft altitude during a 30 minute period. Operate at this ambient for 15 minutes. Decrease the ambient to room ambient conditions during the next 30 minutes. Operate for one hour at room ambient conditions.

    c. 200 hrs. of full load operation at sea level conditions and 60°C temperature.

    d. 100 hrs. of full load operation at room ambient conditions.

18. Radio Frequency Energy. Induction of High Frequency energy into ac input of converter shall not result in failure of rectifiers or other components. The ac wiring shall not be bundled together with the dc wiring.

© INACTIVE FOR DESIGN AFTER 21 July 1975
NO SUPERSEDING STANDARD

P.A.	TITLE	MILITARY STANDARD
NAVY - BUWEPS Other Cust	CONVERTER, 150 AMPERE, CLASS B	MS28125(WEP)
Procurement Specification MIL-C-7115	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

7109
DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.