INCH-POUND

MS35254C
w/AMENDMENT 1
2 January 2025
SUPERSEDING
MS35254C
10 November 2009

DETAIL SPECIFICATION SHEET

BRACE, CORNER, BOX 3 QUARTER-ROUND FLANGES, 3 MOUNTING HOLES

Inactive for new design after 31 July 1997.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

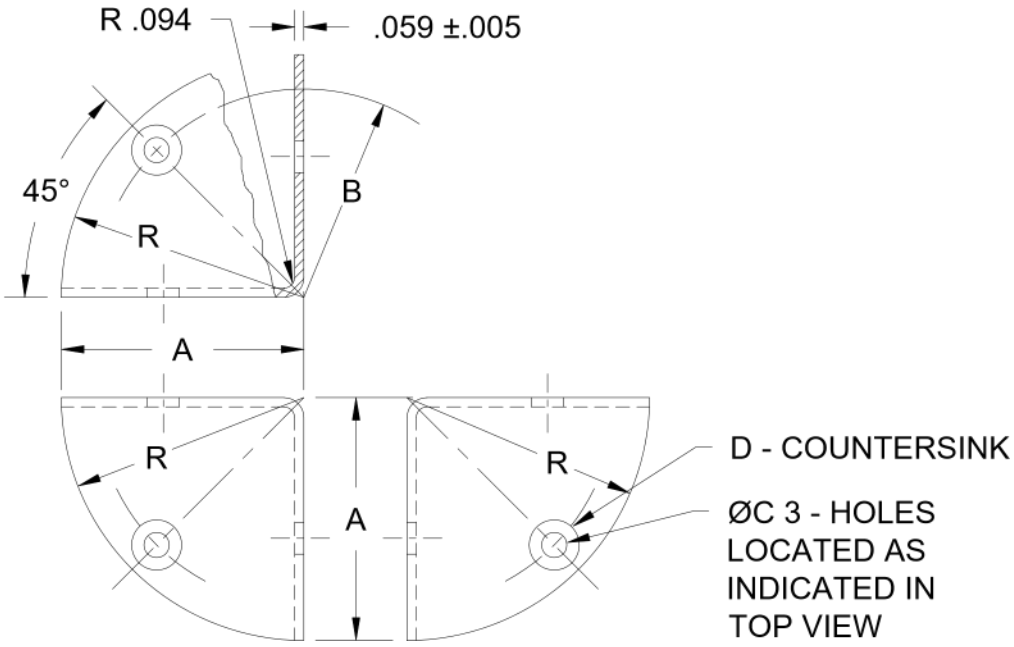


FIGURE 1. Brace.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

	DIMENSIONS				MATERIAL
PART NUMBER	A LENGTH	B RADIUS	ØC ±.005	D COUNTERSINK	
MS35254-1	2.000	1.750	.204	82° TO Ø.375 +.016	BRASS
MS35254-2	2.000	1.750	.204	NONE	
MS35254-3	2.000	1.750	.180	82° TO Ø.328 +.016	
MS35254-4	2.000	1.750	.180	NONE	
MS35254-5	1.500	1.250	.180	82° TO Ø.328 +.016	
MS35254-6	1.500	1.250	.180	NONE	
MS35254-7	1.500	1.250	.152	82° TO Ø.281 +.016	
MS35254-8	1.500	1.250	.152	NONE	
MS35254-9	1.250	1.000	.152	82° TO Ø.281 +.016	
MS35254-10	1.250	1.000	.152	NONE	
MS35254-11	1.250	1.000	.128	82° TO Ø.219 +.016	
MS35254-12	1.250	1.000	.128	NONE	
MS35254-13	1.125	.875	.128	82° TO Ø.219 +.016	
MS35254-14	1.125	.875	.128	NONE	
MS35254-15	2.000	1.750	.204	82° TO Ø.375 +.016	STEEL
MS35254-16	2.000	1.750	.204	NONE	
MS35254-17	2.000	1.750	.180	82° TO Ø.328 +.016	
MS35254-18	2.000	1.750	.180	NONE	
MS35254-19	1.500	1.250	.180	82° TO Ø.328 +.016	
MS35254-20	1.500	1.250	.180	NONE	
MS35254-21	1.500	1.250	.152	82° TO Ø.281 +.016	
MS35254-22	1.500	1.250	.152	NONE	
MS35254-23	1.250	1.000	.152	82° TO Ø.281 +.016	
MS35254-24	1.250	1.000	.152	NONE	
MS35254-25	1.250	1.000	.128	82° TO Ø.219 +.016	
MS35254-26	1.250	1.000	.128	NONE	
MS35254-27	1.125	.875	.128	82° TO Ø.219 +.016	
MS35254-28	1.125	.875	.128	NONE	

Requirements:

1. Material:

   Brass, in accordance with ASTM B121/B121M, H02 (half-hard).
   Steel, in accordance with QQ-S-698, cold rolled, commercial quality, No. 2 temper, No. 1 finish.


2. Finish:

   Brass, plain.
   Steel, zinc plated in accordance with ASTM B633, Type IV, SC3.

3. Tolerance: Tolerances on decimals ±.016, on angles ±1°, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

4. Part or identifying Number (PIN): The PIN consist of the letters “MS”, the specification number, and dash number.

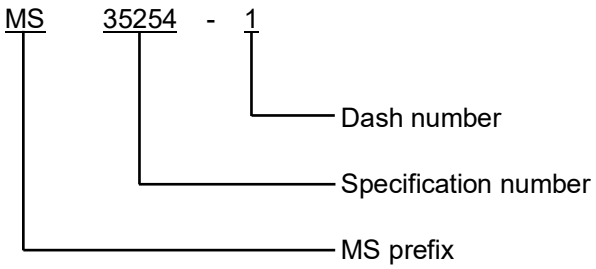

Notes:

1. All dimensions are in inches, unless otherwise specified.

2. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Reference documents. This document references the following:

ASTM B121/B121M
QQ-S-698
ASTM B633

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - YD
Air Force – 99
DLA - CC

Preparing Activity:
DLA - CC

(Project 5340-2025-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.