
FED. SUP CLASS
4730

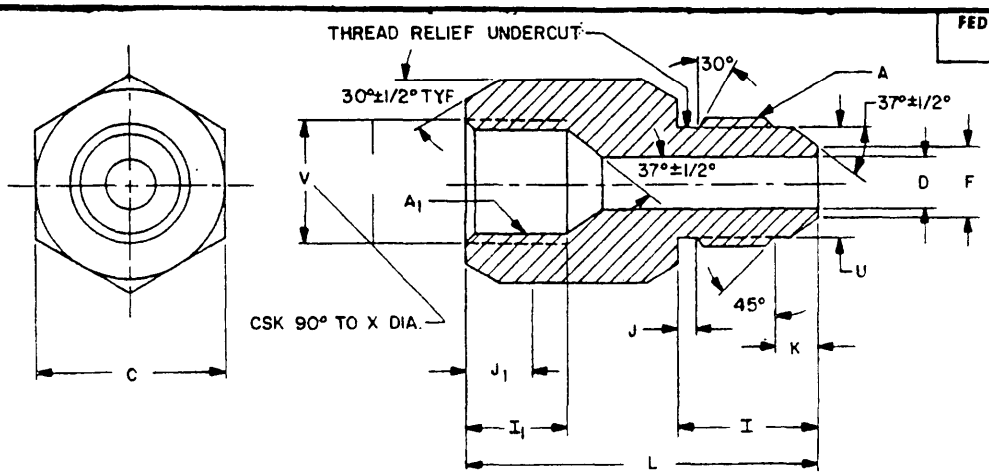

TUBE - REDUCER: 37 DEGREE FLARE - INCHES AND MILLIMETERS

DASH NO.	A, STRAIGHT THREAD	MINOR DIA		A_1, STRAIGHT THREAD	C	F		U		K		J_1	
	NOM SIZE CLASS A	IN	MM	NOM SIZE CLASS B	HEX	IN	MM	IN	MM	IN	MM	IN	MM
		+.005 -.000	+.13 -.00		NOM	±.003	±.08	+.000 -.005	+.000 -.130	+.015 -.000	+.40 -.00	FULL	THREAD
5-4	1/2 — 20	.451	11.46	7/16 — 20	5/8	.193	4.90	.359	9.120	.193	4.90	.261	6,63
6-5	9/16 — 18	.508	12.90	1/2 — 20	11/16	.255	6.48	.421	10.690	.193	4.90	.261	6,63
10-8	7/8 — 14	.804	20.42	3/4 — 16	1	.426	10.82	.654	16.610	.253	6.43	.354	8,99
12-10	1-1/16-12	.979	24.86	7/8 — 14	1-1/4	.539	13.70	.767	19.480	.266	6.80	.370	9,40

DASH NO.	I_1		J		I		L		D		V	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
	±.005	+.015 -.000	±.013	± .40	±.015	± .40	±.010	± .25	DRILL		+.015 -.000	+ .40 .00
5-4	.344	8.740	.075	1.90	.550	14.00	1.156	29.30	.172	4.40	.505	12.80
6-5	.344	8.740	.075	1.90	.550	14.00	1.188	30.20	.234	5.94	.567	14.40
10-8	.469	11.910	.094	2.40	.657	16.70	1.437	36.50	.391	9.93	.880	22.35
12-10	.500	12.700	.107	2.72	.758	19.30	1.656	42.00	.484	12.29	1.067	27.10

NOTES:
1. MATERIAL SHALL BE CARBON STEEL WITH PROTECTIVE PLATING IN ACCORDANCE WITH MIL-F-18866.
2. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
3. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES (MILLIMETERS).
4. PART NUMBER EXAMPLE:
   MS39323 - 5-4, -5 INDICATES 5/16-INCH O.D. TUBE IN 1/16-INCH INCREMENTS,
   -4 INDICATES 1/4-INCH O.D. TUBE IN 1/16-INCH INCREMENTS.
5. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL.
6. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

ENTIRE STANDARD REVISED

REVIEW ACTIVITIES: CS, AR
USER ACTIVITIES AT

APPROVED 4 MAY 1967 REVISED (A) 9 MAY 80


THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ME Other Cust	TITLE TUBE-REDUCER: 37 DEGREE FLARE	MILITARY STANDARD MS39323 (ME)
PROCUREMENT SPECIFICATIONS MIL-F-18866	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-A061

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

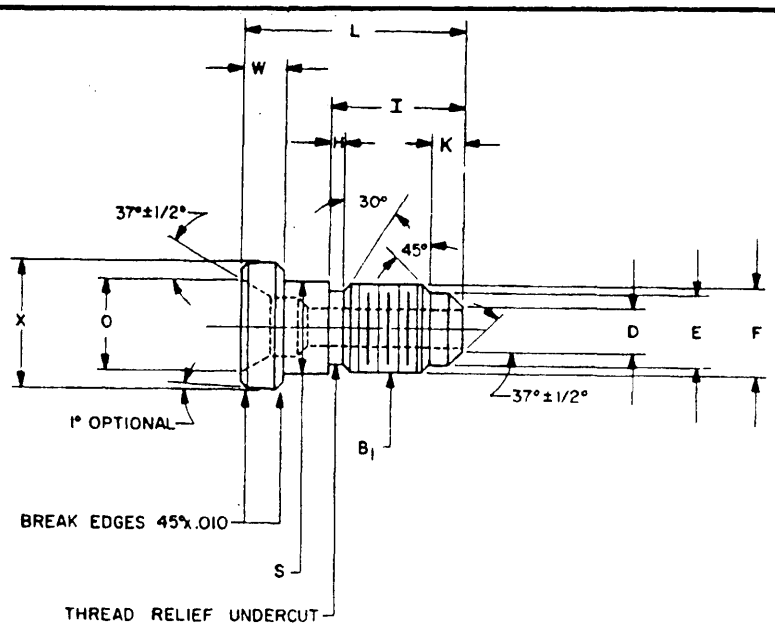

TUBE - REDUCER : 37 DEGREE FLARE - INCHES AND MILLIMETERS

DASH NO.	B_1, STRAIGHT THREAD	PITCH DIA IN		PITCH DIA MM		E		F		K		H	
	NOM SIZE CLASS 2A	MAX	MIN	MAX	MIN	IN	MM	IN	MM	IN	MM	IN	MM
						±.003	± .08	+.000 -.005	+ .00 - .13	±.015 -.000	± .40 - .00	±.015 -.000	± 40 - .00
6-4	7/16 – 20	.4037	.3995	10.25	10.47	.193	4.90	.359	9.12	.193	4.90	.075	1.90
8-4	7/16 – 20	.4037	.3995	10.25	10.47	.193	4.90	.359	9.12	.193	4.90	.075	1.90
10-4	7/16 – 20	.4037	.3995	10.25	10.47	.193	4.90	.359	9.12	.193	4.90	.075	1.90
12-4	7/16 – 20	.4037	.3995	10.25	10.47	.193	4.90	.359	9.12	.193	4.90	.075	1.90
8-5	1/2 – 20	.4037	.3995	10.25	10.47	.255	6.48	.421	10.69	.193	4.90	.075	1.90
10-5	1/2 – 20	.4662	.4619	11.84	11.73	.255	6.48	.421	10.69	.193	4.90	.075	1.90
12-5	1/2 – 20	.4662	.4619	11.84	11.73	.255	6.48	.421	10.69	.193	4.90	.075	1.90
8-6	9/16 – 18	.5250	.5205	13.33	13.22	.318	8.08	.476	12.09	.198	5.02	.083	2.10
10-6	9/16 – 18	.5250	.5205	13.33	13.22	.318	8.08	.476	12.09	.198	5.02	.083	2.10
12-6	9/16 – 18	.5250	.5205	13.33	13.22	.318	8.08	.476	12.09	.198	5.02	.083	2.10
12-8	3/4 – 16	.7079	.7029	17.98	17.85	.426	10.82	.654	16.61	.253	6.40	.094	2.40

REVIEW ACTIVITIES:
USER ACTIVITIES

APPROVED 4 MAY 1967 REVISED (A) 9 MAY 80

P.A. ME Other Cust	TITLE TUBE- REDUCER : 37 DEGREE FLARE	MILITARY STANDARD MS39323(ME)
PROCUREMENT SPECIFICATIONS MIL- F-18866	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
47 30

REVIEW ACTIVITIES:
USER ACTIVITIES

TUBE-REDUCER: 37 DEGREE FLARE-INCHES AND MILLIMETERS (CONT)

DASH NO	I		L		W		D		X		S		O	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
	±.015	±.40	±.02	±.05	±.02	±.05	±.030	±.08	+.000 -.003	+.000 -.008	+.000 -.003	+ .000 .008	+.005 -.015	+ .13 - .40
6-4	550	14.00	.97	24.60	.17	4.32	.172	4.40	.502	12.750	.432	10.970	.441	11.20
8-4	550	14.00	1.00	25.40	.22	5.60	.172	4.40	.682	17.320	.562	14.270	.589	14.96
10-4	550	14.00	1.03	26.20	.23	5.80	.172	4.40	.797	20.240	.690	17.530	.705	17.90
12-4	550	14.00	1.09	27.60	.27	6.90	.172	4.40	.972	24.690	.826	20.980	.880	22.35
8-5	550	14.00	1.00	25.40	.22	5.60	.234	5.94	.682	17.320	.562	14.270	.589	14.96
10-5	550	14.00	1.03	26.20	.23	5.80	.234	5.94	.797	20.240	.690	17.530	.705	17.90
12-5	550	14.00	1.09	27.60	.27	6.90	.234	5.94	.972	24.690	.826	20.980	.880	22.35
8-6	556	14.12	1.00	25.40	.22	5.60	.297	7.54	.682	17.320	.562	14.270	.589	1496
10-6	556	14.12	1.03	26.20	.23	5.80	.297	7.54	.797	20.340	.690	17.530	.705	17.90
12-6	556	14.12	1.09	27.60	.27	6.90	.297	7.54	.972	24.690	.826	20.980	.880	22.35
12-8	657	16.70	1.19	30.20	.27	6.90	.391	9.90	.972	24.690	.826	20.980	.880	22.35

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/2417

APPROVED 4 MAY 1967 REVISED (A) 9 MAY 90

P.A. ME Other Cust	TITLE TUBE-REDUCER: 37 DEGREE FLARE	MILITARY STANDARD MS39323(ME)
PROCUREMENT SPECIFICATIONS MIL-F-18866	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 57 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.