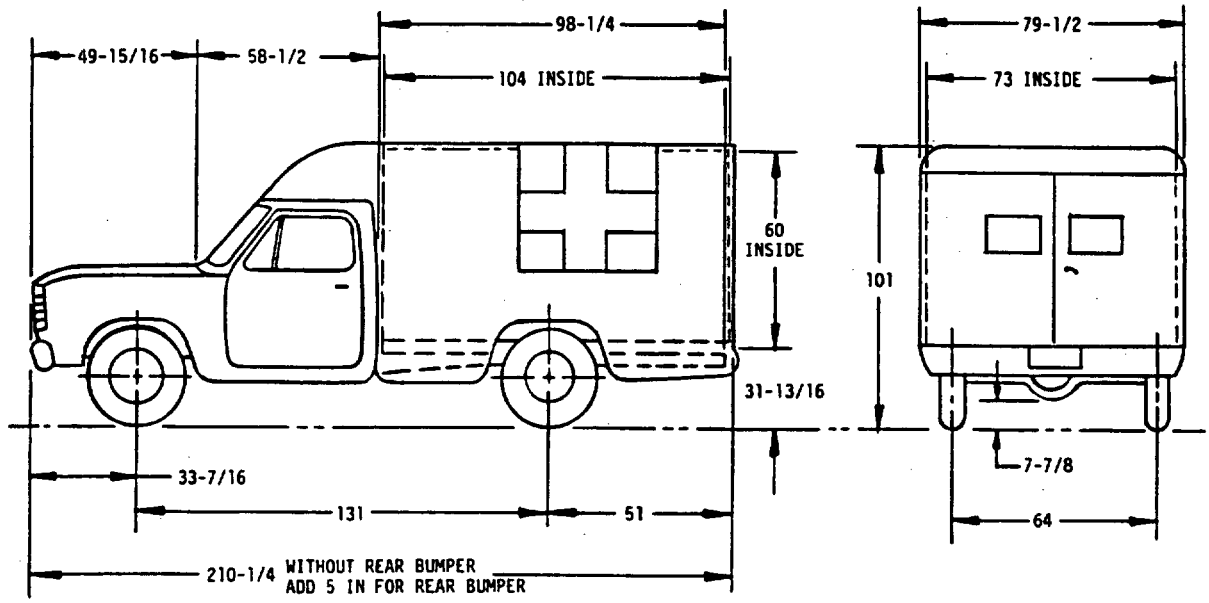


(B) INACTIVE FOR NEW DESIGN AFTER 10 OCTOBER 1989
FOR NEW DESIGN USE MS52206(AT).

INCHES	CM
5	12.7
7-7/8	20
31-15/16	80.8
33-7/16	84.9
49-15/16	126.8
51	129.5
58-1/2	148.6
60	152.4
64	162.6
73	185.4
79-1/2	201.9
98-1/4	249.6
101	256.5
104	264.2
131	332.7
210-1/4	534

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 26 Aug 1977 REVISED (A) 3 JUL 85 (B) 10 OCTOBER 1989

MS PART NO.	ENGINEERING DRAWING
MS52136-1	8736962

P. A. ARMY-AT	INTERNATIONAL INTEREST	TITLE	TRUCK, AMBULANCE, 1-1/4 TON, 131 IN. WHEEL BASE, M886 4x4 (COMMERCIAL)	MILITARY STANDARD MS52136(AT)
Other Cust				
PROCUREMENT SPECIFICATION MIL-T-62188	SUPERSEDES:			SHEET 1 OF 4

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

WEIGHTS:	
CURB	6116
PAYLOAD (INCLUDING TWO MAN CREW)	1600
GVWR	7716
DISTRIBUTION:	
EMPTY FRONT (CURB)	2930
EMPTY REAR (CURB)	3186
LOADED FRONT	3310
LOADED REAR	4406
TURNING RADIUS:	576 IN
DIMENSIONS:	
FRAME	6-3/16 X 2-5/16 X 3/16
FRAME, MAX SECTION MODULUS	3.88 IN^3
ENGINE:	
FUEL, GASOLINE	LEADED/ NON-LEADED
FUEL, OCTANE	83/91 (M/R) MIN
CYLINDERS	8
PISTON DISPLACEMENT	318.3 CU IN
BORE	3.91
STROKE	3.31
HORSEPOWER, NET AT 4000 RPM	150
MAX NET TORQUE AT 2400 RPM	230 LB FT
CARBURETOR:	8BD-2BBL
FUEL PUMP:	MS6449S
COOLING SYSTEM:	18 QTS
LUBRICATION SYSTEM:	
ENGINE OIL	5 QTS IN PAN
AXLES:	
FRONT LOAD RATING	3500 LBS
TYPE	FULL FLOAT
INPUT TORQUE	268 LB FT
OIL	4 PTS
REAR LOAD RATING	5500 LBS
TYPE	FULL FLOAT
INPUT TORQUE	365 LB FT
OIL	6 PTS
AXLE RATIO	4.10 TO 1
AXLE SHAFT	
MIN DIAMETER	1-3/16
SPLINE DIAMETER	1-5/16
SPRINGS:	
FRONT LOAD RATING	1550/1800 LBS
TYPE MULIT-LEAF SYMMETRICAL	
REAR LOAD RATING	2200/2450
TYPE MULIT-LEAF UNSYMMETRICAL	
SHOCK ABSORBERS: DOUBLE ACTION	1-3/8 IN DIA
WHEELS:	
TYPE	DROP CENTER RIM
RIM SIZE	16.5 X 6.75
TIRES: (TUBELESS)	
SIZE	9.50 X 16.5
TREAD DESIGN	ON & OFF HIGHWAY
PLY	8
BRAKES:	HYDRAULIC
FRONT	3-1/8 DISC
REAR	12 X 2-1/2 DRUM
LINING AREA FRONT &	41-11/16 SQ IN
REAR	122-11/16 SQ IN
LINING THICKNESS	
FRONT - OUTER 7/16	INNER 1/2
REAR - PRIMARY 3/16	SECONDARY 1/4

OIL FILTER:	
TYPE	FULL FLOW
CAPACITY	1 PT
FUEL SYSTEM:	
NUMBER OF TANKS	1
CAPACITY	20 GALS
LOCATION MID-SHIP INBOARD OF FRAME RAILS	
AIR CLEANER:	PAPER
TRANSMISSION:	AUTOMATIC
REDUCTIONS:	
FORWARD	2.54/1.45/1.00
REVERSE	2.00
INPUT TORQUE	615 LB FT
OIL	19 PTS
CONVERTER:	
SIZE	11-3/4 DIA
STALL RATIO	2.07
TRANSFER CASE:	
SPEEDS	2
REDUCTIONS	2.01/1.00
INPUT TORQUE:	
HIGH RANGE	2000 LB FT
LOW RANGE	1000 LB FT
OIL	9 PTS
PROPELLER SHAFTS:	
INPUT TORQUE	FRONT 1990 LB FT
	REAR 3330 LB FT
MASTER CYLINDER:	TANDEM
SIZE	1-1/8 X 1-5/16
WHEEL CYLINDER SIZE:	
FRONT	3-1/8
REAR	1
POWER BOOSTER:	TANDEM DIAPHRAGM 8-13/16 OD
PARKING BRAKE:	INTERNAL - EXPANDING
SIZE	12 X 2-1/2
ELECTRICAL:	12 VOLTS
GROUND	NEGATIVE
ALTERNATOR:	50 AMP
CAPACITY	55 AMPS @ 14 VOLTS
CAPACITY AT IDLE	34 AMPS
STARTER:	1-1/2 HP
VOLTAGE REGULATOR:	3 AMP
BATTERY:	80 AMP HR @20 HR RATE
DIRECTIONAL SIGNALS:	CLASS A
WINDSHIELD WIPER:	DUAL, ELECTRICAL 12 VOLT 2 SPEED
HORN:	ELECTRIC 12 VOLT
PINTLE HOOK:	8380199
BODY:	2000 LBS
FLOOR THICKNESS	1.615
FLOOR MATERIAL	0.040 ALUMINUM
	1.00 INSUL
	0.075 STEEL
	0.50 PLYWOOD
SEATING	5 LITTER PATIENTS

(B) INACTIVE FOR NEW DESIGN AFTER 10 OCTOBER 1989
FOR NEW DESIGN USE MS52206(AT).


APPROVED 26 Aug 1977 REVISED (A) 3 JUL 85 (B) 10 OCTOBER 1989

MS PART NO.	ENGINEERING DRAWING
MS52136-1	8736962

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRUCK, AMBULANCE, 1-1/4 TON, 131 IN. WHEEL BASE, M886 4x4 (COMMERCIAL)	MILITARY STANDARD MS52136(AT)
PROCUREMENT SPECIFICATION MIL-T-62188	SUPERSEDES:		SHEET 2 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

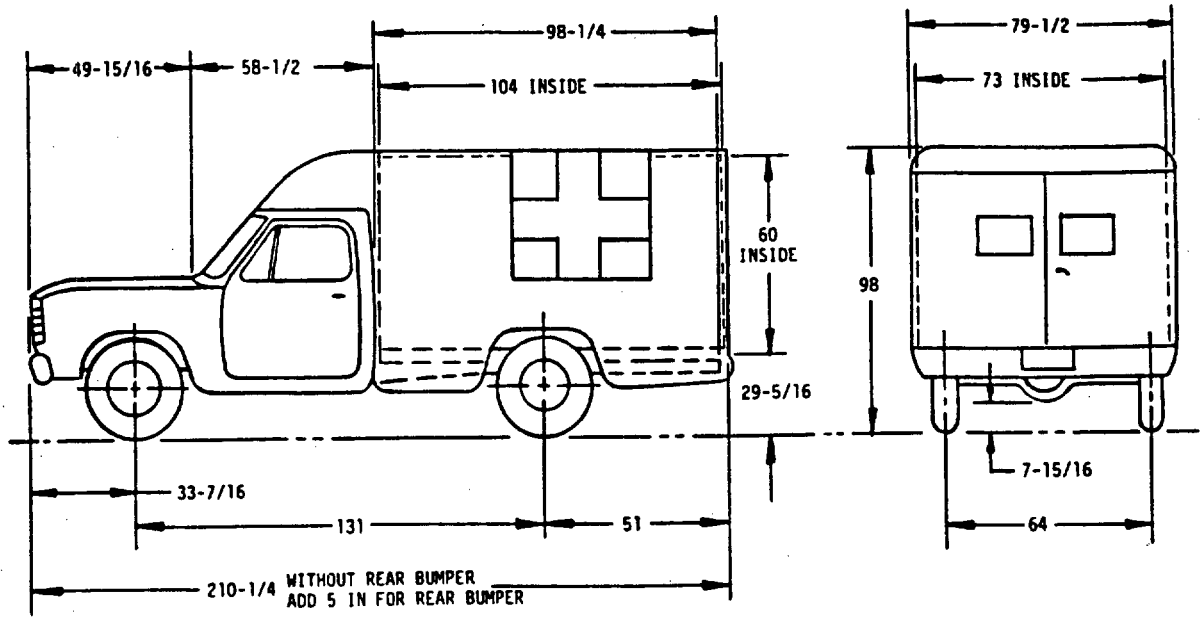

(B) INACTIVE FOR NEW DESIGN AFTER 10 OCTOBER 1989
FOR NEW DESIGN USE MS52206(AT).

INCHES	CM
5	12.7
7-7/8	20
29-5/16	74.5
33-7/16	84.9
49-5/16	126.8
51	129.5
58-1/2	148.6
60	152.4
64	162.6
73	185.4
79-1/2	201.9
98	248.9
98-1/4	249.6
104	264.2
131	332.7
210-1/4	534

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 26 Aug 1977
REVISED (A) 3 JUL 85 (B) 10 OCTOBER 1989

MS PART NO.	ENGINEERING DRAWING
MS52136-2	8736963

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: TRUCK, AMBULANCE, 1-1/4 TON, 131 IN. WHEEL BASE, M893 4x2 (COMMERCIAL)	MILITARY STANDARD MS52136(AT)
PROCUREMENT SPECIFICATION MIL-T-62188	SUPERSEDES:		SHEET 3 OF 4

USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

WEIGHTS:	
CURB	5684
PAYLOAD (INCLUDING TWO MAN CREW)	1600
GVWR	7284
DISTRIBUTION:	
EMPTY FRONT (CURB)	2565
EMPTY REAR (CURB)	3119
LOADED FRONT	2945
LOADED REAR	4339
TURNING RADIUS:	576 IN
DIMENSIONS:	
FRAME	6-3/16 X 2-5/16 X 3/16
FRAME, MAX SECTION MODULUS	3.88 IN^3
ENGINE:	
FUEL, GASOLINE	LEADED/NON-LEADED
FUEL, OCTANE	83/91 (M/R) MIN
CYLINDERS	8
PISTON DISPLACEMENT	318.3 CU IN
BORE	3.91
STROKE	3.31
HORSEPOWER, NET AT 4000 RPM	150
MAX NET TORQUE AT 2400 RPM	230 LB FT
CARBURETOR:	BBD-2BBL
FUEL PUMP:	MS6449S
AXLES:	
FRONT LOAD RATING	3300 LBS
TYPE; INDEPENDENT FRONT SUSPENSION	
INPUT TORQUE	268 LB FT
OIL	4 PTS
REAR LOAD RATING	5500 LBS
TYPE FULL FLOAT	
INPUT TORQUE CAPACITY	365 LB FT
OIL	6 PTS
AXLE RATIO	4.10 TO 1
AXLE SHAFT	
MIN DIAMETER	1-3/16
SPLINE DIAMETER	1-5/16
SPRINGS:	
FRONT TYPE COIL	
MODEL-3492935 MECHANICAL SPRING	
LOAD RATING	1475/1645 LBS
REAR TYPE MULTI-LEAF UNSYMMETRICAL	
LOAD RATING	2500/2725
SHOCK ABSORBERS:	
TYPE 1-3/8 IN DIA DOUBLE ACTION	
WHEELS:	
TYPE	DROP CENTER RIM
RIM SIZE	16.5 X 6.75
TIRES: (TUBELESS)	
SIZE	9.50 X 16.5
TREAD DESIGN	ON & OFF HIGHWAY
PLY RATING	8
BRAKES:	HYDRAULIC
FRONT	3-1/8 DISC
REAR	12 X 2-1/2 DRUM
LINING AREA FRONT &	41-11/16
REAR	122-11/16
LINING THICKNESS	
FRONT - OUTER 7/16	INNER 1/2
REAR - PRIMARY 3/16	SECONDARY 1/4

COOLING SYSTEM:	18 QTS
LUBRICATION SYSTEM:	
ENGINE OIL	5 QTS IN PAN
OIL FILTER:	
TYPE	FULL FLOW
CAPACITY	1 PINT
FUEL SYSTEM:	
NUMBER OF TANKS	1
CAPACITY	20 GALS
LOCATION MID-SHIP INBOARD OF FRAME RAILS	
AIR CLEANER:	PAPER
TRANSMISSION:	AUTOMATIC
REDUCTIONS:	
FORWARD	2.45/1.45/1.00
REVERSE	2.20
INPUT TORQUE CAPACITY	615 LB FT
OIL	19 PTS
CONVERTER:	
SIZE	11-3/4 DIA
STALL RATIO	2.07
MASTER CYLINDER:	TANDEM
SIZE	1-1/8 X 1-5/16
WHEEL CYLINDER SIZE:	
FRONT	3-1/8
REAR	1
PWR BOOSTER: TANDEM DIAPHRAGM 8-13/16 OD	
PARKING BRAKE:	
TYPE	INTERNAL - EXPANDING
SIZE	12 X 2-1/2
ELECTRICAL:	12 VOLTS
GROUND	NEGATIVE
ALTERNATOR:	50 AMP
CAPACITY	55 AMPS @ 14 VOLTS
CAPACITY AT IDLE	34 AMPS
STARTER:	1.5 H P
VOLTAGE REGULATOR:	3 AMP
BATTERY:	80 AMP HR @ 20 HR RATE
DIRECTIONAL SIGNALS:	CLASS A
WINDSHIELD WIPER:	DUAL, ELECTRIC 12 VOLT, 2 SPEED
HORN:	ELECTRIC 12 VOLT
PINTLE HOOK:	8380199
BODY:	2000 LBS
FLOOR THICKNESS	1.615
FLOOR MATERIAL	0.040 ALUMINUM
	1.00 INSUL
	0.075 STEEL
	0.50 PLYWOOD
SEATING	5 LITTER PATIENTS

(B) INACTIVE FOR NEW DESIGN AFTER 10 OCTOBER 1989
FOR NEW DESIGN USE MS52206(AT).

MS PART NO.	ENGINEERING DRAWING
MS52136-2	8736963

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, AMBULANCE, 1-1/4 TON, 131 IN. WHEEL BASE, M893 4x2 (COMMERCIAL)	MILITARY STANDARD MS52136(AT)
PROCUREMENT SPECIFICATION MIL-T-62188	SUPERSEDES:		SHEET 4 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
2320-A414

USER ACTIVITIES:
REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

10 OCTOBER 1989