INCH-POUND
MS75089D
W/AMENDMENT 1
27 August 2026
SUPERSEDING
MS75089D
7 September 2007


PERFORMANCE SPECIFICATION SHEET

COILS, RADIO FREQUENCY, MOLDED, FIXED, MICRO-MINIATURE, MAGNETICALLY SHIELDED, (FERRITE CORE – FERRITE SLEEVE), TYPES LT10K217 TO LT10K263, INCLUSIVE

Inactive for new design, after 4 September 1985.
For new design, use MIL-PRF-39010/3.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification and MIL-PRF-15305.

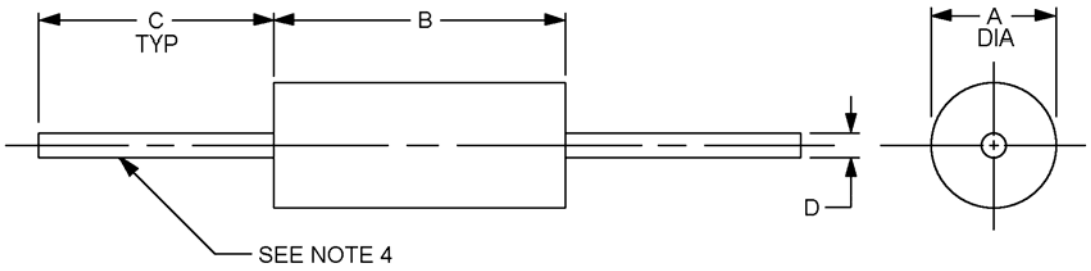

LTR	Dash numbers –01 through -47		Dash numbers –48 through -94	
	Dimensions in inches with metric Equivalents (mm) in parentheses		Dimensions in inches with metric Equivalents (mm) in parentheses	
	Minimum	Maximum	Minimum	Maximum
A	.152 (3.86)	.172 (4.37)	.152 (3.86)	.197 (5.00)
B	.390 (9.91)	.430 (10.92)	.390 (9.91)	.447 (11.35)
C	1.250 (31.75)	1.626 (41.30)	1.250 (31.75)	1.626 (41.30)
D	.023 (0.58)	.027 (0.69)	.023 (0.58)	.027 (0.69)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. These coils are intended to be supported by their bodies.
4. Solderable/weldable lead wire, number 22 AWG.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design, construction, and physical dimensions: See figure 1.

Style: LT10

Grade: 1
Class: A

Weight: 0.035274 ounce, maximum.

Operating temperature range: -55°C to +105°C.

Ambient temperature: +90°C ±5°C.

Temperature rise: 15 °C, maximum.

Terminal pull: 5 pounds, minimum

Altitude: 70,000 feet.

Shock (specified pulse): MIL-STD-202-213, test condition I, is applicable. Dielectric withstanding voltage:

At sea level: MIL-STD-202-301, test voltage 1,000 V rms for a minimum of 60 seconds.

At reduced barometric pressure: MIL-STD-202-301, test voltage of 200 V rms for a minimum of 60 seconds.

Barometric pressure (reduced): MIL-STD-202-105, test condition C, is applicable. Percent coupling: 3 percent, maximum.

Electrical characteristics: See table I and II.

Inductance: See table I.

Q values: See table I.

Self-resonant frequency (SRF): See table I.

DC resistance (DCR): See table I.

Part or Identifying Number (PIN): MS75089 - (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.

TABLE 1. Electrical characteristics (initial).

1/ Dash Number MS75089-	Superseded MS PIN	Inductance (μH) ±10%	Test Frequency (MHz)	Q (min)	SRF Min (MHz)	DC resistance (ohms)	Rated DC current (mA)	Incremental Current (mA)
01, 48	MS90537-27	15.0	2.5	45	49	.80	315	250
02, 49	MS90537-28	18.0	2.5	45	45	.89	300	235
03, 50	MS90537-29	22.0	2.5	45	41	.96	290	220
04, 51	MS90537-30	27.0	2.5	45	38	1.19	260	200
05, 52	MS90537-31	33.0	2.5	45	34	1.37	240	190
06, 53	MS90537-32	39.0	2.5	50	29	1.93	205	180
07, 54	MS90537-33	47.0	2.5	50	27	2.11	195	175
08, 55	MS90537-34	56.0	2.5	50	25	2.23	190	160
09, 56	MS90537-35	68.0	2.5	50	21	2.70	170	150
10, 57	MS90537-36	82.0	2.5	50	10.5	2.44	180	140
11, 58	MS90537-37	100.0	2.5	50	10.0	3.12	160	120
12, 59	MS90537-38	120.0	.79	55	9.7	3.60	150	95
13, 60	MS90537-39	150.0	.79	55	8.5	4.10	140	90
14, 61	MS90537-40	180.0	.79	55	8.0	4.40	135	85
15, 62	MS90537-41	220.0	.79	55	7.5	5.00	125	80
16, 63	MS90537-42	270.0	.79	55	7.0	5.80	115	70
17, 64	MS90537-43	330.0	.79	55	6.5	6.40	110	65
18, 65	MS90537-44	390.0	.79	60	6.2	7.40	105	60
19, 66	MS90537-45	470.0	.79	60	5.7	9.50	92	58
20, 67	MS90537-46	560.0	.79	60	4.7	10.5	90	55
21, 68	MS90537-47	680.0	.79	60	4.5	11.8	80	50
22, 69	MS90537-48	820.0	.79	60	4.2	13.0	80	45
23, 70	MS90537-49	1,000.0	.79	60	3.8	17.5	70	40
24, 71	MS90537-50	1,200.0	.25	45	1.5	22.1	60	35
25, 72	MS90537-51	1,500.0	.25	45	1.2	26.5	55	33
26, 73	MS90537-52	1,800.0	.25	45	1.0	29.9	50	30
27, 74	MS90537-53	2,200.0	.25	45	.97	33.8	50	27
28, 75	MS90537-54	2,700.0	.25	45	.92	47.3	40	25
29, 76	MS90537-55	3,300.0	.25	45	.84	53.0	40	22
30, 77	MS90537-56	3,900.0	.25	45	.80	73.8	35	20
31, 78	MS90537-57	4,700.0	.25	45	.74	81.6	31	19
32, 79	MS90537-58	5,600.0	.25	44	.73	98.9	28	17
33, 80	MS90537-59	6,800.0	.25	40	.66	111.0	27	16
34, 81	MS90537-60	8,200.0	.25	40	.54	119.0	26	15
35, 82	MS90537-61	10,000.0	.25	40	.47	137.0	24	14
36, 83	MS90537-62	12,000.0	.079	30	.33	143.0	23	13
37, 84	MS90537-63	15,000.0	.079	30	.29	157.0	22	12
38, 85	MS90537-64	18,000.0	.079	30	.28	225.0	21	10
39, 86	MS90537-65	22,000.0	.079	27	.25	274.0	17	9
40, 87	MS90537-66	27,000.0	.079	27	.21	308.0	16	8
41, 88	MS90537-67	33,000.0	.079	27	.19	343.0	15	7.5
42, 89	MS90537-68	39,000.0	.079	27	.17	376.0	15	6.0
43, 90	MS90537-69	47,000.0	.079	23	.16	473.0	13	5.5
44, 91	MS90537-70	56,000.0	.079	23	.14	512.0	13	5.0
45, 92	MS90537-71	68,000.0	.079	23	.13	580.0	12	4.0
46, 93	MS90537-72	82,000.0	.079	21	.12	618.0	11	3.5
47, 94	MS90537-73	100,000.0	.079	18	.11	678.0	11	3.0

1/ The coils specified herein are substitutes for the coils on MS90537, providing the small decrease in physical dimensions are not a factor. The decrease in maximum operating temperature from 125°C to 105°C does not downgrade these coils but assures satisfactory operation at 105°C for a minimum of 2,000 hours of life, rather than a shorter period of operation at 125°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics (final).

Inspection group	Allowable variation from Initial measurement		Allowable percent from specified minimum value in electrical characteristics (initial) table	
	Inductance (percent)	DC resistance	Self-resonant frequency	Q
Qualification inspection				
Group II	±5	---	---	-10
Group III	±10	±(5% +.001 ohm)	-15	-20
Group IV	±5	±(2% +.001 ohm)	-5	-20

Application notes:
1. After the overload test is performed, a period of 24 hours shall elapse prior to taking electrical characteristics (final) measurements.
2. DC resistance shall be the last measurement taken in the electrical characteristics test sequence.

Amendment notations. The margins of this specification are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. MIL-PRF-15305, MIL-STD-202-213, MIL-STD-202-301, MIL-STD-202-105

Custodians:
Army – CR
Navy - EC
Air Force - 11
DLA – CC

Preparing activity:
DLA – CC

Project: 5950-2026-028

Review activities:
Army – AR, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:28Z
Check the source to verify that this is the current version before use.