
FED. SUP CLASS
6140

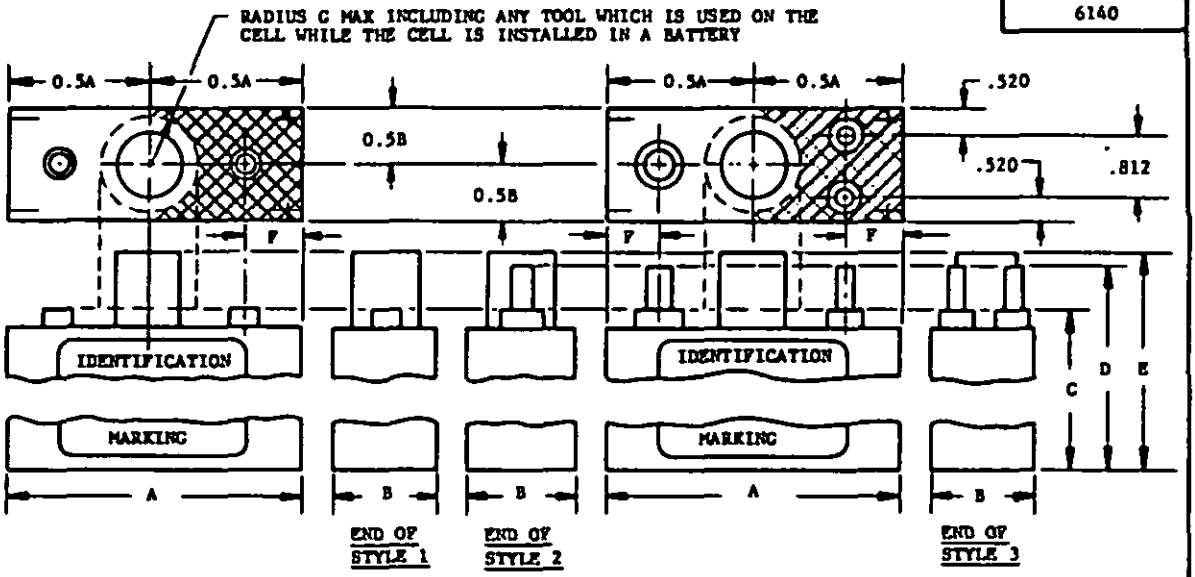

NOMINAL SIZE, NUMBER	A	B	C ±.027	SIZE OF TERMINALS	STYLE	D ±.045	E ±.030	F	G	VENTING PLUG MS3510	MAX WT, LBS
1	1.130	.660	2.022	6	2	2.205	2.235	.235	.305	-	.12
2	2.150	.640	3.688	10	2	3.880	3.940	.480	.234	-	.38
3	2.175	.960	3.660	1/4	2	3.994	4.015	.432	.399	-	0.7
4	2.302	.812	4.436	5/16	2	4.921	4.656	.471	.399	-	0.7
5W	2.090	.960	5.586	1/4	2	5.905	5.580	.389	-	-1	1.0
5R							6.179			-5	
6	2.302	.812	7.060	5/16	2	7.545	7.280	.471	.399	-	1.0
7W	2.740	1.195	4.355	8	1	-	4.715	.605	-	-2	1.3
7R							5.027			-7	
8W	2.414	1.075	6.525	8	1	-	6.910	.396	-	-2	1.3
8R							7.222			-7	
9	3.110	1.543	4.480	5/16	2	4.937	4.687	.618	.399	-	1.8
10	3.140	1.030	6.564	5/16	2	7.049	6.784	.445	.399	-	1.7
11W	3.120	1.660	5.135	10	1	-	5.450	.622	-	-2	2.0
11R							5.762			-7	
12W	3.175	1.070	7.869	10	1	-	8.200	.625	- -	-2	2.3
12R							8.512			-7	
13	3.250	1.265	6.625	7/16	2	7.130	6.845	.625	.500	-	1.8
14W	3.130	1.385	8.932	10	1	-	9.380	.540	-	-2	3.4
14R							9.592			-7	
15	2.812	1.852	8.937	3/8	3	9.432	9.157	.500	.500	-	4.0
16W	4.730	1.775	8.120	1/4	1	- -	8.560	1.113	-	-4	6.5
16R							8.997			-11	
17W	4.965	1.335	11.000	1/4	1	-	11.300	1.168	-	-3	6.5
17R							11.675			-9	

DIMENSIONS, VENTING PLUGS, AND MAXIMUM WEIGHTS

APPROVED 10 AUG 64 REVISED (P) 13 JUN 75 (R) 10 MARCH 80 (S) 24 Sept 82

(S) DENOTES CHANGES

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust	CELLS, BATTERY, STORAGE, LIGHT AND HEAVY DUTY, AIRCRAFT	MS90321(AS)
PROCUREMENT SPECIFICATION MIL-B-8565	SUPERSEDES:	SHEET 1 OF 5

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 6140-N581 PLATE NO. 23071

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and may be used by that activity. All other military activities are required to comply this standard when activated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6140

MS PART NUMBER	DUTY	DISCHARGE RATE	NOMINAL CAPACITY, AMPERE-HOURS	NOMINAL SIZE, NUMBER	COLOR OF POSITIVE END OF TOP	SUPERSEDES	INTENDED FOR USE IN (REF)
~~MS90321-59~~	~~LIGHT~~	~~-~~	~~11~~	~~4~~	~~GREEN~~		~~MS18045-35, -59~~
~~-60~~	~~"~~	~~"~~	~~16~~	~~6~~	~~"~~		~~-60~~
~~-61~~	~~"~~	~~"~~	~~27~~	~~10~~	~~"~~		~~-36, -61~~
~~-62~~	~~"~~	~~"~~	~~45~~	~~13~~	~~"~~		~~-37, -62~~
~~-63~~	~~"~~	~~"~~	~~67~~	~~15~~	~~"~~		~~-38, -63~~
~~-64~~	~~HEAVY~~	~~LOW~~	~~4 1/2~~	~~3~~	~~BLACK~~		~~-43, -64~~
~~-65W~~	~~"~~	~~"~~	~~7~~	~~5W~~	~~"~~	~~MS90321-65~~	~~-65~~
~~-65R~~				~~5R~~			
~~-66W~~	~~"~~	~~"~~	~~10~~	~~8W~~	~~"~~	~~-66~~	~~-44, -66~~
~~-66R~~				~~8R~~			
~~-67~~	~~"~~	~~"~~	~~14~~	~~9~~	~~"~~		~~-67~~
~~-68W~~	~~"~~	~~"~~	~~20~~	~~12W~~	~~"~~	~~-68~~	~~-45, -68~~
~~-68R~~				~~12R~~			
~~-69W~~	~~"~~	~~"~~	~~31~~	~~14W~~	~~"~~	~~-69~~	~~-48, -69~~
~~-69R~~				~~14R~~			
~~-70~~	~~"~~	~~HIGH~~	~~4~~	~~3~~	~~RED~~		~~-47, -70~~
~~-71W~~	~~"~~	~~"~~	~~6~~	~~5W~~	~~"~~	~~-71~~	~~-71~~
~~-71R~~				~~5R~~			
~~-72W~~	~~"~~	~~"~~	~~9~~	~~8W~~	~~"~~	~~-72~~	~~-48, -72~~
~~-72R~~				~~8R~~			
~~-73~~	~~"~~	~~"~~	~~13~~	~~9~~	~~"~~		~~-73~~
~~-74W~~	~~"~~	~~"~~	~~18~~	~~12W~~	~~"~~	~~-74~~	~~-49, -74~~
~~-74R~~				~~12R~~			
~~-75W~~	~~"~~	~~"~~	~~27~~	~~14W~~	~~"~~	~~-75~~	~~-50, -75~~
~~-75R~~				~~14R~~			
~~-76~~	~~LIGHT~~	~~-~~	~~40~~	~~13~~	~~"~~		~~MS18123-1~~
~~-77W~~	~~HEAVY~~	~~HIGH~~	~~16~~	~~12W~~	~~GREEN~~	~~-77~~	~~MS90365-1~~
~~-77R~~				~~12R~~			
~~-78W~~	~~"~~	~~"~~	~~16~~	~~12W~~	~~BROWN~~	~~-78~~	~~-2~~
~~-78R~~				~~12R~~			
(S) ~~-79W~~	~~"~~	~~"~~	16	~~12W~~	~~BLUE~~	~~-79~~	~~MS90377-1~~
~~-79R~~				~~12R~~			
-80W	"	LOW	54	17W	BLACK	-80	MS90378-2, -2, -6
-80R				17R			
~~-81W~~	~~"~~	~~HIGH~~	~~48~~	~~17W~~	~~RED~~	~~-81~~	~~4, 5, 7~~
~~-81R~~				~~17R~~			
~~-82W~~	~~"~~	~~LOW~~	~~54~~	~~16W~~	~~BLACK~~	~~-82~~	~~MS90379-2, -3, -6~~
~~-82R~~				~~16R~~			
~~-83W~~	~~"~~	~~HIGH~~	~~48~~	~~16W~~	~~RED~~	~~83~~	~~4, 5, 7~~
~~-83R~~				~~16R~~			
~~-84W~~	~~"~~	~~"~~	~~6~~	~~5W~~	~~GREEN~~	~~-84~~	~~MS90447-2~~
~~-84R~~				~~5R~~			
~~-85~~	~~LIGHT~~	~~-~~	~~11~~	~~4~~	~~RED~~		~~MS90449-1~~
-86	HEAVY	HIGH	3/4	1	"		MS3319-1
~~-87~~	~~"~~	~~"~~	~~2 1/2~~	~~3~~	~~"~~		~~MS3346-1~~
~~-88W~~	~~"~~	~~"~~	~~7 1/2~~	~~7W~~	~~"~~	~~-88~~	~~MS3375-1~~
~~-88R~~				~~7R~~			
~~-89W~~	~~"~~	~~"~~	~~18~~	~~11W~~	~~"~~	~~-89~~	~~MS3487-1~~
~~-89R~~				~~11R~~			

PART NUMBERS AND REQUIREMENTS FOR THEM

APPROVED 10 AUG 67 REVISED (S) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE CELLS, BATTERY, STORAGE, LIGHT AND HEAVY DUTY, AIRCRAFT	MILITARY STANDARD MS90321(AS)
PROCUREMENT SPECIFICATION MIL-B-8565	SUPERSEDES:	SHEET 2 OF 5

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 25071

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:34Z
Check the source to verify that this is the current version before use.

NOTES.-

1. DIMENSIONS. - THE DIMENSIONS OF EACH CELL SHALL BE AS SHOWN AND LISTED ON SHEET 1. ALL DIMENSIONS ARE IN INCHES. ALL TOLERANCES ARE ±1% UNLESS OTHERWISE SPECIFIED. THE CELL NEED CONFORM TO THE DIMENSIONS SHOWN AND LISTED ONLY WHEN DISCHARGED.

2. MS PART NUMBERS. - THE MS PART NUMBERS OF THE CELLS SHALL BE AS LISTED ON SHEET 2.

3. NOMINAL POTENTIAL. - THE NOMINAL POTENTIAL OF EACH LIGHT DUTY CELL SHALL BE 1.714 VOLTS. THE NOMINAL POTENTIAL OF EACH HEAVY DUTY CELL SHALL BE 1.263 VOLTS.

4. ELECTRIC CONNECTIONS. - EACH STYLE 1 CELL SHALL INCLUDE AS ITS ELECTRIC CONNECTIONS TWO TAPPED HOLES AS SHOWN ON SHEET 1 OF THE SIZE LISTED ON SHEET 1. EACH STYLE 2 CELL SHALL INCLUDE AS ITS ELECTRIC CONNECTIONS TWO THREADED POSTS AS SHOWN ON SHEET 1 OF THE SIZE LISTED ON SHEET 1. EACH STYLE 3 CELL SHALL INCLUDE AS ITS ELECTRIC CONNECTIONS FOUR THREADED POSTS AS SHOWN ON SHEET 1 OF THE SIZE LISTED ON SHEET 1 (TWO AT ONE END FOR THE NEGATIVE CONNECTION AND TWO AT THE OTHER END FOR THE POSITIVE CONNECTION). FRACTIONAL SIZES ARE FRACTIONS OF AN INCH NOMINAL. WHOLE NUMBERS ARE NOMINAL SIZES.

5. POLARITY MARKING. - THE AREA SHOWN SHADED ON SHEET 1 ON THE END OF THE TOP OF EACH CELL WHICH INCLUDES THE POSITIVE ELECTRIC CONNECTION(S) SHALL BE DURABLY FINISHED IN THE COLOR LISTED ON SHEET 2. THE REST OF THE TOP OF EACH CELL SHALL BE DURABLY FINISHED IN WHITE. THE POLARITY OF THE ELECTRIC CONNECTION(S) ON EACH END OF THE CELL SHALL BE MARKED ON THE FOUR CORNERS OF THE TOP OF EACH CELL AS SHOWN ON SHEET 1.

6. ELECTROLYTE ACCESS HOLE PLUG. - IF THE CELL INCLUDES AN ELECTROLYTE ACCESS HOLE WITH A REMOVABLE PLUG, IT SHALL BE ON THE TOP OF THE CELL, ON THE AXIS OF THE CELL, AS SHOWN ON SHEET 1, AND THE PLUG SHALL BE REMOVABLE AND INSTALLABLE BY USE OF STANDARD TOOLS ONLY, OR NO TOOLS. EACH CELL FOR WHICH A VENTING PLUG IS LISTED ON SHEET 1 SHALL INCLUDE SUCH A PLUG. PLUGS OF OTHER CELLS ARE OPTIONAL.

7. NOMINAL CAPACITY. - THE NOMINAL CAPACITY OF EACH CELL SHALL BE AS LISTED ON SHEET 2.

8. WEIGHT. - THE WEIGHT OF EACH CELL FILLED WITH ELECTROLYTE SHALL NOT EXCEED THE VALUE LISTED ON SHEET 1 IN ANY STATE OF CHARGE.

9. MARKING. - EACH CELL OF PART NUMBER FOR WHICH W AND R VARIANTS ARE CALLED OUT ON SHEET 2 SHALL BE MARKED MS90321- (WITH WHITE PLUG) OR MS90321- (WITH RED PLUG), WITH THE SUFFIXES OF THE W AND R VARIANTS FILLED IN.

10. SPECIFICATION. - THE CELLS CONFORM TO REQUIREMENTS OF MIL-B-8565 FOR CELLS MODIFIED AS FOLLOWS:

FOR ALL CELLS:

4.6.1 MOUNTING. - INSERT BEFORE THE NEXT-TO-LAST SENTENCE: "EACH CELL OF A PART NUMBER WHICH IS AN R VARIANT SHALL BE CLAMPED IN THE HOLDER BY A FLAT METAL PLATE LINED WITH A FLAT SHEET OF SPONGE ELASTOMER, WHICH SHALL MAKE AN AIRTIGHT SEAL ON THE TOP OF THE VENTING PLUG OF THE CELL." IN THE NEXT SENTENCE, REPLACE "THE CELL" WITH "EACH OTHER CELL". DIMENSION B SHALL BE THE THICKNESS OF THE CELL.

FOR MS90321-76 CELLS:

4.7.13 LIFE. - THE NUMBER OF CYCLES SHALL BE 30.

4.7.21 ALTITUDE. - THE PRESSURE SHALL BE 8.9 INCHES OF MERCURY (SIMULATING AN ALTITUDE OF 30,000 FEET) INSTEAD OF CONDITION C.

4.7.25 SPECIAL TESTS. - ADD:

4.7.25.1 STEP DISCHARGE. - THE BATTERY SHALL BE SUBJECTED TO A 30-SECOND DISCHARGE. THE CURRENT SHALL BE MAINTAINED AT THE VALUE LISTED BELOW, ±5%, FOR EACH PERIOD LISTED BELOW, ±5%, DURING THE DISCHARGE. THE POTENTIAL DURING EACH PERIOD OF THE DISCHARGE SHALL NOT BE LESS THAN THE VALUE LISTED BELOW.

PERIOD OF TIME, SECONDS	0-5	5-10	10-15	15-20	20-30
CURRENT, AMPERES	480	350	300	215	100
MINIMUM POTENTIAL, VOLTS	1.000	1.128	1.186	1.264	1.373

FOR MS90321-77 CELLS:

4.7.25 SPECIAL TESTS. - ADD:

4.7.25.1 STEP DISCHARGES. - THE BATTERY SHALL BE SUBJECTED TO THREE 15-SECOND DISCHARGES AND THEN A 30-SECOND DISCHARGE, WITH A 1-MINUTE REST PERIOD BETWEEN EACH TWO CONSECUTIVE DISCHARGES, ALL AT 0 F. THE CURRENT SHALL BE MAINTAINED AT THE VALUE LISTED BELOW FOR EACH DISCHARGE. THE POTENTIAL DURING EACH PERIOD OF EACH DISCHARGE SHALL NOT BE LESS THAN THE VALUE LISTED BELOW.

APPROVED 10 AUG 64 REVISED (S) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:34Z
Check the source to verify that this is the current version before use.

NOTES CONTD. -

	15-SECOND DISCHARGES				30-SECOND DISCHARGE
PERIOD OF TIME, SECONDS	0-5	5-10	10-15	15-20	20-30
CURRENT, AMPERES	480	405	355	295	225
MINIMUM POTENTIAL, VOLT	0.579	0.685	0.737	0.816	0.922

FOR MS90321-78 CELLS:
4.7.25 SPECIAL TESTS. - ADD:
4.7.25.1 STEP DISCHARGES. - THE BATTERY SHALL BE SUBJECTED TO THREE 23-SECOND DISCHARGES, WITH A 2-MINUTE REST PERIOD BETWEEN EACH TWO CONSECUTIVE DISCHARGES, ALL AT 0°F. THE CURRENT SHALL BE MAINTAINED AT THE VALUE LISTED BELOW FOR EACH PERIOD LISTED BELOW DURING EACH DISCHARGE. THE POTENTIAL DURING EACH PERIOD OF EACH DISCHARGE SHALL NOT BE LESS THAN THE VALUE LISTED BELOW.

PERIOD OF TIME, SECONDS	0-2	2-5	5-8	8-12	12-16	16-23
CURRENT, AMPERES	645	550	500	475	435	295
MINIMUM POTENTIAL, VOLT	0.368	0.405	0.437	0.447	0.458	0.584

FOR MS90321-79 CELLS:
4.7.13 LIFE. - THE NUMBER OF CYCLES SHALL BE 80.
4.7.25 SPECIAL TESTS. - ADD:
4.7.25.1 STEP DISCHARGE. - THE BATTERY SHALL BE SUBJECTED TO A 30-SECOND DISCHARGE. THE CURRENT SHALL BE MAINTAINED AT THE VALUE LISTED BELOW FOR EACH PERIOD LISTED BELOW DURING THE DISCHARGE. THE POTENTIAL SHALL NOT BE LESS THAN 0.737 VOLT AT ANY TIME DURING THE DISCHARGE.

PERIOD OF TIME, SECONDS	0-1	1-5	5-10	10-15	15-20	20-30
CURRENT, AMPERES	750	560	315	180	110	70

FOR MS90321-86 CELLS:
(S) TABLE 5 - TEST VALUES. - CHANGE "-22°F," IN TWO PLACES, TO "-10°F".
(S) 4.6.7.1 FOR THE LIFE TEST - REPLACE TEXT WITH: "FOR EACH CHARGE OF THE LIFE TEST, A POTENTIAL EQUIVALENT TO 1.50 ± 0.03 VDC PER CELL SHALL BE APPLIED ACROSS THE TERMINALS OF THE SERIES-CONNECTED CELL PACK. THE CHARGING SOURCE SHALL HAVE A CURRENT CAPACITY OF NOT LESS THAN 7.5 AMPERES.
(S) 4.7.16 ONE-HOUR DISCHARGE AT -22°F, CHANGE "-22°F," IN THE TITLE AND TEXT, TO "-10°F".
4.7.24 VIBRATION. - LIGHT AND HEAVY DUTY BATTERIES ONLY. - ADD TO FIRST SENTENCE: "EXCEPT THAT CURVE A SHALL BE CHANGED SO THAT THE PEAK ACCELERATION AT FREQUENCIES BETWEEN 5 AND 16 Hz SHALL BE ±0.5 g".
4.7.25 SPECIAL TESTS. - ADD:
4.7.25.1 1.3-HOUR DISCHARGE. - THE BATTERY SHALL BE SUBJECTED TO A 1.3-HOUR DISCHARGE WITH A CURRENT OF 0.62 AMPERE AND A MINIMUM POTENTIAL OF 0.947 VOLT.
4.7.25.2 FIVE-MINUTE DISCHARGE AT -10°F. - THE BATTERY SHALL BE SUBJECTED TO A 5-MINUTE DISCHARGE AT -10°F WITH A CURRENT OF 3.5 AMPERES AND A MINIMUM POTENTIAL OF 0.895 VOLT.
4.7.25.3 TEN-SECOND DISCHARGE AT -10°F. - THE BATTERY SHALL BE SUBJECTED TO A 10-SECOND DISCHARGE AT -10°F WITH A CURRENT OF 2.6 AMPERES AND A MINIMUM POTENTIAL OF 0.947 VOLT.
4.7.25.4 1.3-MINUTE DISCHARGES. - THE BATTERY SHALL BE SUBJECTED TO ELEVEN 1.3-MINUTE DISCHARGES, WITH A CURRENT OF 1.7 AMPERES AND A MINIMUM POTENTIAL OF 1.053 VOLTS, AND A 5-MINUTE REST PERIOD BETWEEN EACH TWO CONSECUTIVE DISCHARGES.
4.7.25.5 STEP DISCHARGE. - THE BATTERY SHALL BE SUBJECTED TO A 5.02-HOUR DISCHARGE AT -10°F. THE CURRENT SHALL BE MAINTAINED AT THE VALUE LISTED BELOW.

PERIOD OF TIME	FIRST 1 MINUTE	NEXT 3 SECONDS	NEXT 5 HOURS
CURRENT, AMPERES	1.7	6.5	0.15
MINIMUM POTENTIAL, VOLT	0.947	0.895	0.895

FOR MS90321-87 CELLS:
4.6.10 "EVALUATION OF EQUIPMENT" TEST. - REPLACE "A 45-MINUTE DISCHARGE" WITH "THE TEST OF 4.7.25.1"
4.7.22 MECHANICAL SHOCK. - THE SHOCKS WITH THE BATTERY IN THE ATTITUDE IN WHICH IT IS SHOWN ON SHEET 1 SHALL BE PERFORMED LAST AND THE BATTERY SHALL BE SUBJECTED TO THE TEST OF 4.7.25.1 SIMULTANEOUSLY WITH THESE SHOCKS, WITH THE SHOCKS OCCURRING DURING THE DISCHARGES.
4.7.25 SPECIAL TESTS. - ADD:
4.7.25.1 20-MILLISECOND DISCHARGES. - THE BATTERY SHALL BE SUBJECTED TO THREE 20-MILLISECOND DISCHARGES WITH A CURRENT OF 40 AMPERES AND A MINIMUM POTENTIAL OF 0.711 VOLT AND A 5-MINUTE REST PERIOD BETWEEN EACH TWO CONSECUTIVE DISCHARGES.
4.7.25.2 FORTY-DAY STAND. - THE BATTERY SHALL BE STORED FOR 40 ±1 DAYS AT 70 ±10°F AND SHALL THEN BE SUBJECTED TO THE TEST OF 4.7.25.1.
4.7.21 ALTITUDE. - REPLACE THE TEXT WITH: "THE BATTERY SHALL BE SUBJECTED TO THE ALTITUDE TEST PROCEDURE VI CONDITION C OF MIL-E-5272 EXCEPT THAT THE TEMPERATURE SHALL BE -40°F".

APPROVED 10 AUG 74 REVISED (S) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:34Z
Check the source to verify that this is the current version before use.

QUALIFICATION. - THIS REVISION DOES NOT AFFECT QUALIFICATION - ITEMS WHICH WERE QUALIFIED TO MS90321N REMAIN QUALIFIED TO MS90321P.

SUPERSESSION DATA

	PART NUMBER	SUPERSEDED BY
	MS90321-66	MS1757/1-1 AND MS1757/1-2
	MS90321-68	MS1757/1-3 AND MS1757/1-4
	MS90321-69	MS1757/1-5 AND MS1757/1-6
	MS90321-72	MS1757/1-1 AND MS1757/1-2
	MS90321-74	MS1757/1-3 AND MS1757/1-4
	MS90321-75	MS1757/1-5 AND MS1757/1-6
	MS90321-77	MS1757/1-3 AND MS1757/1-4
	MS90321-78	MS1757/1-3 AND MS1757/1-4
(S)	MS90321-79	MS1757/11-1 (BATTERY)
	MS90321-84	MS1757/10-1 (BATTERY)

ALL OTHER PART NUMBERS ELIMINATED IN THIS ISSUE ARE CANCELLED WITH NO SUPERSEDING DOCUMENT.

APPROVED 10 AUG 74 REVISED (S) FOR CHANGES SEE SHEETS 1, 2, 3, 4 AND 5

This standard has been approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by the activity. All other military activities are required to apply this standard where suitable.

P.A. NAVY - AS Other Cost	TITLE CELLS, BATTERY, STORAGE, LIGHT AND HEAVY DUTY AIRCRAFT	MILITARY STANDARD MS90321(AS)
PROCUREMENT SPECIFICATION MIL-B-8565	SUPERSEDES:	SHEET 5 OF 5

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 17709

☆U.S. GOVERNMENT PRINTING OFFICE: 1982-505-022/4814

Source: https://assist.dla.mil -- Downloaded: 2026-10-23120:342
Check the source to verify that this is the current version before use.