
FED. SUP CLASS
1660

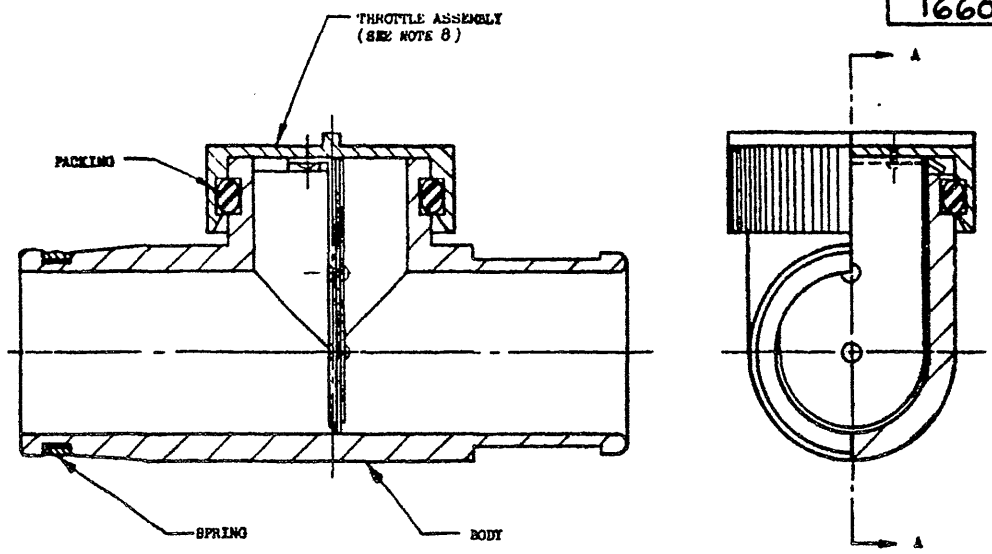


SECTION A-A

-1 ASSEMBLY

NOTES:

1. MATERIAL: BODY, ALUMINUM ALLOY CASTING, SPECIFICATION QQ-A-596, CLASS 8.
   BLADE, PLATE, ALUMINUM ALLOY, SPECIFICATION QQ-A-250/2B, CONDITION HALF HARD.
   KNOB, ALUMINUM ALLOY, SPECIFICATION QQ-A-267, CONDITION T4 OR SPECIFICATION QQ-A-268 CONDITION T4.
   SPRING, STEEL, SPECIFICATION MIL-S-7947, CONDITION 1 OR 2.
   INSERT, RUBBER, SPECIFICATION MIL-R-6855, CLASS II, GRADE 40.
   PACKING, RUBBER, SPECIFICATION MIL-R-6855, CLASS II, GRADE 70.
2. FINISH: BODY, PLATE, BLADE, KNOB, ANODIZE IN ACCORDANCE WITH SPECIFICATION MIL-A-8625, DYED SAGE GREEN.
   PRIOR TO ANODIZING, ALL EXTERNAL SURFACES OF THE BODY SHALL BE FINISHED 125 AND ALL MACHINED SURFACES SHALL BE FINISHED 63
   SPRING, CHROMIUM PLATE, SPECIFICATION QQ-C-320, CLASS 1, TYPE I.
3. INTERPRET DRAWING IN ACCORDANCE WITH STANDARDS PRESCRIBED BY SPECIFICATION MIL-D-70327.
4. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. HEAT TREATMENT: SPRING, HARDEN AND DRAW AT 750° F.
7. REMOVE ALL BURRS AND SHARP EDGES.
8. PRESS THROTTLE ASSEMBLY OVER MOUNTED "O" RING. GREASE "O" RING SLIGHTLY.
   THIS SHALL BE THE LAST STEP. (DISASSEMBLY IS ONLY POSSIBLE BY DESTROYING "O" RING).
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005, ANGLES ±1°.

Ⓐ DENOTES CHANGE

APPROVED 8 June 1964 REVISED Ⓐ 12 APRIL 1977

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


| P.A. NAVY-Wep | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust | Flow Control Assembly, Quick Disconnect, CWU-33/P ANTI-EXPOSURE SUIT | MS90326(Wep) |
| PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 1 OF 3 |

DD FORM 672-1 (Listed coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 14934

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1660

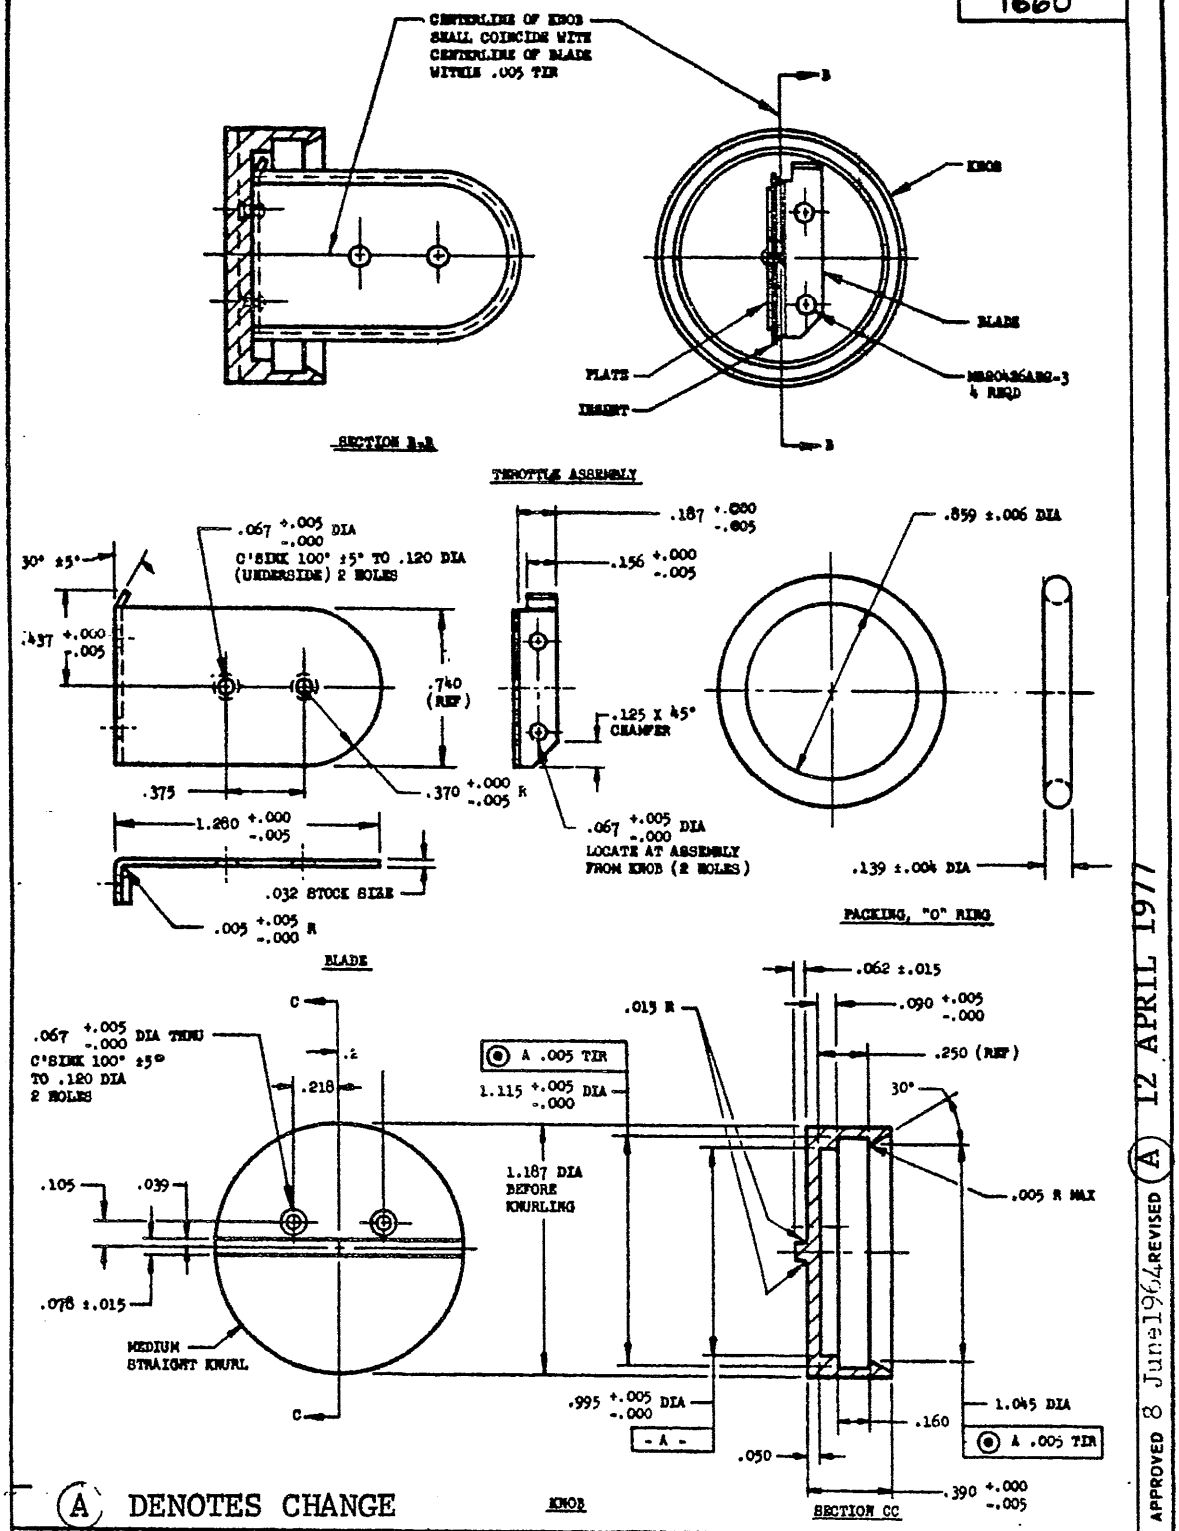


(A) DENOTES CHANGE

APPROVED 8 June 1964 REVISED (A) 12 APRIL 1977

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


| | | |
|---|---|---|
| P A. NAVY-Wepa<br>Other Cust | TITLE<br>Flow Control Assembly, Quick Disconnect,<br>CWU-33/P ANTI-EXPOSURE SUIT | MILITARY STANDARD<br>MS 90326(Wep) |
| PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 2 OF 3 |

DD FORM 1 SEP 61 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:34Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1660

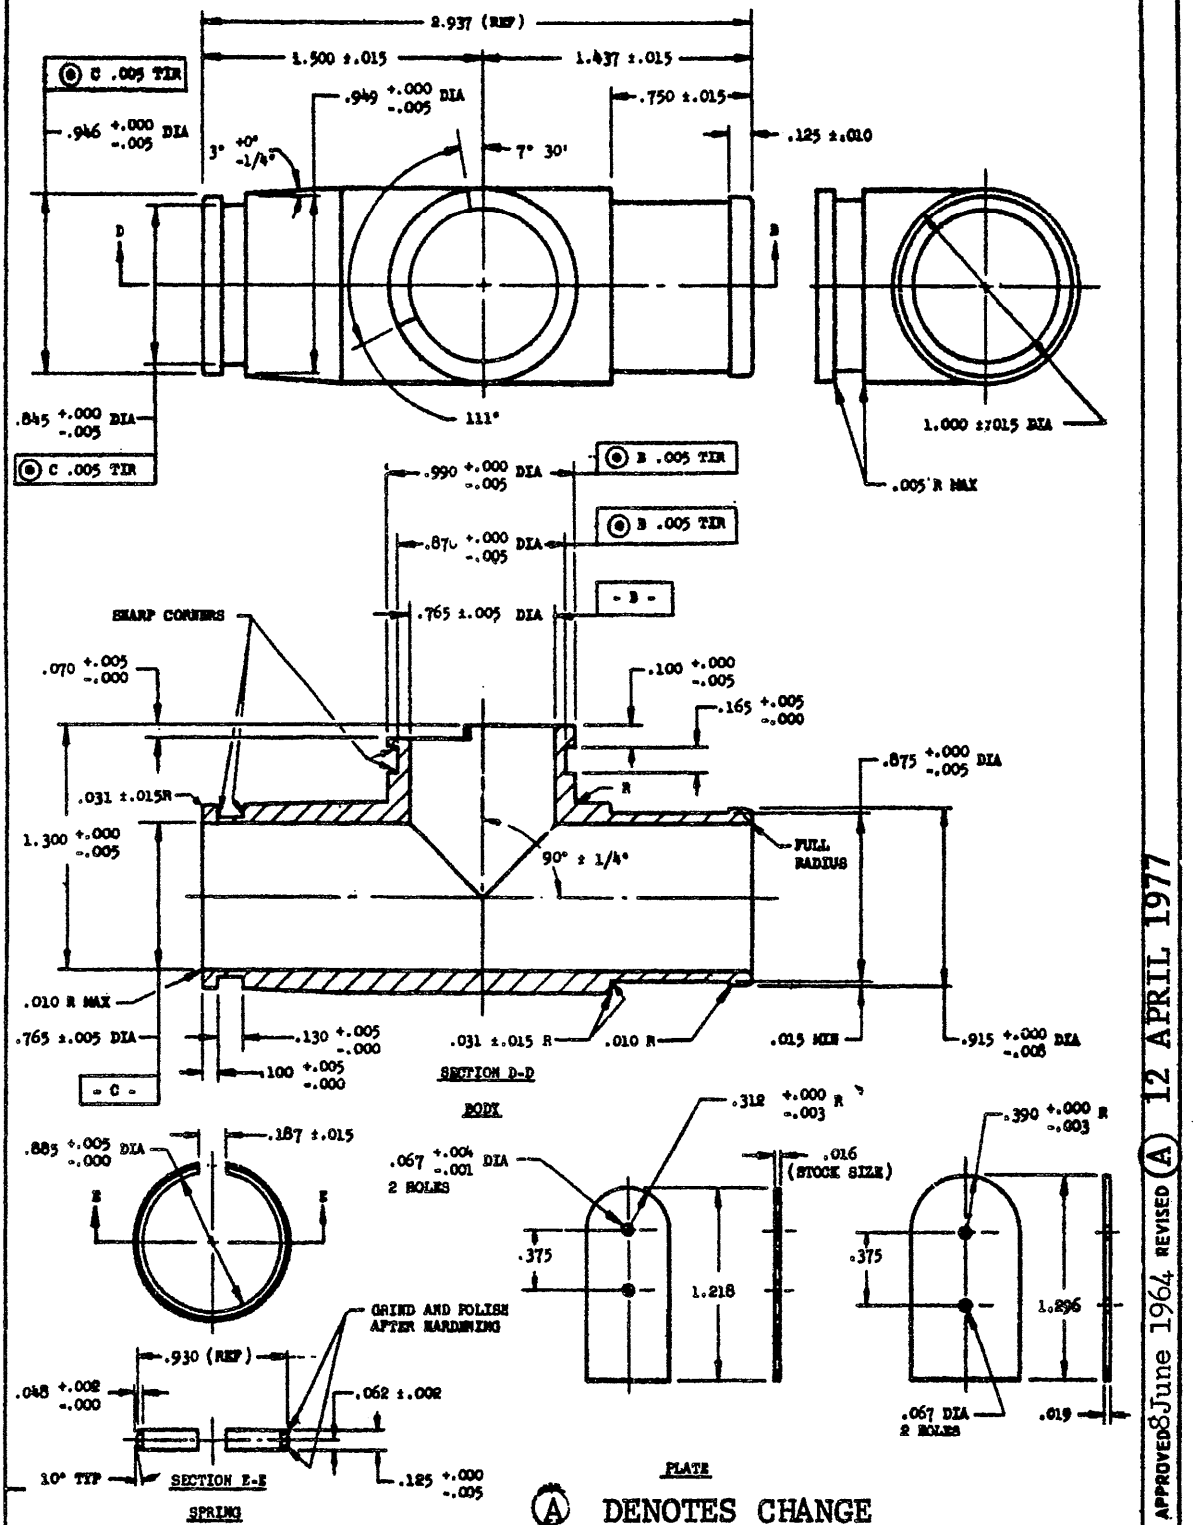


Ⓐ DENOTES CHANGE

APPROVED 8 June 1964 REVISED Ⓐ 12 APRIL 1977

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by the activity. All other military activities are required to employ this standard when available.

| | | |
|---|---|---|
| P.A. NAVY-Weps<br>Other Cust | TITLE<br>Flow Control Assembly, Quick Disconnect,<br>CWU-33/P ANTI-EXPOSURE SUIT | MILITARY STANDARD<br>MS 90326(Wep) |
| PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 3 OF 3 |

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PAGE 1 of 1 PAGES

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-0 20/3399

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:34Z
Check the source to verify that this is the current version before use.