INCH-POUND

MIL-DTL-3661/48C
29 April 2019


SUPERSEDING
MIL-L-3661/48B
17 September 1973


DETAIL SPECIFICATION SHEET

HOUSINGS, INDICATOR-LIGHT, STYLE LH90

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

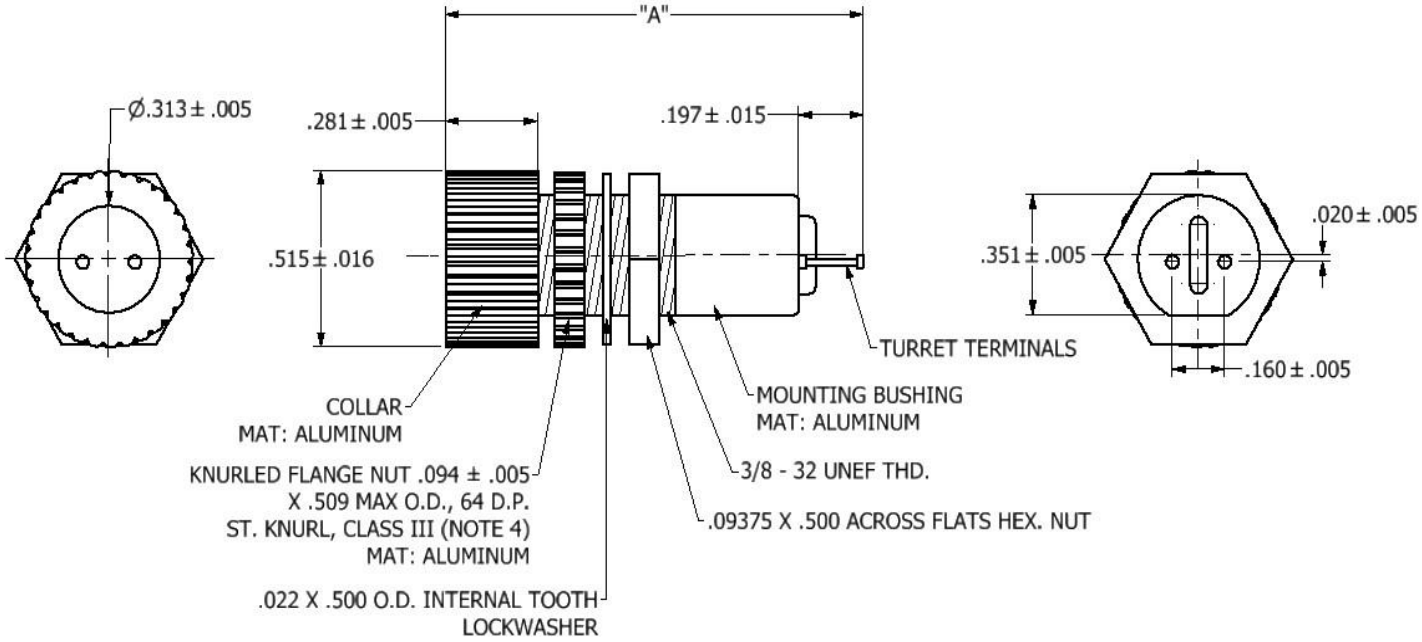

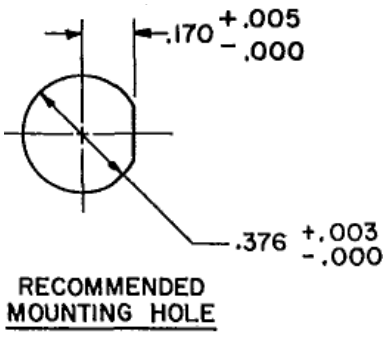

inches	mm
.005	.13
.015	.38
.020	.51
.022	.56
.09375	2.38
.094	2.39
.160	4.06
.170	4.32
.197	5.00

inches	mm
.28125	7.14
.313	7.95
.351	8.92
.375	9.53
.376	9.55
.500	12.70
.509	12.93
.51562	13.10

FIGURE 1. Design and construction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:04Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± .015 inch.
2. Metric equivalents (to the nearest .01mm) are given for general information only and are based upon 1 inch=25.4 mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.
4. Knurls shall be in accordance with ASME B94.6.

REQUIREMENTS:

1. Design and construction: See figure 1 and table II.
2. Terminal plating: Gold (thickness shall be 50 millionths inch (0.001270 mm) minimum over a nickel undercoat).

FIRST ARTICLE INSPECTION

Group submission: Sample units shall be used unless specified on the contract.

TABLE I. Inspections.

Type designation	Tests MIL-DTL-3661	Extent of approval
LH90/2 or LH90/3 As applicable	(12 sample units) All tests of table IV	ALL
LH90/1	(2 sample units) (Group I of table IV Visual and mechanical Examinations only)	

TABLE II. Dimensions and mating components.

Type designation	"A" dimension (maximum)	"A" dimension mm	Mating lens	Lamp accommodation
LH90/1	$1\frac{9}{32}$	32.54	N/A	Cylindrical plug-in lamp cartridge MS18235, MS18236 and MS18237
LH90/2[1]	$1\frac{9}{32}$	32.54	LC30[2] and LC32[3]	Cylindrical plug-in lamp cartridge MS18235
LH90/3[1]	$1\frac{15}{32}$	37.31	LC30[2]	Cylindrical plug-in lamp cartridge MS18238

[1] No collar shall be furnished.
[2] In accordance with MIL-L-3661/30.
[3] In accordance with MIL-L-3661/32.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:04Z
Check the source to verify that this is the current version before use.

REFERENCED DOCUMENTS. In addition to MIL-DTL-3661, this document references the following:
ASME 94.6
MIL-L-3661/30
MIL-L-3661/32
MS18235
MS18236
MS18237
MS18238

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army – CR
Navy – AS
DLA – GS

Preparing activity:
DLA – GS2
(Project 6210-2019-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:04Z
Check the source to verify that this is the current version before use.