
MILITARY SPECIFICATION SHEET

Ⓑ LAMPHOLDER, LENSES, INDICATOR LIGHT, STYLE LC41

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the lenses described herein shall consist of this document and the latest issue of MIL-L-3661.

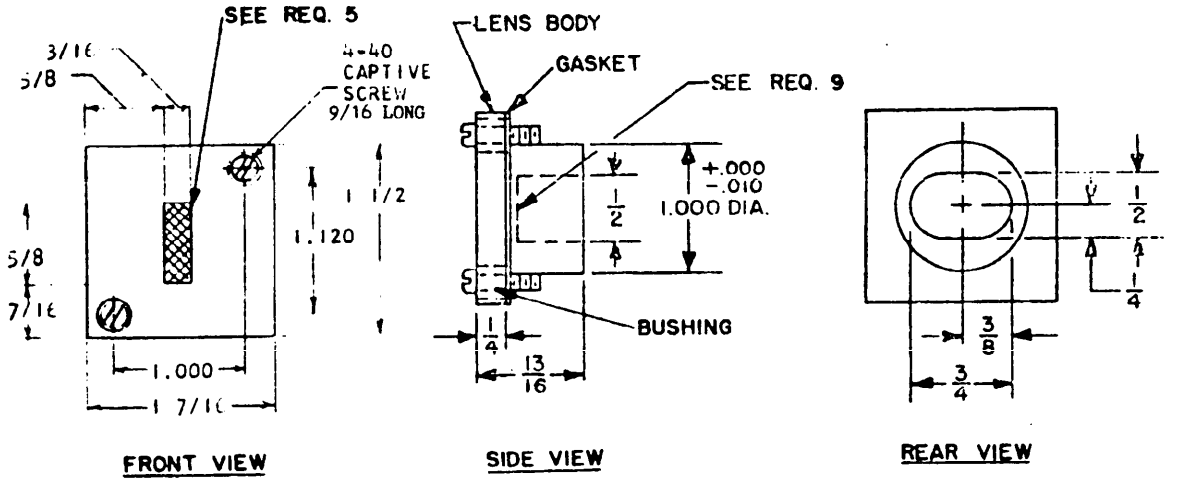

FRONT VIEW SIDE VIEW REAR VIEW

SH 9408A

Inches	mm	Inches	mm
0.010	0.25		
3/16	4.76	13/16	20.64
1/4	6.35	1.000	25.40
		1.120	28.45
3/8	9.53	1-7/16	36.51
		1-1/2	38.10
7/16	11.11		
1/2	12.70		
9/16	14.29		
5/8	15.88		
3/4	19.05		

FIGURE 1. Style LC41 lenses.

Ⓑ NOTES:
1. Dimensions in inches. Unless otherwise specified, tolerances are plus or minus 1/64 inch (0.38 mm) for fractions and plus or minus 0.015 inch (0.38 mm) for decimals.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓑ denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. **Qualification:** Not required.
2. **Material:**

   (a) Lens body: Material for the lens body for each type designation shall be as shown in table I and as follows:
   (1) Red: Transparent, heat-resistant acrylic plastic having a 90 ± 5 percent light transmission in the range of 590 to 700 nanometers(nm) wavelength.
   (2) Blue: Transparent, heat-resistant acrylic plastic having 50 ± 5 percent light transmission in the range of 425 to 475 nm wavelength.
   (3) Green: Transparent, heat-resistant acrylic plastic having 40 ± 5 percent light transmission in the range of 475 to 550 nm wavelength.
   (4) Yellow: Transparent, heat-resistant acrylic plastic having 90 ± 5 percent light transmission in the range of 525 to 700 nm wavelength.
   (5) White: Translucent, heat-resistant acrylic plastic having a 66.5 ± 5 percent light transmission in 1/8 inch thickness.
   (6) Colorless: Transparent, heat-resistant acrylic plastic having 95 ± 5 percent light transmission in the range of 400 to 690 nm wavelength.
   (b) Gasket: Rubber.
   (c) Screw: Corrosion resistant steel.
   (d) Bushing: Brass.

3. Design and construction: See figure 1.
4. Finish: Exterior surfaces, except crosshatched areas and the cavity on the back side of the lens, shall be painted white 0.004 inch (0.09 mm) to 0.006 inch (0.14 mm) thick followed by a coat of gray paint 0.002 inch (0.05 mm) to 0.005 inch (0.13 mm) thick. The paint on the outside of the lens shall be capable of withstanding the surface endurance test specified herein.
5. Lens face color shall be exposed in crosshatched area. Paint shall not be permitted in this area.
6. Sealing: Dripproof.
7. Temperature cycling: Minus 55°C to plus 125°C.
8. Shock: Method II.
9. Paint shall not be permitted on inside of cap.
10. Marking: The following marking shall appear on the back side of each lens:

    (a) MIL-L-3661/55.
    (b) Type designation.
    (c) Manufacturer's name or trademark.

TABLE I. Style LC41 lenses.

Type designation 1/	Lens material	Transmittance	Lens color	Requirement
LC41RN3	Plastic	Transparent	Red	2(a) (1)
LC41BN3	Plastic	Transparent	Blue	2(a) (2)
LC41GN3	Plastic	Transparent	Green	2(a) (3)
LC41YN3	Plastic	Transparent	Yellow	2(a) (4)
LC41WT3	Plastic	Translucent	White	2(a) (5)
LC41CN3	Plastic	Transparent	Colorless	2(a) (6)

1/ The style LC41 lenses shall mate with any of the indicator light housings shown on MIL-L-3661/61 through MIL-L-3661/65.

Supersession data: This specification sheet replaces style 1 of MS17140 for new design only. Not interchangeable with MS17140.

QUALITY ASSURANCE PROVISIONS

First article inspection:

Complete lampholder assembly: When lenses specified herein are acquired as a part of an assembly, the lenses with the indicator light housing shall be subjected to the applicable tests listed in the qualification tests of MIL-L-3661. The transmission and surface endurance tests specified herein shall also be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:06Z
Check the source to verify that this is the current version before use.

Lenses: When lenses are acquired separately, first article inspection shall consist of the following examination and tests:

(a) Visual and dimensional examination.
(b) Sealing.
(c) Transmittance (as specified herein).
(d) Temperature cycling.
(e) Surface endurance (as specified herein).

Quality conformance inspection: When lenses are acquired separately, quality conformance inspection shall consist of the following:

(a) Visual and dimensional examination.
(b) Sealing.

Sampling for quality conformance inspection. A random sample of lenses shall be selected from each lot in accordance with MIL-STD-105, inspection level I. The AQL shall be 2.5 percent defective. Any lens in the sample containing one or more defects or failing to conform to the sealing test shall be rejected. If the number of nonconforming lenses in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Tests:

Transmission: The transmission test to determine conformance with requirement 2(a) shall be conducted in accordance with MIL-C-25050.

Surface endurance: The apparatus shall consist of a device which will apply a vertical load of 1.000 grams to the point of a needle held at an angle of 45 degrees to the horizontal. The apparatus shall hold the lens in a horizontal position and shall allow the entire length of the lens to pass horizontally under the needle in a rapid manner. The line scratched on the lens shall lie in the vertical plane containing the axis of the needle. The direction of movement of the lens relative to the needle shall be in the direction of the point. Figure 2 shows the general form of the equipment. The steel needle shall have a right conical point having a vertex angle of 16 to 20 degrees and a spherical tip with a radius of 0.002 to 0.0025 inch. A needle may be used for only one pass unless it is carefully checked to insure that its dimensions are within the limits indicated in figure 2. The test shall consist of one pass of the needle on the front surface of the lens and one pass along the longest side of the lens, and shall not break the surface so as to cause light leakage from the lens or distortion of any marking.

Preparing activity:
Navy - SH
(Project 6210-N514)

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:06Z
Check the source to verify that this is the current version before use.

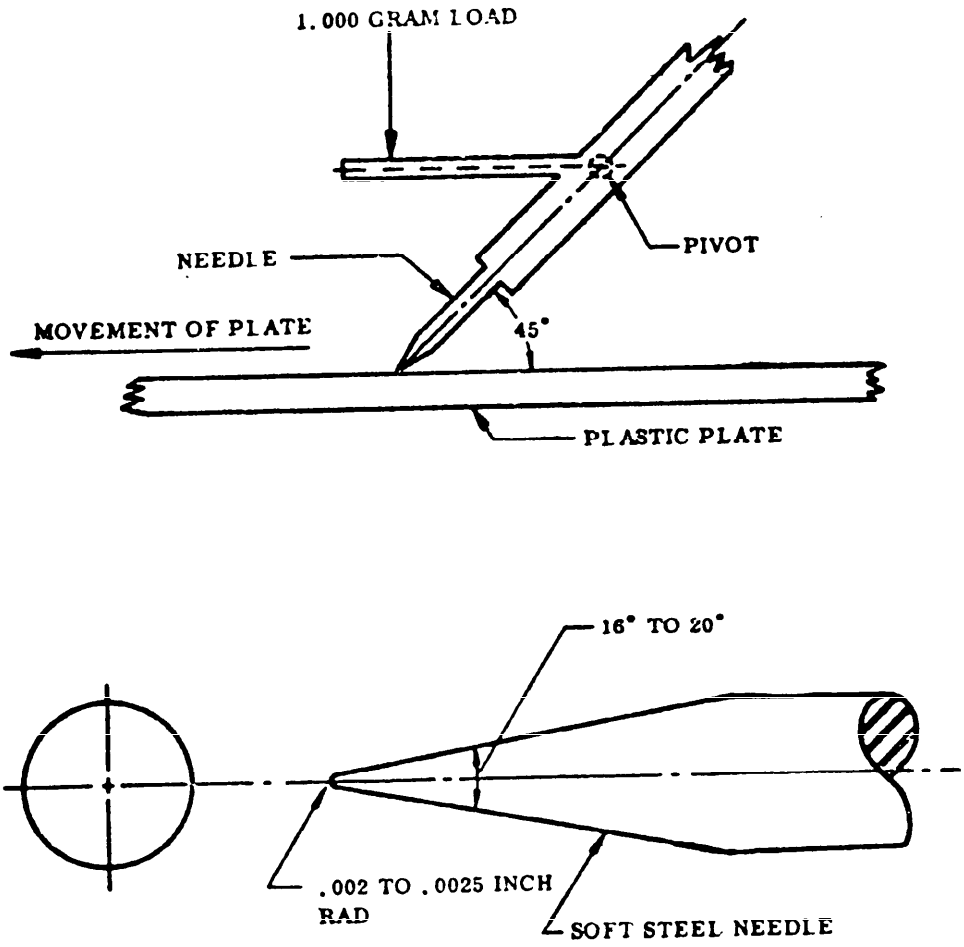


FIGURE 2. Surface endurance test apparatus.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Sea Systems Command (SEA 55z3)
DOD Standardization Program and Documents Division
Department of the Navy
Washington, DC 20362

Source: https://assist.dla.mil -- Downloaded: 202640-16T21:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:06Z
Check the source to verify that this is the current version before use.