
MILITARY SPECIFICATION SHEET

Ⓑ LAMPHOLDER, LENSES, INDICATOR LIGHT, STYLE LC43

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the lenses described herein shall consist of this document and the latest issue of MIL-L-3661.

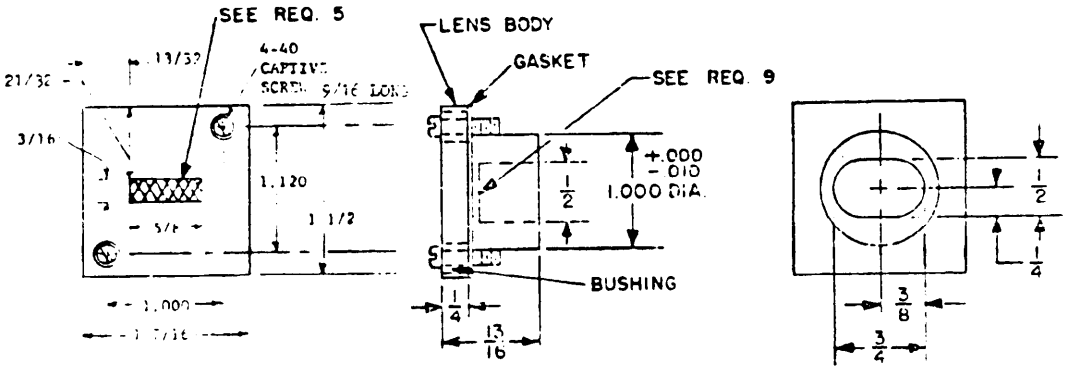

SH 9410A

FRONT VIEW SIDE VIEW REAR VIEW

Inches	mm	Inches	mm
0.010	0.25		
3/16	4.76	13/16	20.64
1/4	6.35	31/32	24.61
3/8	9.53	1.000	25.40
13/32	10.32	1.120	28.45
9/16	14.29	1-7/16	36.51
1/2	12.70	1-1/2	38.10
5/8	15.88		
3/4	19.05		

FIGURE 1. Style LC43 lenses.

NOTES:
Ⓑ 1. Dimensions are in inches. Unless otherwise specified, tolerances plus or minus 1/64 inch (0.38 mm) for fractions and plus or minus 0.015 inch (0.38 mm) for decimals.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓑ denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 20260-16T21:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Qualification: Not required.
(E) 2. Material:

(a) Lens body: Material for lens body for each type designation shall be as specified in table I and as follows:
(1) Red: Transparent, heat-resistant acrylic plastic having 90 ± 5 percent light transmission in the range of 590 to 700 nanometers (nm) wavelength.
(2) Blue: Transparent, heat-resistant acrylic plastic having 50 ± 5 percent light transmission in the range of 425 to 475 nm wavelength.
(3) Green: Transparent, heat-resistant acrylic plastic having 40 ± 5 percent light transmission in the range of 475 to 550 nm wavelength.
(4) Yellow: Transparent, heat-resistant acrylic plastic having 90 ± 5 percent light transmission in the range of 525 to 700 nm wavelength.
(5) White: Translucent, heat-resistant acrylic plastic having 66.5 ± 5 percent light transmission in 1/8 inch thickness.
(6) Colorless: Transparent, heat-resistant acrylic plastic having 95 ± 5 percent light transmission in the range of 400 to 690 nm wavelength.
(b) Gasket: Rubber.
(c) Screw: Corrosion resisting steel.
(d) Bushing: Brass.

3. Design and construction: See figure 1.
(E) 4. Finish: Exterior surfaces except crosshatched area and the cavity on the back side of the lens shall be painted white 0.004 inch (0.09 mm) to 0.006 inch (0.14 mm) thick, followed by a coat of gray paint 0.002 inch (0.05 mm) to 0.005 inch (0.13 mm) thick. The paint on the outside of the lens shall be capable of withstanding the surface endurance test specified herein.
5. Lens face color shall be exposed in the crosshatched area. Paint shall not be permitted in this area.
6. Sealing: Dripproof.
7. Temperature cycling: Minus 55°C to plus 125°C.
8. Shock: Method II.
9. Paint shall not be permitted on inside of cap.
10. Marking: The following marking shall appear on the back side of the lens:

(a) MIL-L-3661/57.
(b) Type designation.
(c) Manufacturer's name or trademark.

TABLE I. Style LC43 lenses.

Type designation 1/	Lens material	Transmittance	Lens color	Requirement
LC43RN3	Plastic	Transparent	Red	2(a)(1)
LC43BN3	Plastic	Transparent	Blue	2(a)(2)
LC43GN3	Plastic	Transparent	Green	2(a)(3)
LC43YN3	Plastic	Transparent	Yellow	2(a)(4)
LC43WT3	Plastic	Translucent	White	2(a)(5)
LC43CN3	Plastic	Transparent	Colorless	2(a)(6)

1/ Style LC43 lenses shall mate with any of the indicator light housings shown on MIL-L-3661/61 through MIL-L-3661/65.

(E) Supersession data: This specification sheet replaces style 2 of MS17140 for new design only. Not interchangeable with MS17140.

QUALITY ASSURANCE PROVISIONS

First article inspection:

Complete lampholder assembly: When lenses specified herein are acquired as a part of an assembly, the lenses with the indicator light housing shall be subjected to the applicable tests listed in the qualification tests of MIL-L-3661. The transmission and surface endurance tests specified herein will also be required.

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:07Z
Check the source to verify that this is the current version before use.

Lenses: When lenses are acquired separately, first article inspection shall consist of the following examination and tests:

(a) Visual and dimensional examination.
(b) Sealing.
(c) Transmittance (as specified herein).
(d) Temperature cycling.
(e) Surface endurance (as specified herein).

Quality conformance inspection: When lenses are acquired separately, quality conformance inspection shall consist of the following:

(a) Visual and dimensional examination.
(b) Sealing.

Sampling for quality conformance inspection. A random sample of lenses shall be selected from each lot in accordance with MIL-STD-105, inspection level I. The AQL shall be 2.5 percent defective. Any lens in the sample containing one or more defects or failing to conform to the sealing test shall be rejected. If the number of nonconforming lenses in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Tests:

Transmission. The transmission test to determine conformance with requirement 2(a) shall be conducted in accordance with MIL-C-25050.

Surface endurance: The apparatus shall consist of a device which will apply a vertical load of 1,000 grams to the point of a needle held at an angel of 45 degrees to the horizontal. The apparatus shall hold the lens in a horizontal position and shall allow the entire length of the lens to pass horizontally under the needle in a rapid manner. The line scratched on the lens shall lie in the vertical plane containing the axis of the needle. The direction of movement of the lens relative to the needle shall be in the direction of the point. Figure 2 shows the general form of the equipment. The steel needle shall have a right conical point having a vertex angle of 15 to 20 degrees and a spherical tip with a radius of 0.002 to 0.0025 inch. A needle may be used for only one pass unless it is carefully checked to insure that its dimensions are within the limits indicated in figure 2. The test shall consist of one pass of the needle on the front surface of the lens and one pass along the longest side of the lens, and shall not break the surface so as to cause light leakage from the lens or distortion of any marking.

Preparing activity:
Navy - SH
(Project 6210-N516)

Source: https://assist.dla.mil -- Downloaded: 20261010-16T21:07Z
Check the source to verify that this is the current version before use.

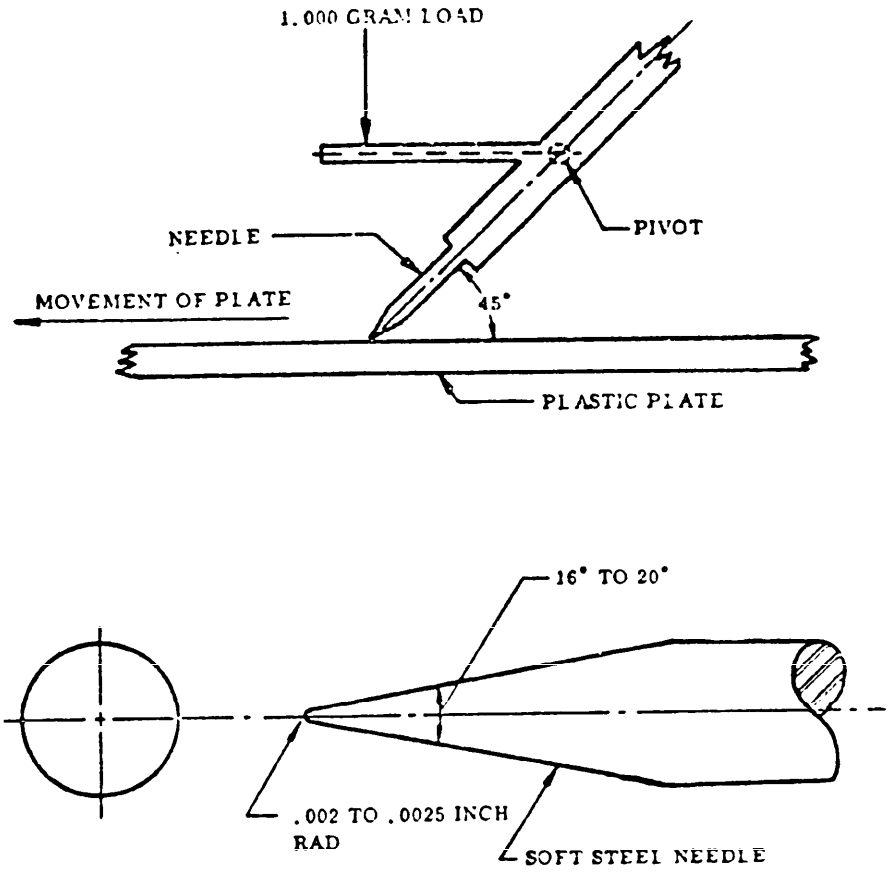


FIGURE 2. Surface endurance test apparatus.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:07Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
Naval Ship Engineering Center (SEC 6124C)
Department of the Navy
Washington, DC 20362

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-L-3661/57B(SH)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)

TELEPHONE NO

DATE

DD FORM 1426 REVISED

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-16T21:07Z
Check the source to verify that this is the current version before use.