

MILITARY SPECIFICATION SHEET

ADAPTER, MOUNTING, INDICATOR LIGHT

The complete requirements for procuring the mounting adapter described herein shall consist of this document and the latest issue of MIL-L-3661

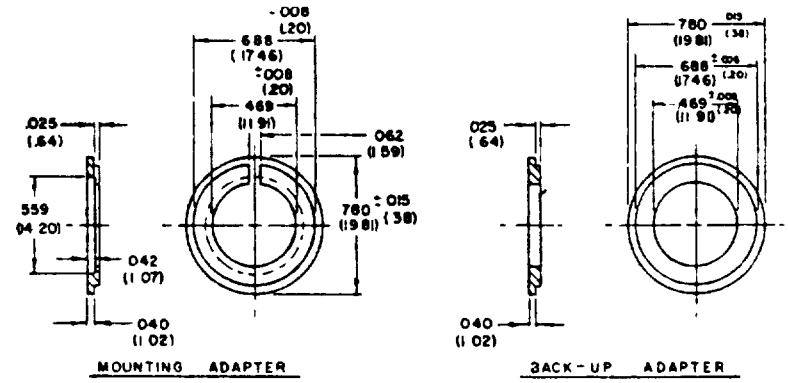

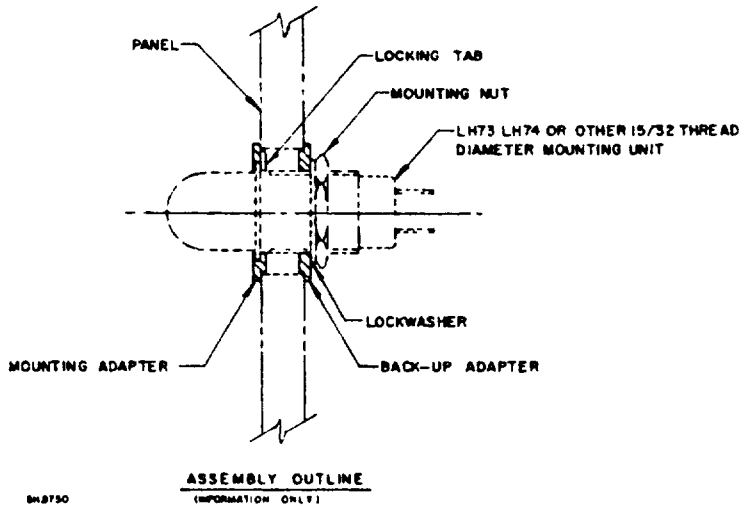

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ±0.004 inch for decimals.
2. Metric dimensions in parentheses are shown on figure for general information only and are based upon 1 inch =25.4 mm.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1.	Material:	Aluminum alloy type 2011-T3 and black anodized in accordance with MIL-A-8625, type II.
2.	Qualification:	Not applicable.
3.	Visual and mechanical examination:	Shall be conducted on a sampling basis as follows: Sampling shall be in accordance with MIL-STD-105. The acceptable quality level (AQL) shall be 4.0 percent defective and the inspection level shall be S-4 for normal, tightened and reduced inspection The reduced inspection procedure shall be in accordance with table VIII titled "Limit numbers for reduced inspection" of MIL-STD-105. Disposition of nonconforming lots shall be in accordance with MIL-STD-105.
4.	Intended use:	Suitable for 15/32 to 11/16 mounting means and for use with style LH73 and LH74 indicator light housings.
5.	Military part number:	M3661/49-001.

Preparing activity:
Navy-SH
(Project 6210-NO62SH)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974 713 155 6677

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:05Z
Check the source to verify that this is the current version before use.