MIL-P-15024B(SHIPS)
5 November 1956
SUPERSEDING
MIL-I-15024A(SHIPS)
31 March 1955

MILITARY SPECIFICATION

PLATES, IDENTIFICATION—INFORMATION AND MARKING FOR IDENTIFICATION OF ELECTRICAL, ELECTRONIC AND MECHANICAL EQUIPMENT

1. SCOPE

1.1 Scope.- This specification covers the material requirements for "identification plates" and "information plates" and the marking information for "identification plates" mounted on units, assemblies, and equipments of Bureau of Ships material.

1.2 Classification.- "Identification plates" and "information plates" shall be furnished in the following types, as specified (see 6.1):

Type A - Etched.
Type B - Engraved.
Type C - Stamped
Type D - Cast.
Type E - Stenciled.
Type F - Laminated.
Type G - Decalcomanias or adhesive backed metal foil.
Type H - Photographic.
Type I - Embossed.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

FEDERAL

QQ-A-318 - Aluminum - Alloy 52S, Plates and Sheets.
QQ-S-766 - Steel, Corrosion Resisting: Plates, Sheets, and Strips.
TT-C-595 - Colors; (for) Ready-Mixed Paints.
TT-P-141 - Paint, Varnish, Lacquer, and Related Material: Methods of Inspection, Sampling and Testing.

MILITARY

MIL-P-78 - Plastic-Material Laminated, Thermosetting (for Designation Plates).
MIL-N-894 - Nickel-Copper Alloy Bars, Plates, and Other Wrought Forms.
MIL-B-895 - Brass, Commercial; Bars, Forgings, Plates, Rods, Shapes, Sheets and Strips.
MIL-D-8634 - Decalcomanias: for Use on Exterior Surfaces of Aircraft
MIL-P-15037 - Plastic-Material, Laminated Thermosetting, Sheets, Glass-Cloth Melamine-Resin.

FSC 9905

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the currentversion before use.

NAVY DEPARTMENT
General Specifications for Inspection of Material.

STANDARDS

MILITARY
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-280 - Definition of Terms for Equipment Divisions.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Definitions. - For the purpose of this specification the following definitions apply:

3.1.1 "Identification plates". - The words "identification plates" wherever used herein shall refer to the identification plates for units, assemblies, or equipments of Bureau of Ships material.

3.1.2 "Information plates". - The words "information plates" wherever used herein shall refer to instruction, safety or warning plates, wiring diagrams, graphic charts, and other designation plates.

3.1.3 Definitions of other terms such as part, assembly, unit, equipment (set) shall be in accordance with Standard MIL-STD-280.

3.2 Marking information and format. - Marking information to be shown on identification plates or to be marked on parts, shall be consistent with the requirements of Standard MIL-STD-130. The arrangement of the information together with the desired special characteristics shall be in accordance with the applicable figures 1 through 5. The marking information for a particular item, together with views of typical plates, shall be shown on the working drawings of the item concerned.

3.2.1 Information plates. - Marking information to appear on information plates and the arrangement of the information shall be submitted to the bureau or agency concerned for approval.

3.2.2 Weight. - Lifting weight shall be indicated on either identification or information plate for items susceptible for frequent handling, such as motor-generators, reduction gears, and turbines.

3.3 Type of marking. - Letters shall be of Gothic capitals, and numerals and other characters shall be of similar appearance. The principal words or group of words and the Government type identification (name and Government designation of the item to which the identification plate will be attached) shall be emphasized by the use of larger letters. See figures 2 to 5 inclusive for typical sizes of markings.

3.3.1 Methods of marking. - The marking shall be made by a method which shall produce permanent and durable markings on identification plates and information plates to withstand the environmental conditions of the item to which the plates will be attached. Serial numbers and other designations which vary on each identification plate and information plate may be etched, impression-stamped, or punched into the area provided.

3.3.1.1 Marking of parts. - The marking of parts shall be made by a method which will produce markings of sufficient durability to last the anticipated life of the part under the environmental conditions to which it will be subjected.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the currentversion before use.

3.3.2 Temporary markings. - The use of decalcomanias, rubber stampings, stencilings or other markings of information of a temporary nature will not be allowed without the specific approval of the bureau or agency concerned, in which case the markings shall be covered with a coat of clear lacquer. Unless otherwise specified in the contract or order, decalcomanias, rubber stampings, stencilings, or other markings of information of a temporary nature will not be required to withstand the same environmental conditions as the item to which they will be attached.

3.3.3 Legibility. - The size of the letters, numerals, and other characters shall be as necessary for easy readability.

3.3.4 Filling of markings. -

3.3.4.1 All engraved, stamped, or direct etched letters, numerals, and other characters on metal plates and background on reversed etched metal plates shall be well filled with a hard paint, enamel, or lacquer of a contrasting color as specified (see 6.1) and the face of the plates shall be covered with a moisture-resistant varnish. Black enamel shall be used for filling markings on plates for propulsion and auxiliary turbines and gears.

3.3.4.2 Plastic plates engraved through one lamination so as to show a lamination of a contrasting color shall not have letters, numerals, and other characters filled.

3.4 Mounting and location. - Identification plates and information plates shall be mounted in a conspicuous place generally on the front or front panel of the item. When space does not permit mounting the approved plate on the front panel, the Government assigned identification and serial number shall be permanently marked on the front panel of each unit, as appropriate, in addition to the mounting of the approved plate on other than the front panel. Plates shall be mounted either externally or internally in locations easily accessible during operation. The mounting and location of plates shall be shown on the mechanical assembly drawing of the item. If the size or nature of the item precludes the mounting of an identification plate or information plate, information may be marked directly on the item by means of decalcomanias, adhesive backed metal foil, rubber stamping, stenciling, or other means, upon the specific approval of the bureau or agency concerned. The plates shall not be positioned so as to interfere with controls or obscure other required information. The mounting and location of plates shall not adversely effect the strength of the item on which the plate is mounted. In general plates shall not be mounted by means of rivets, self-tapping screws, or welding. However self-tapping screws may be used to mount identification plates on the sides of the following types of nonrotating electric equipment: dripproof, dripproof protected, enclosed ventilated, fogproof, open, protected, splashproof, and totally enclosed. The arrangement shall be such that the screw completely penetrates the enclosure. The point of the screw shall not endanger personnel or the interior electric equipment. Metal plates shall be mounted by removable type screws made of the same material as the plate. Plastic plates shall be mounted by corrosion-resisting screws. Plates of nickel-copper-alloy material in locations exposed to the weather shall be mounted by nickel-copper-alloy machine screws. Plates to be mounted on refrigerating condensers, chillers, or receivers shall be soft-soldered to the shell.

3.5 Materials. -

3.5.1 General. - Identification plates and information plates shall be made of a material that shall withstand the same environmental conditions as the item to which the plates will be attached. The individual equipment specification shall specify what material is to be used for each application which may be the same as the material of the item on which the plate is mounted. The general guide for the selecting of material for plates shall be (in order of preference):

(a) Nickel-copper-alloy (Monel) (Specification MIL-N-894).
(b) Brass (commercial) (Specification MIL-B-895).
(c) Corrosion-resisting steel (class FS-316, Specification QQ-S-766).
(d) Aluminum alloy (Specification QQ-A-318).

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

(e) Plastic (for application not directly exposed to weather) (Spec. MIL-P-78 or MIL-P-15037).
(f) Decalcomanias, adhesive backed metal foil, rubber stamping stenciling.

3.5.1.1 Where the scarcity of critical materials prevents the use of nickel-copper alloy, other materials in the order listed shall be used. Brass plates shall not be mounted directly on aluminum. Edges of plastic plates shall be beveled. The surfaces of plastic plates shall have a gloss factor of 25 ± 10 units (Spec. TT-P-141).

3.5.1.2 Color of laminations for plastic plates. - Except for type GMG laminates, the color values of the various lamination for types B, E, and F plastic plates shall conform to Specification MIL-P-78. Colors of cores and cover sheets shall be as specified (see 6.1).

3.5.1.3 Background. - On electronic equipment the background of unit plates shall be lusterless black (3727); the background of set plates shall be lusterless orange (3205), conforming to Specification TT-C-595.

3.5.1.4 Plating of brass plates will be satisfactory when so specified in the individual equipment specification.

3.6 Dimensions for plates. -

3.6.1 Identification plates. - Identification plate dimensions shall depend upon the size of the major unit or set and shall be selected from the standard sizes listed in table I. Where the unit, equipment, assembly, or part is too small to permit the installation of a size 1 plate as specified in table I, the size and thickness of the plate, information to be included thereon and method of mounting or attachment shall be as acceptable to the bureau or agency concerned. Sizes of identification plates for propulsion turbines and gears shall not exceed 6 inches in length (size 19). Sizes of identification plates for auxiliary turbines and gears shall not exceed 4 inches in length (size 10) (see figures 4B and 4C). For electronic equipments the preferred sizes are size 5 for units, size 6 for assemblies and groups, and size 9 for sets, size 4 for unit modification plates and

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

size 7 for set modification plates. Adequate space shall be provided to accommodate the information arrangement necessary to suit the special characteristics. Standard dimensions for identification plates shall be indicated by size numbers as specified (see 6.1).

Table I - Standard dimensions, identification plates.

Size number	Length	Width	Diameter of holes	Number of holes	Hole center to edge	Hole center spacing	
						Length	Width
	Inches	Inches	Inch		Inch	Inches	Inches
1	2	3/4	1/8	2	1/8	1-3/4	-----
3	2	2	1/8	4	1/8	1-3/4	1-3/4
4	3	1	1/8	2	1/8	2-3/4	-----
5	3	2	1/8	4	1/8	2-3/4	1-3/4
6	3	3	1/8	4	1/8	2-3/4	2-3/4
7	4	1-1/2	1/8	2	1/8	3-3/4	-----
8	4	2	1/8	4	1/8	3-3/4	1-3/4
9	4	3	1/8	4	1/8	3-3/4	2-3/4
10	4	4	1/8	4	3/16	3-5/8	3-5/8
12	5	3	5/32	4	3/16	4-5/8	2-5/8
14	5	5	5/32	4	3/16	4-5/8	4-5/8
17	6	4	5/32	4	3/16	5-5/8	3-5/8
19	6	6	5/32	4	3/16	5-5/8	5-5/8
21	7	3	5/32	4	3/16	6-5/8	2-5/8
23	7	5	5/32	4	3/16	6-5/8	4-5/8
25	7	7	5/32	4	3/16	6-5/8	6-5/8

3.6.2 Information plate dimensions shall be submitted by the contractor to the bureau or agency concerned for approval.

3.7 Detail features.-

3.7.1 Type A (etched).-

3.7.1.1 Material.- Type A plates shall be one of the following materials:

(a) Corrosion-resisting steel.
(b) Nickel-copper alloy.
(c) Aluminum alloy.
(d) Brass.

3.7.1.2 Marking.- Letters, numerals, other characters or background shall be etched. Additional information, if necessary, may be stamped on the plate.

3.7.1.3 Dimensions.- Etched letters, numerals, other characters or background shall not be less than 0.003 inch deep. Stampings of additional information shall not be less than 0.003 inch deep. The minimum thickness of type A plates shall be 0.03 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the currentversion before use.

3.7.2 Type B (engraved).-

3.7.2.1 Materials.- Type B plates shall be of one of the materials specified in 3.7.1.1 or of plastic material conforming to type NDP of Specification MIL-P-78 or Specification MIL-P-15037. Other types of plastic material for a specific purpose may be used upon the approval of the bureau or agency concerned.

3.7.2.2 Marking.- Letters, numerals, and other characters shall be engraved. Addditional information if necessary may be stamped on the plate.

3.7.2.3 Dimensions.- The depth of engraving and thickness shall be as specified in table II. Stampings of additional information shall not be less than 0.003 inch deep.

Table II - Depth of engraving and thickness of plate.

Plate material	Minimum depth of engraving	Minimum thickness
	Inch	Inch
Plastic	0.003	0.0625
Brass or aluminum alloy	.003	.03
Nickel-copper alloy	.003	.03
Corrosion-resisting steel	.003	.03

3.7.3 Type C (stamped).-

3.7.3.1 Materials.- Type C plates shall be of one of the following materials:

(a) Brass.
(b) Nickel-copper alloy.
(c) Corrosion-resisting steel.

3.7.3.2 Marking.- Letters, numerals, and other characters shall be stamped on the plate. Embossing or relief stamping will not be acceptable.

3.7.3.3 Dimensions.- Stamping shall not be less than 0.003 inch deep. Thickness of type C plates used shall be in accordance with 8.7.1.3.

3.7.4. Type D (cast).-

3.7.4.1 Materials.- Type D plates shall be of cast brass or bronze of commercial quality.

3.7.4.2 Marking.- Letters, numerals, and other characters shall be raised above the body of the plate and shall be polished, the balance of the plate to have a roughened or stippled finish. Additional information, if necessary, may be stamped on the plate.

3.7.4.3 Dimensions.- Letters, numerals, and other characters shall be raised to 0.03 inch. Thickness of type D plates shall be as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

3.7.5 Type E (stenciled).-

3.7.5.1 Material.- Type E plates shall be of plastic material conforming to type HSP of Specification MIL-P-78 or Specification MIL-P-15037. Other types of plastic material for a specific purpose may be used upon the approval of the bureau or agency concerned.

3.7.5.2 Marking.- Letters, numerals, and other characters shall be stenciled on the plate. Marking shall be applied by lithographing, by the silk screen method (method of printing through a stencil that is bonded to a silk screen) or a similar process.

3.7.5.3 Dimensions.- Minimum thickness of type E plates shall be 0.0625 inch.

3.7.6 Type F (laminated).-

3.7.6.1 Material.- Type F plates shall be of plastic material, type GCP-H of Specification MIL-P-78. Other types of plastic material for a specific purpose may be used upon the approval of the bureau or agency concerned.

3.7.6.2 Marking.- The printed information shall be included between the laminations and shall be clearly legible through a transparent outer layer.

3.7.6.3 Dimensions.- Minimum thickness of type F plates shall be 0.0625 inch.

3.7.7 Type G (decalcomanias or "adhesive-backed metal foil").-

3.7.7.1 General.- Decalcomanias or adhesive-backed metal foil plates shall be mounted on major units normally considered expendable and which do not require permanent marking information to withstand the environmental conditions or the major unit or set. In general, unless otherwise specified in the contract or order, type G plates shall be used to indicate the information necessary for delivery, handling, preliminary or final installation or operation of the major unit of set. They may also be used upon specific approval of the bureau or agency concerned on major units or sets subject to radioactive contamination, or where it is considered impractical to drill mounting holes.

3.7.7.2 Materials.- Decalcomanias shall comply with Specification MIL-D-8634. Adhesive-backed metal foil shall be as approved by the bureau or agency concerned. Materials shall depend upon the type of material, surface finish, and exposure of the item to which the decalcomania or adhesive backed metal foil will be affixed.

3.7.7.3 Marking.- Letters, numerals, and other characters shall be of the open letter design or solid letter design. The open letter design shall have the background omitted and the solid letter design shall have the letters, numerals, and other characters integral with the background. Additional markings may be rubber-stamped or lettered directly on the decalcomania or adhesive-backed metal foil plate before mounting.

3.7.7.4 Dimensions.- Thickness of type G plates shall depend upon the material and the expected life endurance of the decalcomania necessary for the delivery, handling, preliminary, or final installation, and operation of the item to which the decalcomania or adhesive-backed metal foil plate will be affixed.

3.7.7.5 Mounting.- Decalcomanias or adhesive-backed metal foil plates shall be designed for mounting on metallic, phenolic, or organic surface finishes. Mounting shall be in accordance with standard application procedures specified by the manufacturer and approved by the bureau or agency concerned. Properly applied decalcomanias or adhesive backed metal foil shall be firmly adhered and free of bubbles or loose edges. Should a transfer be damaged beyond usefulness after its application, a second transfer may be applied directly over the first transfer.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the currentversion before use.

3.7.8 Type H (photographic).-

3.7.8.1 Materials.- Type H plates shall be of one of the following materials depending upon the photographic process used:

(a) Corrosion-resisting steel.
(b) Aluminum.
(c) Plastic (fiber glass cloth reinforced polyester laminate).

3.7.8.2 Marking.- Letters, numerals, and other characters shall be integrated into the plate by a photographic process approved by the bureau or agency concerned and as specified (see 6.1). Stamping of additional marking information will not normally be permitted on metal plates. Plates with plastic backing may be revised by hand engraving through the coating.

3.7.8.3 Dimensions.- Thickness of type H plates shall be as specified in table III.

Table III - Thickness of type H plates.

Plate material	Minimum thickness
	Inch
Corrosion-resisting steel	0.0156
Aluminum	.02
Plastic	.015

3.7.9 Type I (embossed).-

3.7.9.1 Materials.- Type I plates shall be of the following materials:

(a) Brass.
(b) Nickel-copper alloy.
(c) Corrosion-resistant steel.
(d) Aluminum.

3.7.9.2 Marking.- Letters, numerals, and other characters shall be embossed on the plate by use of an electro-type machine.

3.7.9.3 Dimensions.- The depth of embossing shall be not less than 0.003 inch deep. The minimum thickness of type I plates shall be 0.03 inch.

3.8 Workmanship.- Identification plates and information plates shall be furnished with smooth edges and shall be free from sharp corners. Unless otherwise specified in the contract or order, identification plates and information plates shall be suitable for mounting on finished major units or sets.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection and tests shall be conducted to determine that the material employed is in accordance with the requirements of the applicable material specification. Inspection and tests shall also be conducted to determine that the letters, numerals, and other characters are of the specified height on cast identification plates or, are stamped, etched, embossed or engraved to the depth required. In determining the depth of stamping, etching, engraving or embossing, care shall be exercised to insure that all filling material is removed. Surface inspection shall also be conducted to insure that

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

the identification plates and information plates furnished comply with the requirements of the contract or order regarding dimensions, thickness, format, life endurance, and finish. No chemical analysis will be required for brass or bronze plates. Plates necessary for proper inspection shall be furnished in addition to those required by the contract or order and without charge to the Government. One production run sample of each type of identification plate or information plate being supplied on the the contract or order shall be furnished for inspection. At the request of the bureau or agency concerned, the contractor shall furnish a photographic print of each type of identification plate or information plate being supplied in lieu of a production run sample.

4.2 Inspection procedures.- For Naval purchases, the general inspection procedures shall be in accordance with General Specifications for Inspection of Material.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking requirements are not applicable to this specification.

6. NOTES

6.1 Ordering data.- Procurement documents for the basic equipment concerned should specify the following:


(a) Title, number, and date of this specification.
(b) Whether an identification or information plate is required and the type (see 1.2).
(c) Weight (see 3.2.2).
(d) Color of filler for metal plates (see 3.3.4.1).
(e) Material required (see 3.5.1).
(f) Color of cores and cover sheets (see 3.5.1.2).
(g) Size number (see 3.6.1).
(h) Thickness of type D plates (see 3.7.4.3).
(i) Photographic process for type H plates (see 3.7.8.2).

6.1.1 Procurement documents for turbines and gears need specify only title, number, and date of this specification.

Notice.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Preparing activity:
Navy - Bureau of Ships

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the currentversion before use.

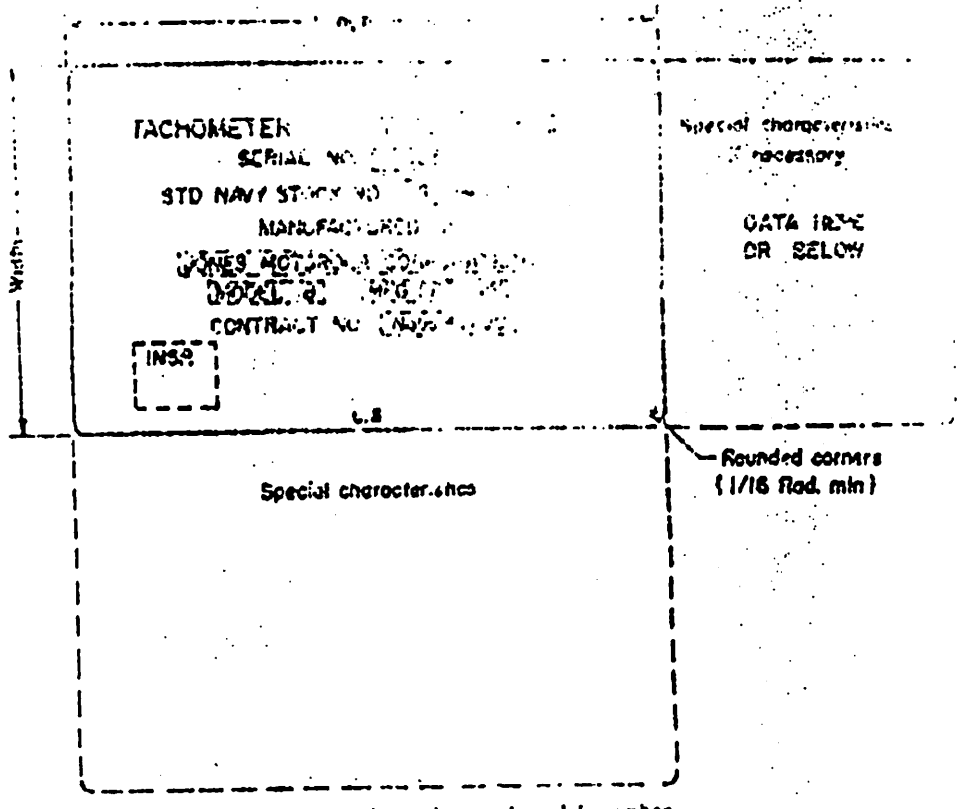

NOTE: Items such as stock number and serial number may be omitted if not required by the procuring activity.

SH 126

Figure 1 - Basic arrangement.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

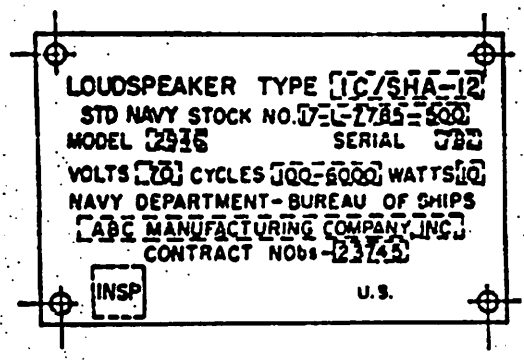


Figure 2 A.– Typical unit.

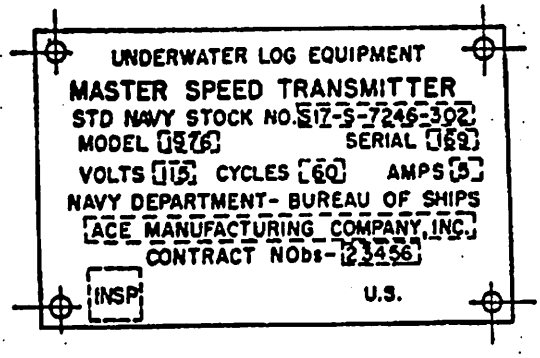


Figure 2 B.– Typical set.

SH 127

Figure 2.– Typical identification plates for electrical equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

FIGURE 3.- ILLUSTRATIONS OF IDENTIFICATION PLATES FOR ELECTRONIC EQUIPMENT.

NOTE: Dimensions and other information on illustrations show typical proportions and spacing. The square is the space for inspector's stamp.

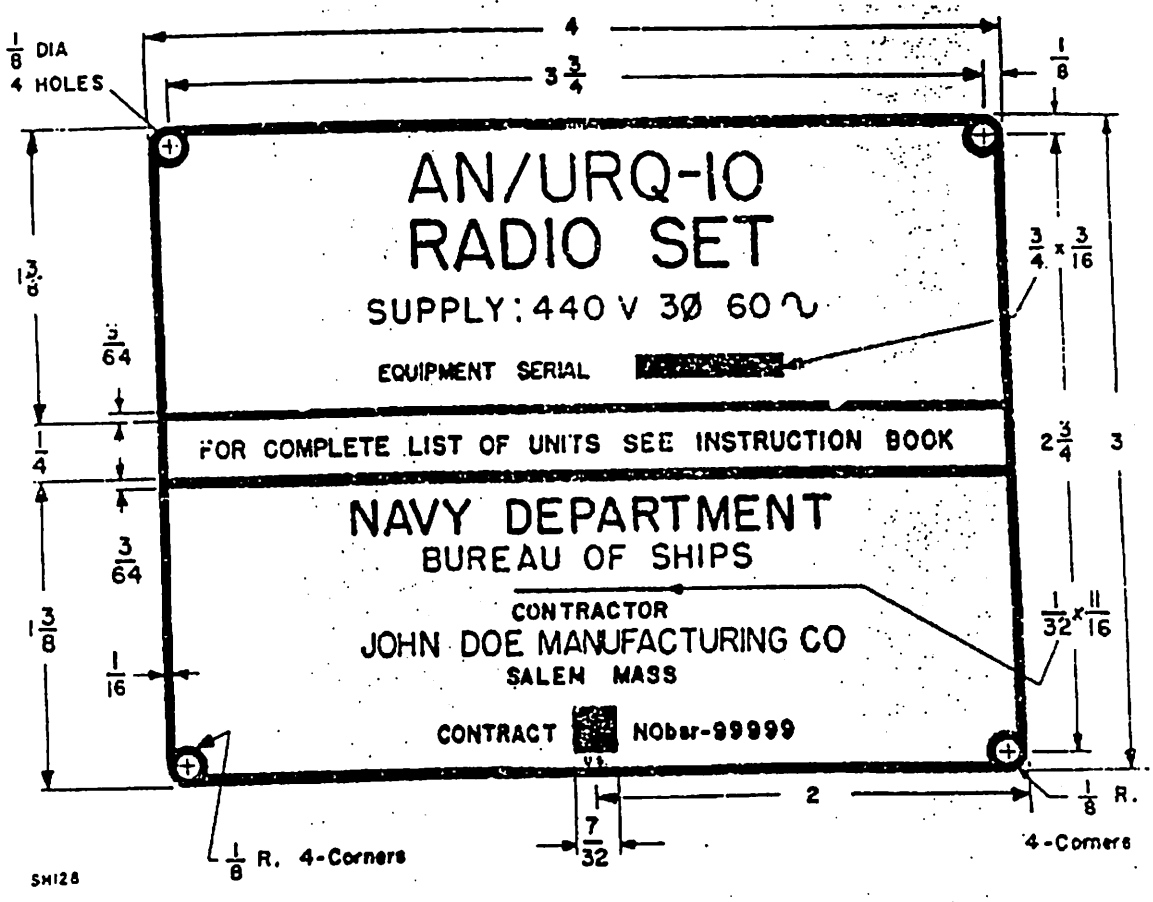


Figure 3A.- Set.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the currentversion before use.

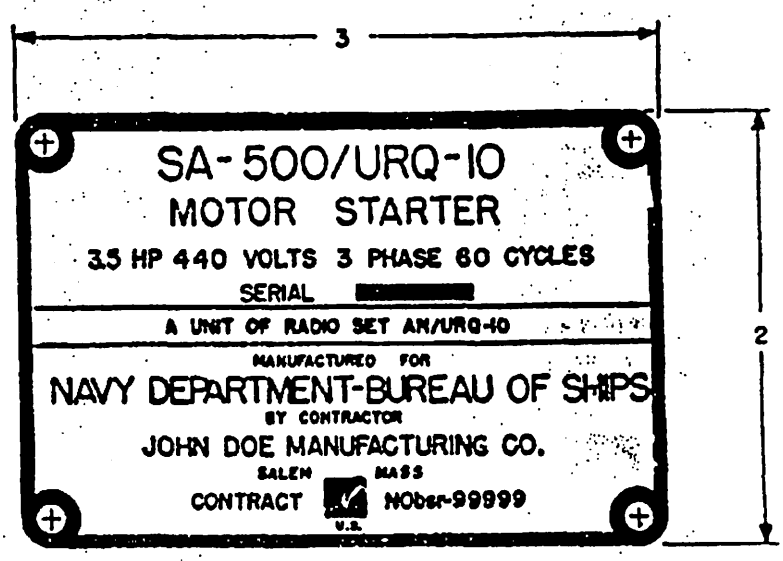


Figure 38.- Unit

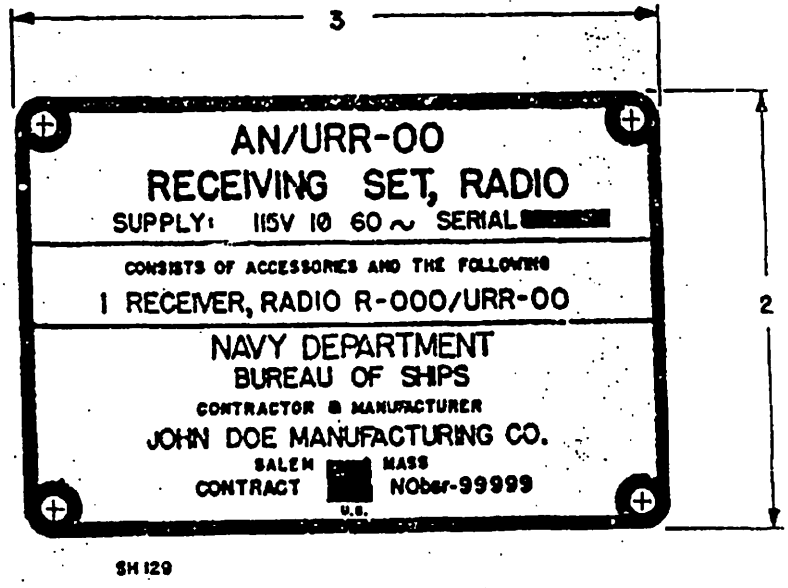


Figure 3C.-Combination Set and Unit

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.


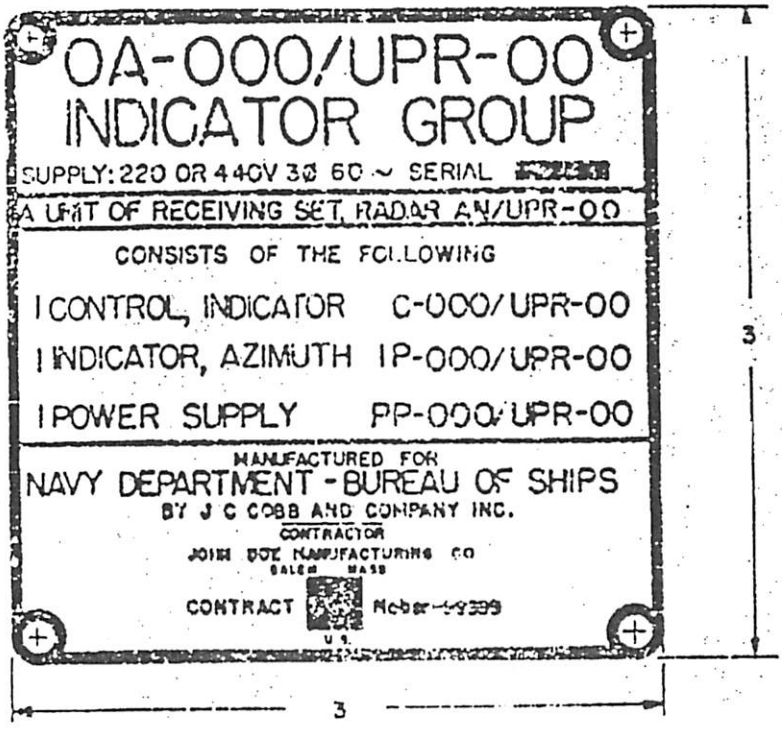


Figure 3D.-Group.

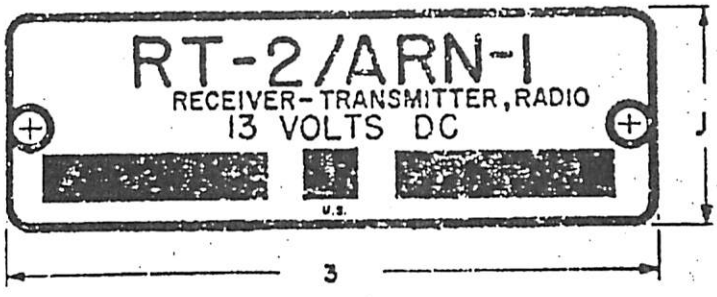

SH130A Figure 3E.- Unit. (For limited space and airborne equipment).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:23Z
Check the source to verify that this is the current version before use.

MODIFIED TO RADIO SET AN/SRC-00
BY ADDITION OF FIELD CHANGE #00
UNDER CONTRACT NO. [illegible]00000

Figure 3F - Modification [illegible]
NOTE: The [illegible] of the modification data shall be the same as that of the plate in close vicinity the modification plate will be used.

GENERATOR SET, TURBINE

SERIAL NO. [ ]

STD. GOVT. STOCK NO. [ ]

MANUFACTURED BY

[ ]

CONTRACT NO. [ ]

INSP [ ]

TURBINE DATA

MODEL [ ] RPM [ ]

STEAM, PSIG [ ] VACUUM HG [ ]

STEAM TEMP [ ]

GENERATOR DATA

MFR [ ] MODEL [ ] RPM [ ]

KW [ ] VOLTS [ ] AC or DC [ ]

U.S.

SHI31

Figure 4A - Typical generator set.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.


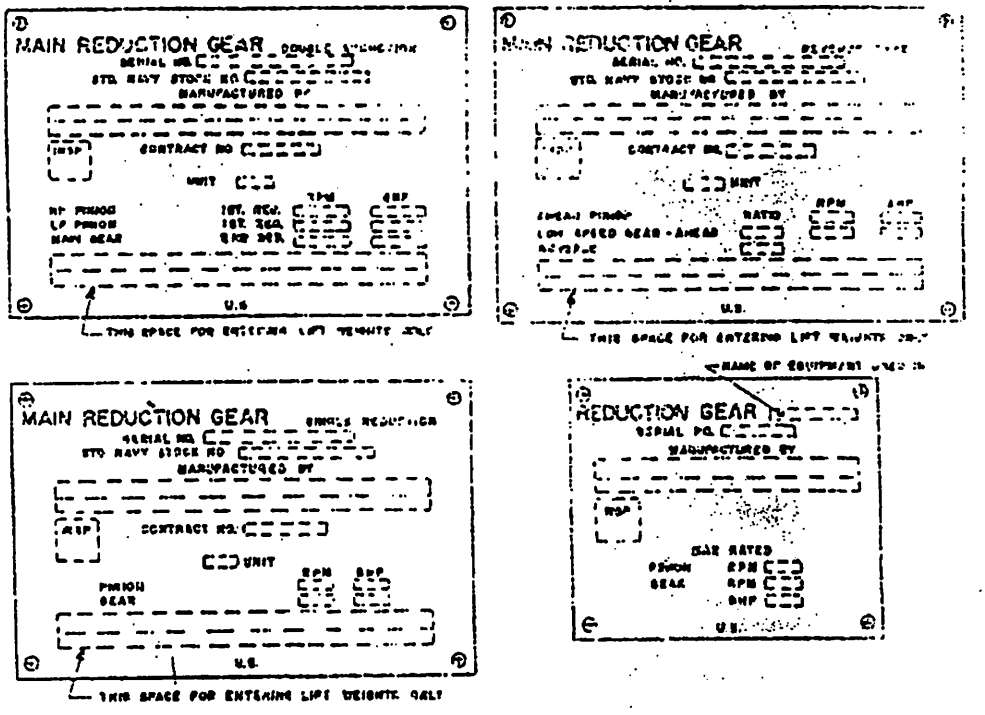


Figure 4B.- Typical reduction gears.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

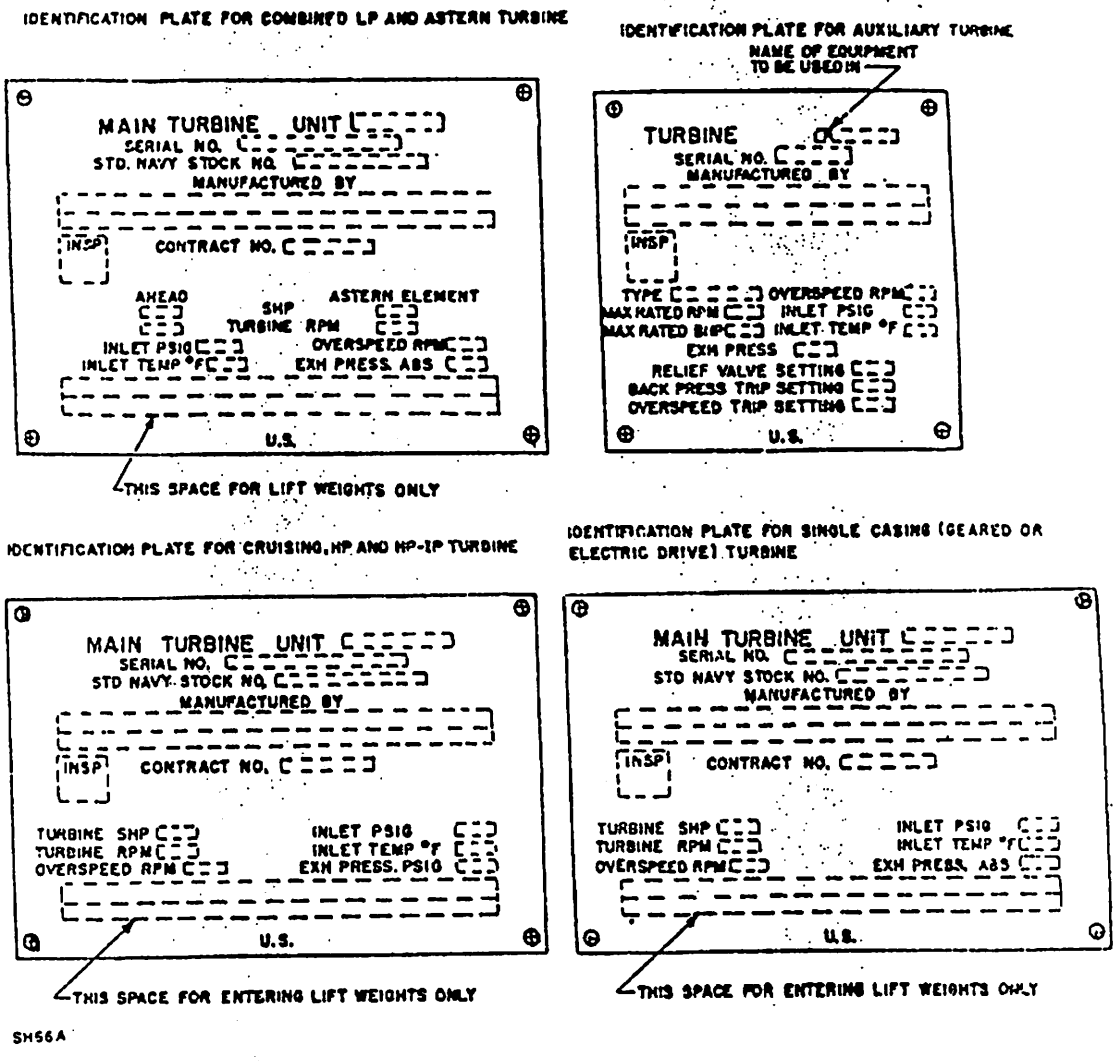


NOTE:

(1) All terminal conditions stamped on identification plates are for design full power, except for values of the separate cruising turbine which shall be for maximum cruising condition.

(2) Each pressure stamped on an identification plate must, unless already apparent on plate, indicate the unit of pressure and whether-or-not value stamped is absolute, i.e. 25 in. hg., 10 p.s.i.g., etc.

Figure 4C - Typical turbines.


Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

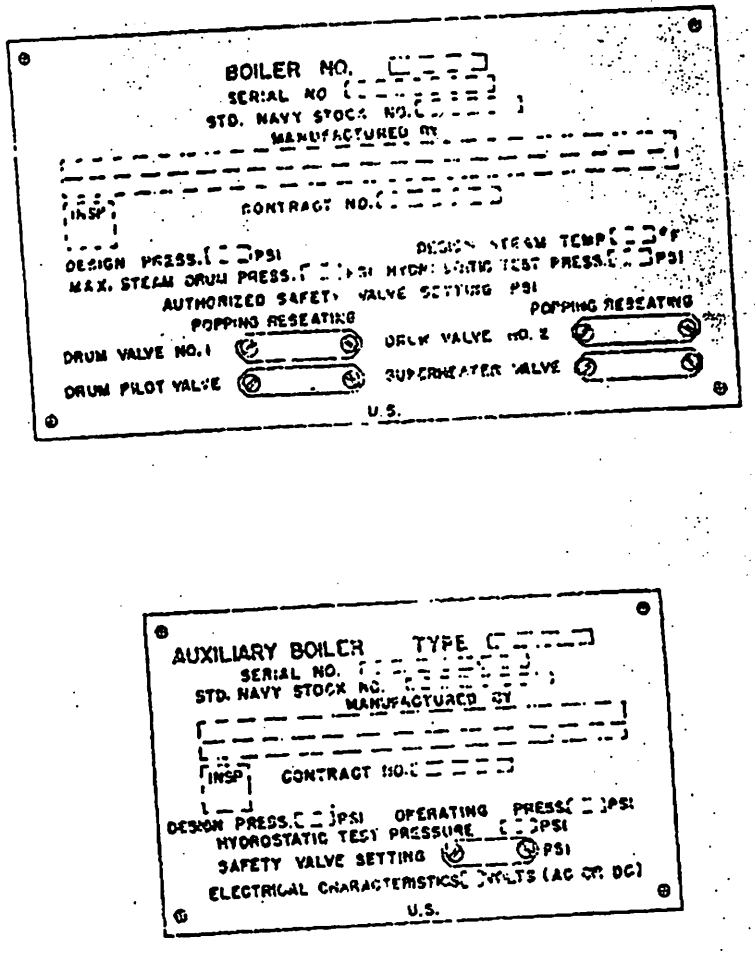

SH133

Figure 4D.-Typical boilers

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

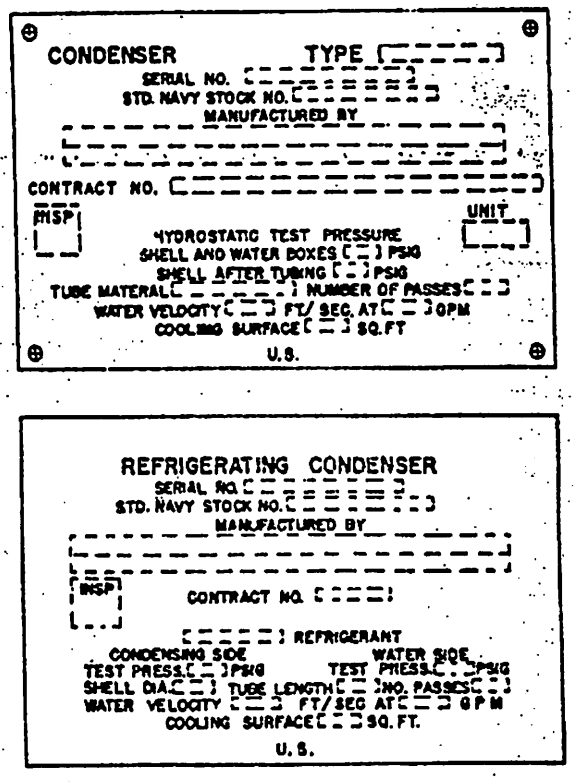

Note: Identification plates shall be soft soldered to tank or receiver.

SH134

Figure 4 E.- Typical condensers.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.


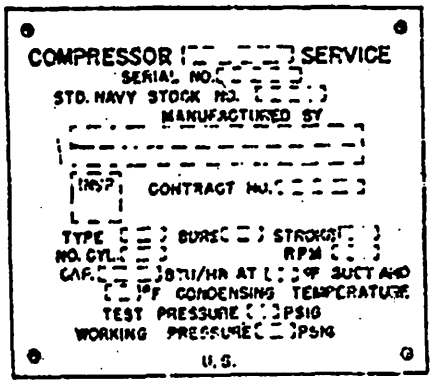


Figure 4F.–Typical compressor.

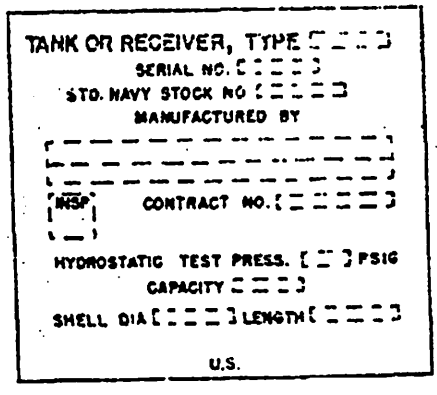

Note: Identification plate shall be soft soldered to tank or receiver.

SHIPS

Figure 4G.–Typical tank or receiver.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:23Z
Check the source to verify that this is the current version before use.

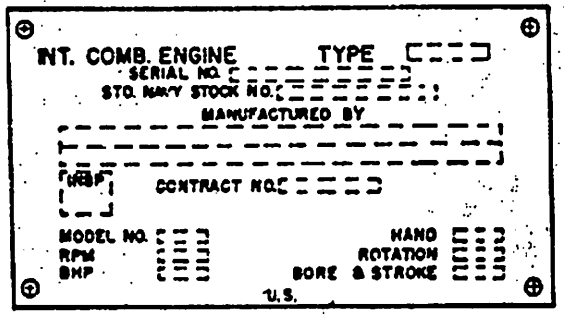


Figure 4 H.—Typical diesel engine.

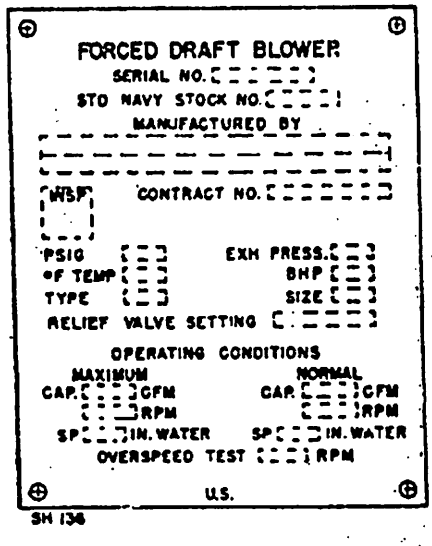


Figure 4 J.—Typical forced draft blower.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.


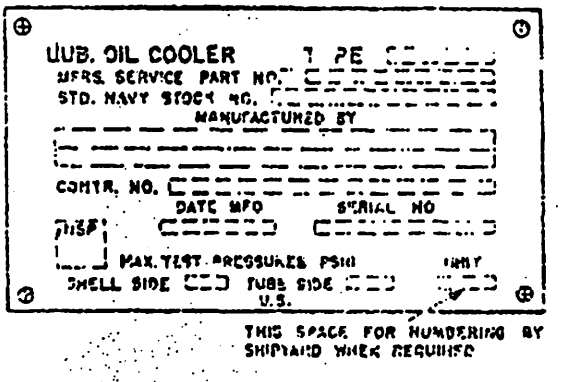


Figure 4K.—Typical cooler or heater. To be used for lub. oil coolers, heaters, fresh water coolers, fuel oil heaters, coolers.

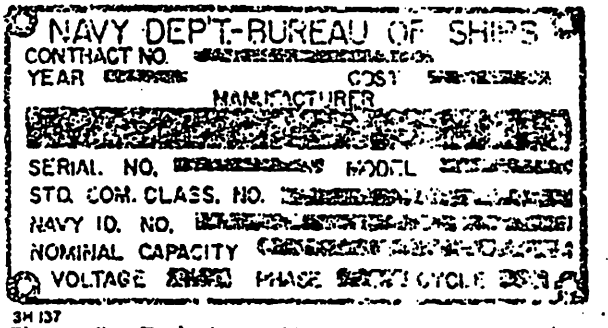

3H 137

Figure 5.—Typical machine tools and industrial Shop Equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.