MIL-P-15024C
29 February 1968
SUPERSEDING
MIL-P-15024B(SHIPS)
5 November 1956
(See section 6)

MILITARY SPECIFICATION

PLATES, IDENTIFICATION--INFORMATION AND MARKING FOR IDENTIFICATION OF ELECTRICAL, ELECTRONIC AND MECHANICAL EQUIPMENT

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the material requirements for "identification plates" and "information plates" and the marking information for "identification plates" mounted on units, assemblies, and equipments of ships and for use on missiles and aircraft instruments, equipment and accessories.

1.2 Classification. "Identification plates" and "information plates" shall be furnished in the following types, as specified (see 6.2):

Type A - Etched.
Type B - Engraved.
Type C - Stamped.
Type D - Cast.
Type E - Stenciled.
Type F - Laminated.
Type G - Adhesive-backed metal foil.
Type H - Photosensitive.
Type I - Debossed.
Type J - Identification tag.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-387 - Plastic Sheet, Laminated, Thermosetting (for Designation Plates)
P-C-437 - Cleaning Compound High Pressure (Steam) Cleaner
QQ-A-250 - Aluminum Alloy Plate and Sheet, General Specification for
QQ-A-250/8 - Aluminum Alloy 5052, Plate and Sheet
QQ-B-613 - Brass, Leaded and Non-Leaded, Flat Products (Plate, Bar, Sheet and Strip)
QQ-N-281 - Nickel-Copper-Alloy Bar, Plate, Rod, Sheet Strip, Wire, Forgings, and Structural and Special Shaped Sections
QQ-S-766 - Steel Plates, and Strip-Corrosion Resisting
VV-K-211 - Kerosene
CCC-T-191 - Textile Test Methods
PPP-B-636 - Box, Fiberboard
PPP-T-60 - Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging

MILITARY

MIL-P-116 - Preservation, Methods of
MIL-L-10547 - Liners, Case, and Sheet, Overwrap, Water-Vaporproof or Waterproof, Flexible
MIL-P-15037 - Plastic Sheet, Laminated, Thermosetting, Glass-Cloth, Melamine-Resin
MIL-C-25769 - Cleaning Compound, Aircraft Surface, Alkaline Waterbase

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL
FED-STD-141 - Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling and Testing
FED-STD-595 - Colors

MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-280 - Definition of Terms for Equipment Divisions
MS-24123 - Plate, Identification

AIR FORCE-NAVY AERONAUTICAL
AN 7515 - Plate, Instrument Identification

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

DEFENSE SUPPLY AGENCY
Handbook H4 - Federal Supply Code for Manufacturers

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Definitions. For the purpose of this specification the following definitions apply:

3.1.1 "Identification plates". The words "identification plates" wherever used herein shall refer to the identification plates for units, assemblies, or equipments of military material.

3.1.2 "Information plates". The words "information plates" wherever used herein shall refer to instruction, safety or warning plates, wiring diagrams, graphic charts, and other designation plates.

3.1.3 Definitions of other terms such as part, assembly, unit, equipment (set) shall be in accordance with MIL-STD-280.

3.2 Marking information and format. Marking information to be shown on identification plates or to be marked on parts, shall be consistent with the requirements of MIL-STD-130. The arrangement of the information together with the desired special characteristics shall be in accordance with the applicable figures 1 through 5 and as specified in MS24123. The marking information for a particular item, together with views of typical plates, shall be shown on the working drawings of the item concerned.

3.2.1 Information plates. Marking information to appear on information plates and the arrangement of the information shall be submitted to the procuring activity for approval.

3.3 Type of marking. Letters shall be of Gothic capitals, and numerals and other characters shall be of similar appearance. The principal words or group of words and the Government type identification (name and Government designation of the item to which the identification plate will be attached) shall be emphasized by the use of larger letters.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.

3.3.1 Methods of marking. The marking shall be made by a method which shall produce permanent and durable markings on identification plates and information plates to withstand the environmental conditions of the item to which the plates will be attached. Serial numbers and other designations which vary on each identification plate and information plate may be etched, impression-stamped, or punched into the area provided.

3.3.1.1 Marking of parts. The marking of parts shall be made by a method which will produce markings of sufficient durability to last the anticipated life of the part under the environmental conditions to which it will be subjected.

3.3.2 Temporary markings. The use of rubber stampings, silk screenings or other markings of information of a temporary nature will not be allowed without the specific approval of the procuring activity, in which case the markings shall be covered with a coat of clear lacquer. Unless otherwise specified in the contract or order, rubber stampings, silk screenings, or other markings of information of a temporary nature will not be required to withstand the same environmental conditions as the item to which they will be attached.

3.3.3 Legibility. Legibility, including size and type of lettering, numerals and other characters shall be such as required for ready readability and identification.

3.3.4 Filling of markings.

3.3.4.1 All engraved, stamped, or raised etched letters, numerals, and other characters on metal plates and background on sunken etched metal plates shall be well filled with a hard paint, enamel, or lacquer of a contrasting color as specified (see 6.1) and the face of the plates shall be covered with a moisture-resistant varnish. Black enamel shall be used for filling markings on plates for propulsion and auxiliary turbines and gears.

3.3.4.2 Plastic plates engraved through one lamination so as to show a lamination of a contrasting color shall not have letters, numerals, and other characters filled.

3.4 Materials.

3.4.1 General. Identification plates and information plates shall be made of a material that shall withstand the same environmental conditions as the item to which the plates will be attached. The individual equipment specification shall specify what material is to be used for each application which may be the same as the material of the item on which the plate is mounted. The general guide for the selecting of material for plates shall be (in order of preference):

(a) Nickel-copper alloy (Monel) (QQ-N-281)
(b) Brass (commercial) (QQ-B-613, composition 260)
(c) Corrosion-resisting steel (class 302 of QQ-S-766)
(d) Aluminum alloy (QQ-A-250/8)
(e) Plastic (for application not directly exposed to weather) (L-P-387 or MIL-P-15037)

3.4.1.1 Where the scarcity of critical materials prevents the use of nickel-copper alloy, other materials in the order listed shall be used. Edges or plastic plates shall be beveled. The surfaces of plastic plates shall have a gloss factor of 25 ± 10 units as tested by method 6101 of FED-STD-141.

3.4.1.2 Color of laminations for plastic plates. Except for type GME laminates (MIL-P-15037), the color values of the various laminations for types B, E, and F plastic plates shall conform to L-P-387. Colors of cores and cover sheets shall be as specified (see 6.1).

3.4.1.3 Background. On electronic equipment, the background of unit plates shall be either type II or type III as specified in table I.

3.4.1.3.1 The background of all other equipment shall be in accordance with table I.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

Table I - Color

Style	Background		Characters	
	Color	FED-STD-595	Color	FED-STD-595
I	White	37875	Black	27038
II	Black	37038	White	37875
III	Black	37038	Natural Metal	

3.4.1.4 Plating of brass plates will be satisfactory when so specified in the individual equipment specification.

3.4.1.5 Aluminum shall have a matte finish. All other metals shall have a satin (line) finish.

3.5 Dimensions for plates.

3.5.1 Identification plates. Identification plate dimensions shall depend upon the size of the major unit or set and shall be selected from the standard sizes listed in table II and MS24123. Where the unit equipment, assembly, or part is too small to permit the installation of a size 1 plate as specified in table II, the size and thickness of the plate, information to be included thereon and method of mounting or attachment shall be as acceptable to the procuring activity. Sizes of identification plates for propulsion turbines and gears shall not exceed 6 inches in length (size 19). Sizes of identification plates for auxiliary turbines and gears shall not exceed 4 inches in length (size 10) (see figures 4B and 4C). For electronic equipments the preferred sizes are size 5 for units, size 6 for assemblies and groups, and size 9 for sets, size 4 for unit modification plates and size 7 for set modification plates. Adequate space shall be provided to accommodate the information arrangement necessary to suit the special characteristics. Standard dimensions for identification plates shall be indicated by size numbers as specified (see 6.2).

Table II - Standard dimensions, identification plates.

Size number	Length	Width	Diameter of holes	Number of holes	Hole center to edge	Hole center spacing	
						Length	Width
	Inches	Inches	Inch		Inch	Inches	Inches
1	2	3/4	1/8	2	1/8	1-3/4	------
3	2	2	1/8	4	1/8	1-3/4	1-3/4
4	3	1	1/8	2	1/8	2-3/4	------
5	3	2	1/8	4	1/8	2-3/4	1-3/4
6	3	3	1/8	4	1/8	2-3/4	2-3/4
7	4	1-1/2	1/8	2	1/8	3-3/4	------
8	4	2	1/8	4	1/8	3-3/4	1-3/4
9	4	3	1/8	4	1/8	3-3/4	2-3/4
10	4	4	1/8	4	3/16	3-5/8	3-5/8
12	5	3	5/32	4	3/16	4-5/8	2-5/8
14	5	5	5/32	4	3/16	4-5/8	4-5/8
17	6	4	5/32	4	3/16	5-5/8	3-5/8
19	6	6	5/32	4	3/16	5-5/8	5-5/8
21	7	3	5/32	4	3/16	6-5/8	2-5/8
23	7	5	5/32	4	3/16	6-5/8	4-5/8
25	7	7	5/32	4	3/16	6-5/8	6-5/8

3.5.1.1 Instrument identification plates shall be as specified in AN 7515.

3.5.2 Information plate dimensions shall be submitted by the contractor to the procuring activity for approval.

3.6 Color.

3.6.1 The colors to be used on the plates shall be as specified in table I.

3.7 Detail features.

3.7.1 Type A (etched).

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

3.7.1.1 Materials. Type A plates shall be of one the following materials:

(a) Corrosion-resisting steel.
(b) Nickel-copper alloy.
(c) Aluminum alloy.
(d) Brass.

3.7.1.2 Marking. Letters, numerals, other characters or background shall be etched. Additional information, if necessary, may be stamped on the plate. Additional stamped information such as serial number, dates, etc. need not be filled.

3.7.1.3 Dimensions. Etched letters, numerals, other characters or background shall not be less than 0.003 inch deep. Stampings of additonal information shall not be less than 0.003 inch deep. The minimum thickness of type A plates shall be 0.03 inch.

3.7.2 Type B (engraved).

3.7.2.1 Materials. Type B plates shall be of one of the materials specified in 3.7.1.1 or of plastic material conforming to type NDP of L-P-387. Other types of plastic material for a specific purpose may be used upon the approval of the procuring activity.

3.7.2.2 Marking. Letters, numerals, and other characters shall be engraved. Additional information if necessary may be stamped on the plate. Additional stamped information such as serial number, dates, etc. need not be filled except on plastics which shall be filled.

3.7.2.3 Dimensions. The depth of engraving and thickness shall be as specified in table III. Stampings of additional information shall be not less than 0.003 inch deep.

Table III - Depth of engraving and thickness of plate.

Plate material	Minimum depth of engraving	Minimum thickness
	Inch	Inch
Plastic	0.003	0.0625
Brass or aluminum alloy	.003	.03
Nickel-copper alloy	.003	.03
Corrosion-resisting steel	.003	.03

3.7.3 Type C (stamped).

3.7.3.1 Materials. Type C plates shall be of one of the following materials:

(a) Brass.
(b) Nickel-copper alloy.
(c) Corrosion-resisting steel.
(d) Aluminum alloy.

3.7.3.2 Marking. Letters, numerals, and other characters shall be stamped on the plate. Embossing or relief stamping will not be acceptable.

3.7.3.3 Dimensions. Stamping shall not be less than 0.003 inch deep. Thickness of type C plates used shall be in accordance with 3.7.1.3.

3.7.4 Type D (cast).

3.7.4.1 Materials. Type D plates shall be of cast brass or bronze of commercial quality.

3.7.4.2 Marking. Letters, numerals, and other characters shall be raised above the body of the plate and shall be polished, the balance of the plate to have a roughened or stippled finish. Additional information, if necessary, may be stamped on the plate.

3.7.4.3 Dimensions. Letters, numerals, and other characters shall be raised to 0.03 inch. Thickness of type D plates shall be as specified (see 6.2).

3.7.5 Type E (stenciled).

3.7.5.1 Materials. Type E plates shall be of plastic material conforming to type

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

HSP of L-P-387 or MIL-P-15037. Other types of plastic material for a specific purpose may be used upon the approval of the procuring activity.

3.7.5.2 Marking. Marking shall be applied by lithographing, by the silk screen method or a similar process. A protective coating of clear lacquer or baking enamel shall be applied over the marking.

3.7.5.3 Dimensions. Mimimum thickness of type E plates shall be 0.0625 inch.

3.7.6 Type F (laminated).

3.7.6.1 Materials. Type F plates shall be of plastic material, type GCP-H of L-P-387. Other types of plastic material for a specific purpose may be used upon the approval of the procuring activity.

3.7.6.2 Marking. The printed information shall be included between the laminations and shall be clearly legible through a transparent outer laye-

3.7.6.3 Dimensions. Minimum thickness of type F plates shall be 0.0625 inch.

3.7.7 Type G (Adhesive-backed metal foi.). Adhesive-backed metal foil plates shall comply with MIL-P-19834.

3.7.8 Type H (photosensitive).

3.7.8.1 Materials. Type H plates shall be of one of the following materials depending upon the photographic process used:

(a) Aluminum, anodized.
(b) Plastic.

3.7.8.2 Marking. Letters, numerals, and other characters shall be integrated into the plate by a photographic process approved by the procuring activity and as specified.

3.7.8.2.1 Aluminum anodized plates shall have class I or class II compounds imbedded within the oxide layer.

Class I - Photosensitized with silver compounds
Class II - Photosensitized with compounds other than silver.

3.7.8.2.2 Stamping of additional marking information is not permitted on metal plate.

3.7.8.3 Dimensions. Thickness of type H plates shall be as specified in table IV.

Table IV - Thickness of type H plates.

Plate material	Minimum thickness
	Inch
Aluminum	.02
Plastic	.015

3.7.9 Type I plates (debossed).

3.7.9.1 Materials. Type I shall be of the following materials:

(a) Brass.
(b) Nickel-copper alloy.
(c) Corrosion-resistant steel.
(d) Aluminum.

3.7.9.2 Marking. Letters, numerals, and other characters shall be debossed (stamped) in the plate.

3.7.9.3 Dimensions. The depth of debossing shall be not less than 0.003 inch deep. The minimum thickness of type I plates shall be 0.03 inch.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the currentversion before use.

3.7.10 Type J (Identification tag).

3.7.10.1 Materials. Type J tags shall be of a plastic material able to comply with the following:

(a) Shall withstand temperatures of 25°C. to 65°C. for not less than 4 hours.
(b) Shall be self extinguishing when ignited by an open flame.
(c) Shall be flexible enough to bend completely around a cable of at least 1/4-inch diameter.

3.7.10.2 Marking. Letters, numerals, and other characters shall be permanently stamped in the plastic. The color shall be either type I or II of table I.

3.7.10.3 Dimensions. The thickness of the tag shall be no less than 0.015 inch. The length of the tag shall be adjusted according to either:

(a) Number of characters or
(b) Dimensions of the cable.

3.8 Workmanship. Identification plates and information plates shall be furnished with smooth edges and shall be free from sharp corners. Unless otherwise specified in the contract or order, identification plates and information plates shall be suitable for mounting on finished major units or sets.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for quality conformance inspection.

4.2.1 Lot. All plates of the same type offered for delivery at one time shall be considered a lot for purposes of inspection.

4.2.2 Sampling for examination. A random sample of plates shall be selected from each lot in accordance with MIL-STD-105 at inspection level III for the examination specified in 4.3. The acceptable quality level (AQL) shall be 4 percent defective.

4.2.3 Sampling for tests. A random sample of plates shall be selected from each lot in accordance with MIL-STD-105 at inspection level S-4. Tests shall be as specified in 4.4.

4.3 Examination. Each of the sample plates selected in accordance with 4.2.2 shall be examined to verify compliance with the requirements of this specification. Examination shall be conducted as specified in table V. Any plate in the sample containing one or more defects shall be rejected and if the number of defective plates in any sample exceeds the acceptance number for that sample, it shall be cause for rejecting the lot.

Table V - Classification of defects in accordance with MIL-STD-105

Categories	Defects
Critical:	None defined.
Major:	
	Plates
101	Finish blistered, peeled, chipped, or not as specified.
102	Burred, slivered or splintered, injurious to personnel.
103	Incorrect color.
104	Illegible debossing or stamping.
105	Inscription or description does not conform to applicable drawing or contract requirements.
106	Materials not as specified.
107	Dimensions do not meet requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects in accordance with MIL-STD-105 Cont'd

Categories	Defects
Major: (Cont'd)	
108	Marking (interior and exterior container): Omitted; incorrect; illegible; size, location or method of application incorrect.
109	Materials (container): Component missing, damaged, defective, incorrect, improper
110	Workmanship (container): Incomplete closure of case liners and container flaps; loose strapping, inadequate stapling or taping; bulging or distortion of containers.

4.4 Test procedures. Each of the sample plates selected in accordance with 4.2.3 shall be subject to the tests specified in 4.4.1 through 4.4.4. A completely marked plate shall be considered a unit of product for testing purposes. Failure of any sample to pass the test shall be cause for rejecting the lot. Types E and J shall not be subject to abrasion resistance (4.4.3).

4.4.1 Temperature test. Temperature tests shall be conducted as specified in 4.4.1.1 and 4.4.1.2. Failure of temperature test shall be evidence by flaking, peeling distortion, or illegible print.

4.4.1.1 Low temperature. The plates shall be maintained at a temperature of -54°C. (-65°F.) for a period of 3 hours.

4.4.1.2 High temperature. The plates shall be maintained at a temperature of 125°C. (275°F.) for a period of 3 hours.

4.4.2 Deterioration. Deterioration tests shall consist of the tests, specified in 4.4.2.1 through 4.4.4. Failure of deterioration tests shall be evidenced by flaking, peeling presence of oxidation, or discoloration. Slight discoloration or fading of anodized colors which do not exhibit a deleterious effect on legibility is permissible.

4.4.2.1 Water. The plates shall be submerged in tap water for a period of 12 hours at a temperature of 20°C. to 25°C. (68°F. to 77°F.).

4.4.2.2 Kerosene. The plates shall be submerged in Kerosene conforming to VV-K-211, for a period of 12 hours at a temperature of 20°C. to 25°C. (68°F. to 77°F.).

4.4.2.3 Salt spray. The completely assembled plate shall be exposed to salt spray of 20 percent Sodium chloride at approximately 35°C. (95°F.) for a period of 50 hours.

4.4.2.4 Weather. The completely assembled plate shall be exposed to a flaming carbon arc at a distance of approximately 18 inches for a period of 50 hours. The carbon used shall operate on a current of 50 to 60 amperes. A spray shall be adjusted so that the plate is sprayed with water for approximately 20 minutes of each 2 hours exposure.

4.4.2.5 Flammability. An attempt shall be made to ignite the completely assembled plate by means of an open flame. When the plate is removed from the flame, it shall not continue to burn.

4.4.3 Abrasion resistance. Using a standard abrasion apparatus with CS-17 calibrase wheels and 1,000 gram loading, the abrasion test shall be performed as outlined in Method 5306 of CCC-T-191 and consist of 500 cycles.

4.4.4 Cleaning resistance. Identification plates shall be capable of withstanding the effects of cleaning agents employed in P-C-437 and MIL-C-25769 applied by cold steam process, hose, brush, and hand-wipe for a period of 1 minute.

4.5 Examination of preparation for delivery. The lot size shall be the number of containers offered for delivery at one time. The inspection level for determining the sample size shall be S-4 of MIL-STD-105. The sample unit shall be one packed shipping container fully prepared for delivery with the exception that it has not been sealed. Each of the sample containers shall be examined to determine if the plates are packaged, packed and marked as specified herein. Defects of closure listed in table V shall be

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

used as the inspection criteria. The AQL shall be 6.5 percent defects per hundred units, fully prepared for delivery.

5. PREPARATION FOR DELIVERY

(The preparation for delivery requirements specified herein apply only for direct Government procurements. Preparation for delivery requirements of referenced documents listed in Section 2 do not apply unless specifically stated in the contract or order. Preparation for delivery requirements for products procured by contractors shall be specified in the individual orders.)

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each plate of the same type and size shall be individually wrapped by any suitable means and packaged in accordance with method III of MIL-P-116 in unit quantities as specified by the procuring activity.

5.1.2 Level C. Plates shall be packaged in a manner that will afford protection against physical damage during shipment from the supply source to the first receiving activity.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Plates packaged as specified in 5.1 shall be packed in overseas shipping containers conforming to PPP-B-636. Containers shall be of uniform shape and size, minimum cube and tare consistent with the protection required and shall contain identical quantities. The specific quantity or the specific weight limitation of the shipping container shall be as specified by the procuring activity (see 6.2). Container shall be provided with a case liner conforming to MIL-L-10547, except that case liners shall not be required for containers conforming to PPP-B-636, type CF or SF, weather-resistant class when sealed at all joints and seams including manufacturer's joints, with tape conforming to PPP-T-60, class 1.

5.2.2 Level B. Plates packaged as specified in 5.1 shall be packed in domestic shipping containers conforming to PPP-B-636. Containers shall be of uniform shape and size, minimum cube and tare consistent with the protection required and shall contain identical quantities. The specific quantity or the specific weight limitation of the shipping container shall be as specified by the procuring activity (see 6.2).

5.2.3 Level C. Plates packaged as specified in 5.1 shall be packed in a manner which will afford adequate protection against damage during direct shipment from the supply source to the first receiving activity. Containers shall conform to the Uniform Freight Classification Rules or other carrier regulations as applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, interior or exterior containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The plates covered in this specification are intended for use as identification plates and information plates for use on ships material, and on aircraft and missile equipment, accessories and parts.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Whether an identification or information plate is required and the type (see 1.2).
(c) Color of filler for metal plates (see 3.3.4.1).
(d) Material required (see 3.4.1).
(e) Color of cores and cover sheets (see 3.4.1.2).
(f) Size number (see 3.5.1).
(g) Thickness of type D plates (see 3.7.4.3).
(h) Photographic process for type II plates (see 3.7.8.2).
(i) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(j) Quantity or weight limitations of the shipping container (see 5.2.1 and 5.2.2).

6.2.1 Procurement documents for turbines and gears need specify only title, number and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.

6.3 Supersession data. This specification includes the requirements of MIL-P-6906A Plates, Information and Identification dated 2 April 1962.

6.3.1 The types listed in table I of this specification correspond to those in MIL-P-15024B(SHIPS) except for the following:

MIL-P-15024B(SHIPS)	This specification
Type G - Decalcomanias or adhesive backed metal foil	Type G - Adhesive backed metal foil*
----------	Type J - Identification tag - added

*Decalcomanias should be procured in accordance with MIL-D-8634.

6.4 CHANGES FROM PREVIOUS ISSUE. THE OUTSIDE MARGINS OF THIS DOCUMENT HAVE BEEN MARKED "#" TO INDICATE WHERE CHANGES (DELETIONS, ADDITIONS, ETC.) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS HAS BEEN DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT AS WRITTEN IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

Custodians:
Army - GL
Navy - EC
Air Force - 84


Review activities:
Army - GL, ME
Navy - SH, EC
Air Force - 84
Defense Supply Agency - GL

User activities:
Army - MI
Navy - AS, OS, CG, MC
Air Force - None

Preparing activity:
Navy - EC
(Project 9905-0066)

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-18T05:23Z
Check the source to verify that this is the currentversion before use.

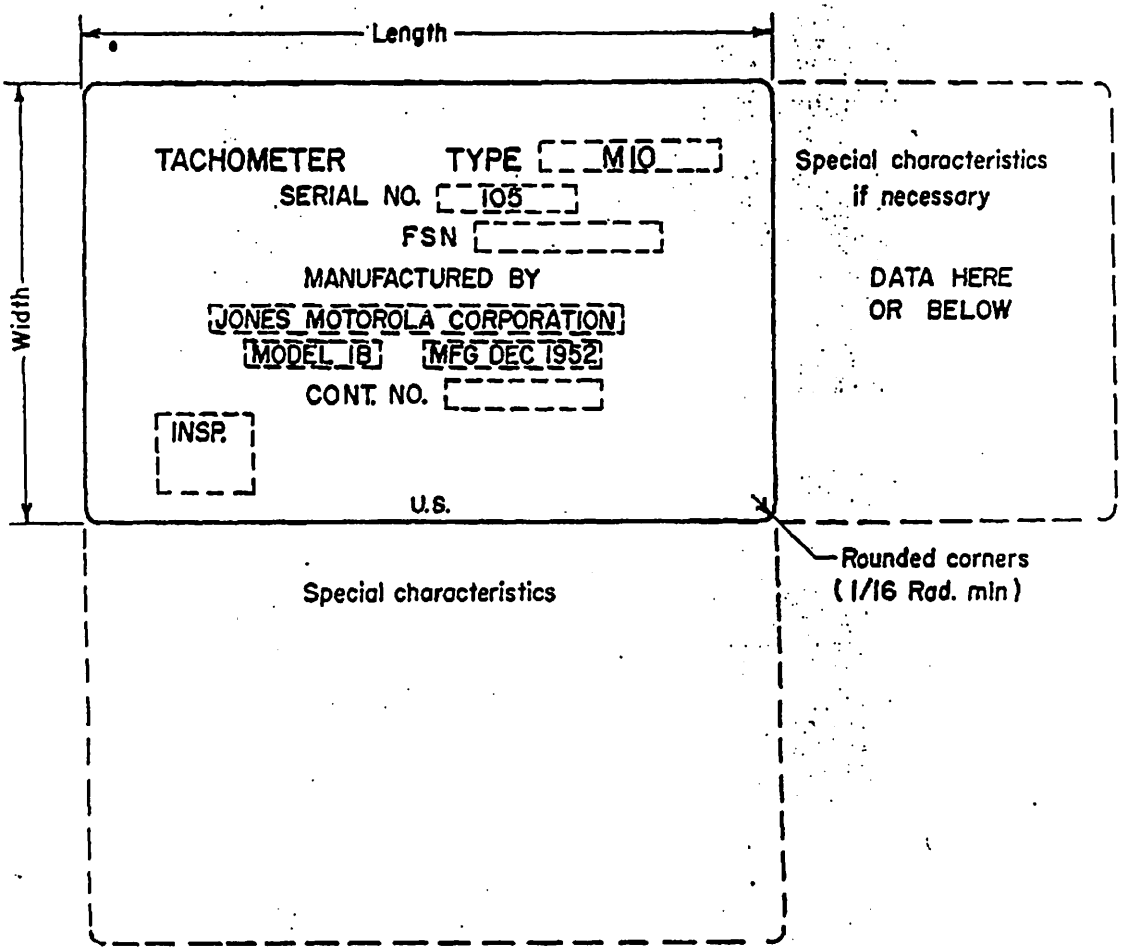

NOTE: Items such as stock number and serial number may be omitted if not required by the procuring activity.

SH 126A

Figure 1 - Basic arrangement.

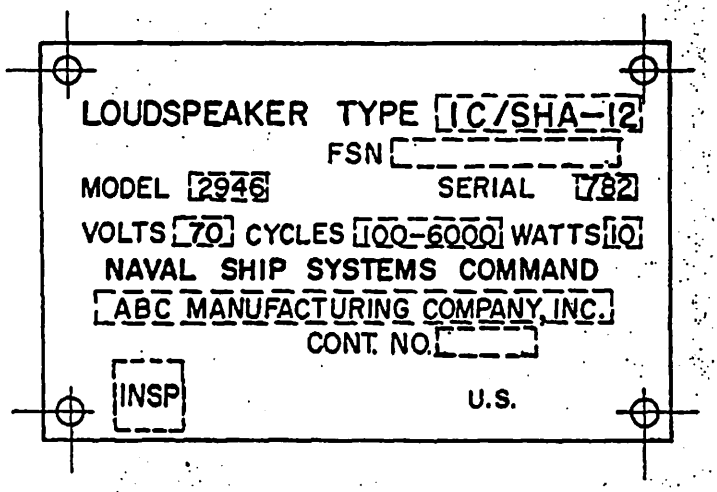


Figure 2 A.—Typical unit.

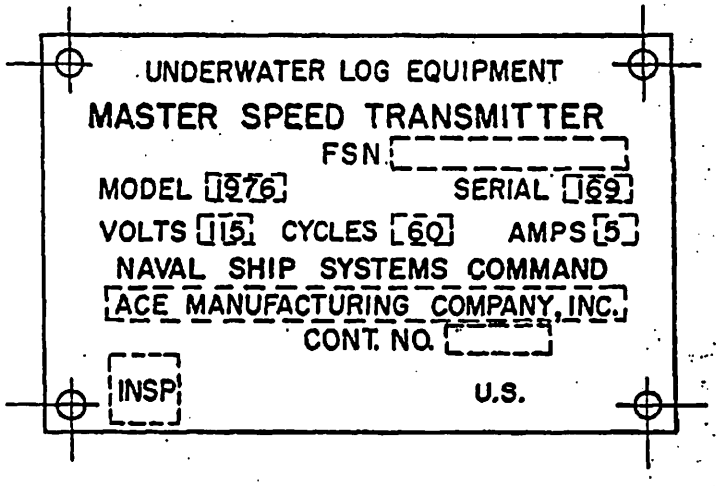


Figure 2 B.—Typical set.

SH 127A

Figure 2.—Typical identification plates for electrical equipment.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.

FIGURE 3.- TYPICAL ILLUSTRATIONS OF IDENTIFICATION PLATES FOR ELECTRONIC EQUIPMENT.

NOTE: Dimensions and other information on illustrations show typical proportions and spacing. The square is the space for inspectors stamp. Information may be added or deleted as required by the procuring activity.

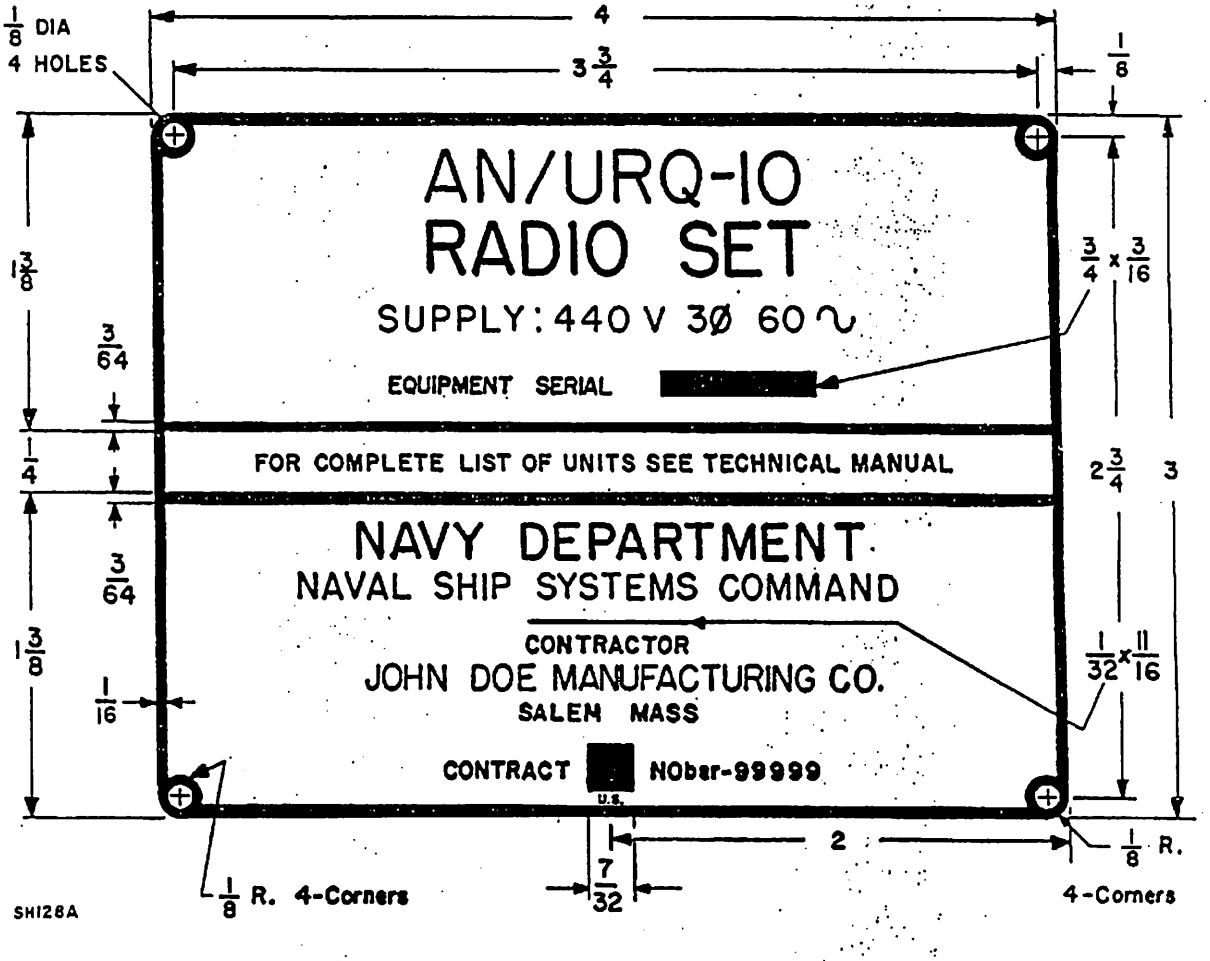


Figure 3A.- Set.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

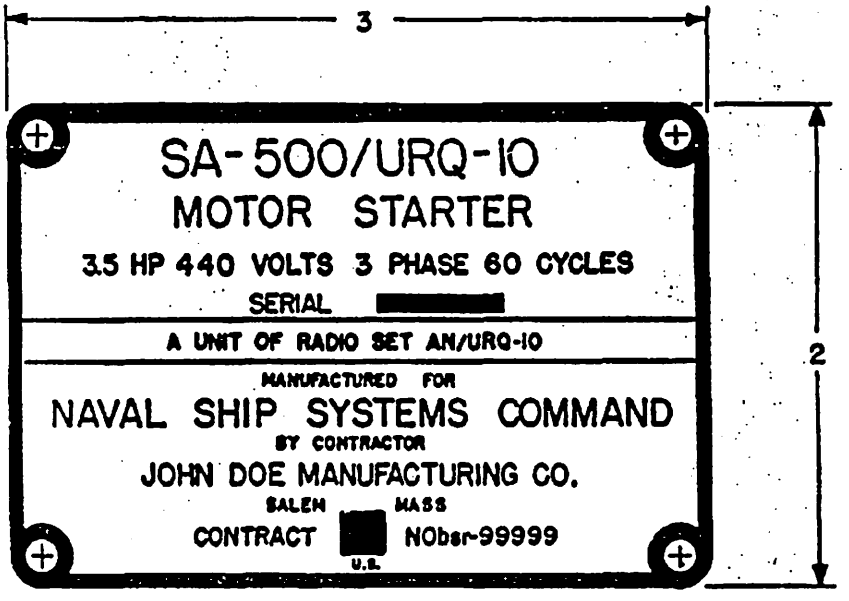


Figure 38.- Unit.


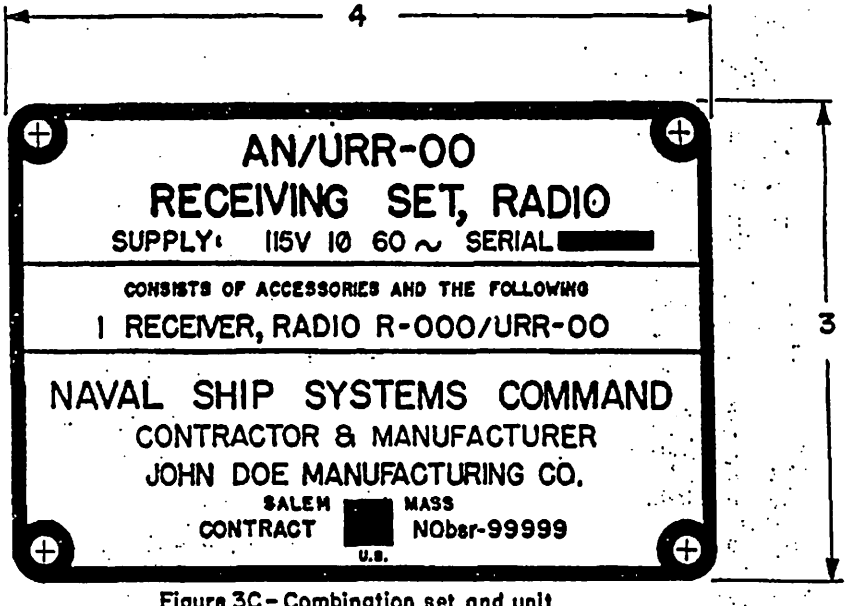



Figure 3C - Combination set and unit.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

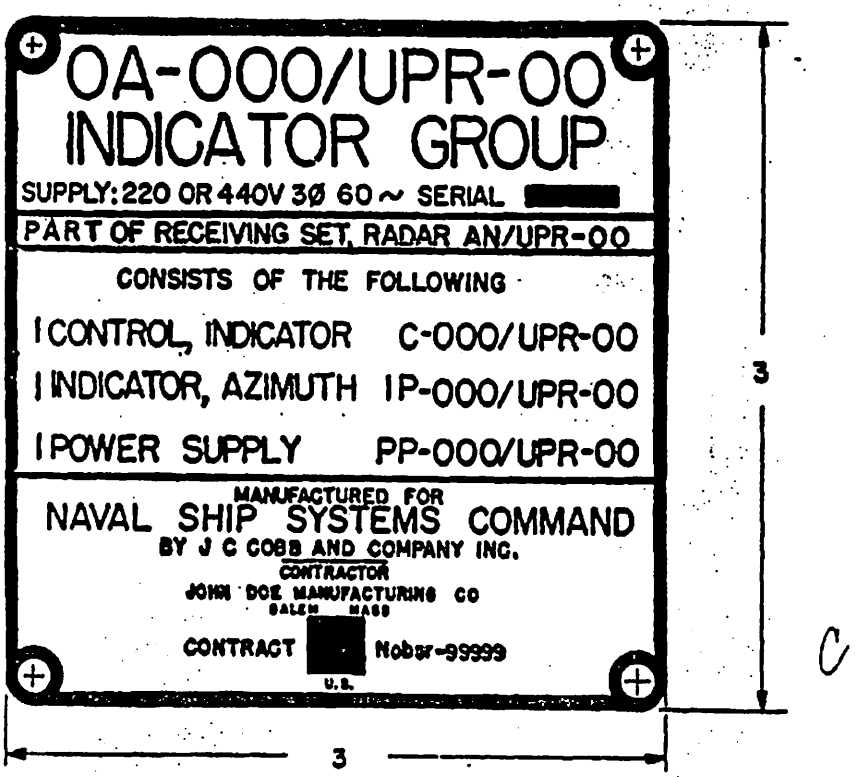

SH 1865

Figure 3D - Group.

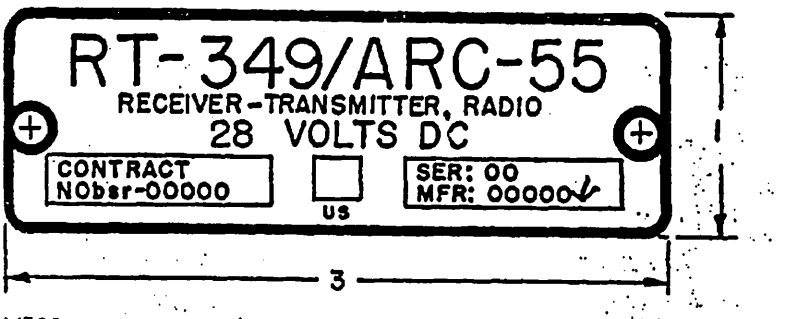

SH 130C

Figure 3E - Unit. (For limited space and airborne equipment.)


[1]Use Federal supply code for manufacturers (cataloging Handbook H4) published by the Defense Supply Agency.

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:23Z
Check the source to verify that this is the current version before use.

MODIFIED TO RADIO SET AN/SRC-00
BY ADDITION OF FIELD CHANGE #00
UNDER CONTRACT NObsr-00000

Figure 3F.- Modification plate.
NOTE: The length of the modification plate shall be the same as that of the plate in whose vicinity the modification plate will be used.


SH 8448

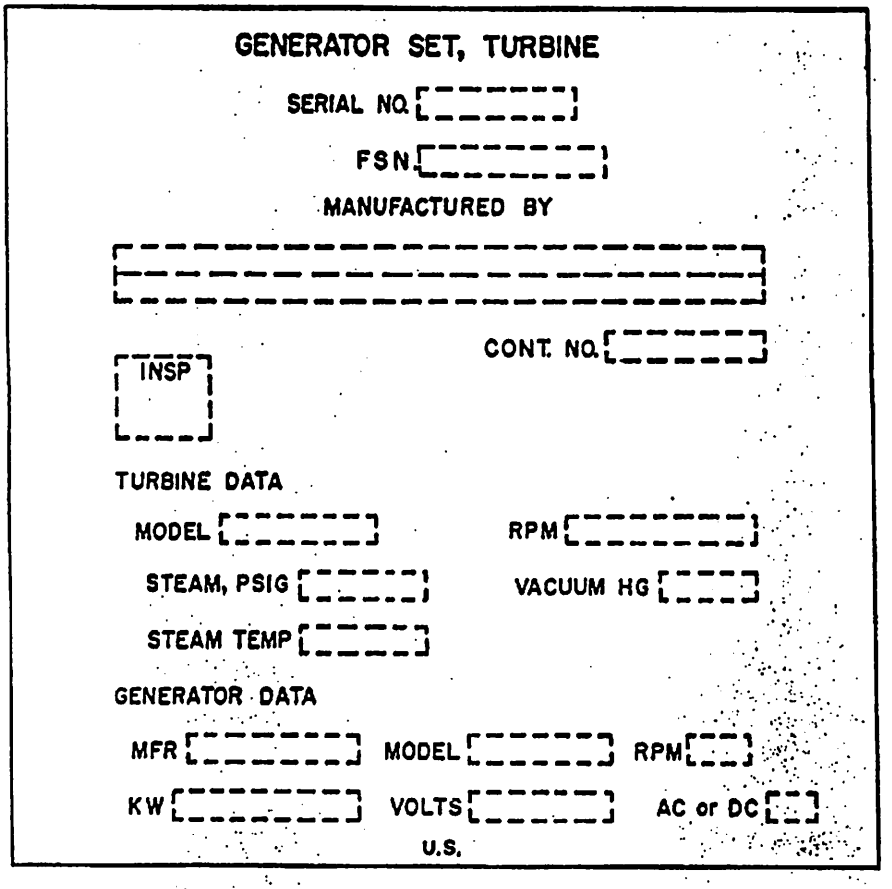

SHI31A

Figure 4A.—Typical generator set.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

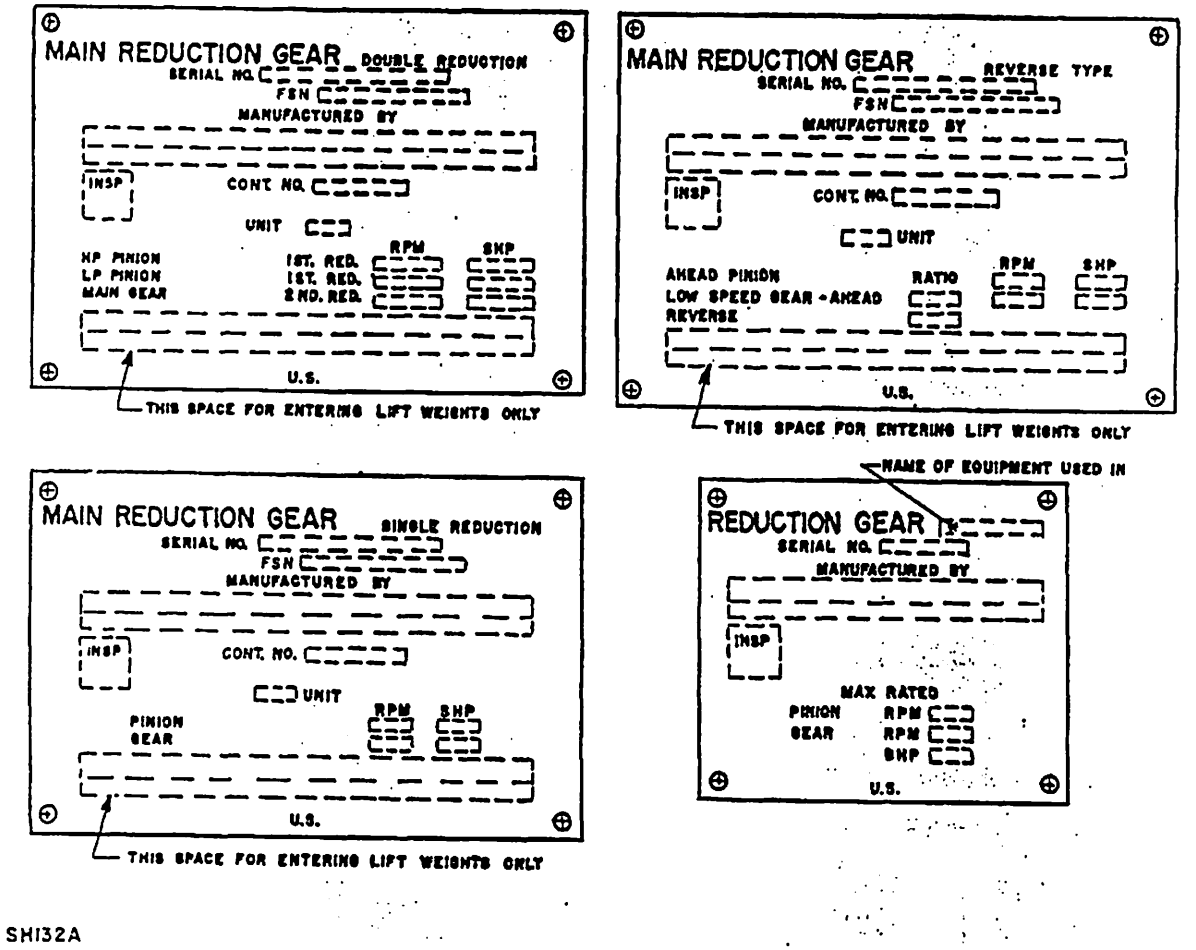


SHI32A


Figure 4B.–Typical reduction gears.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.


IDENTIFICATION PLATE FOR COMBINED LP AND ASTERN TURBINE

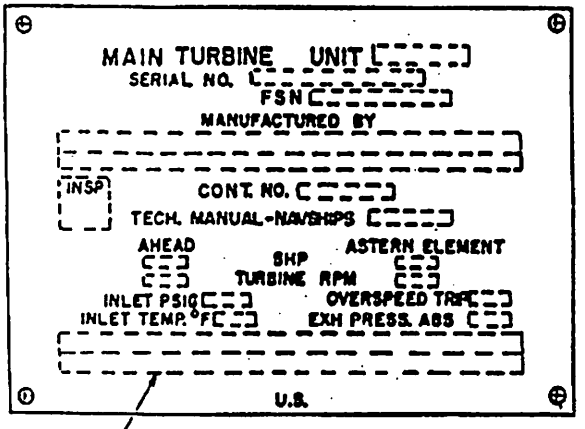


IDENTIFICATION PLATE FOR AUXILIARY TURBINE

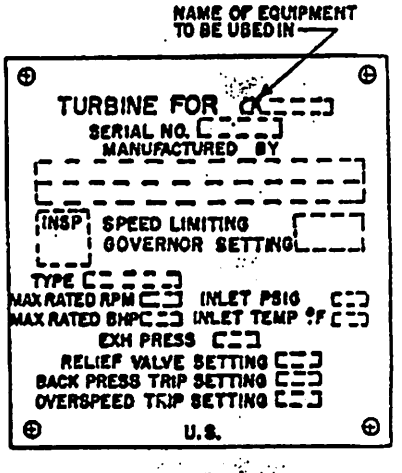

IDENTIFICATION PLATE FOR CRUISING, HP AND HP-IP TURBINE

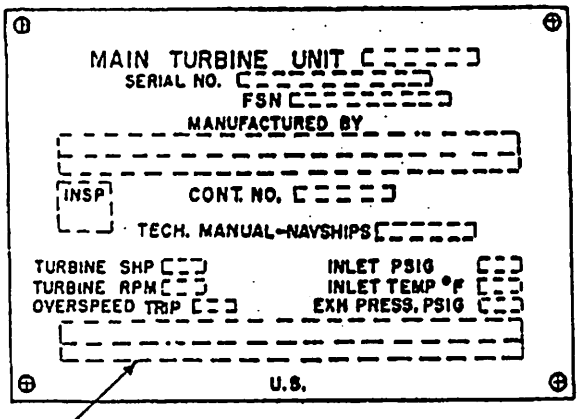

IDENTIFICATION PLATE FOR SINGLE CASING (GEARED OR ELECTRIC DRIVE) TURBINE

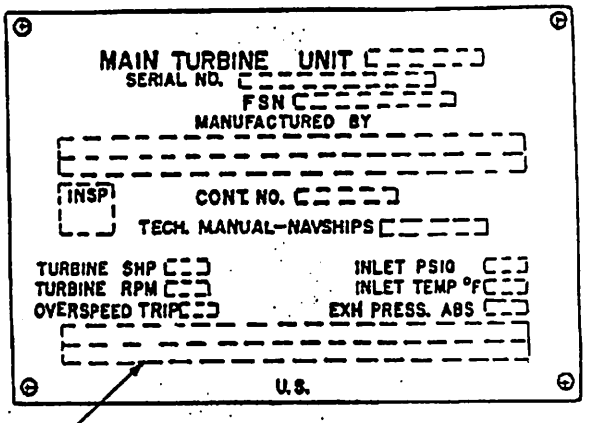

SH66C

FIGURE 4C - TYPICAL TURBINES.

NOTE:


(1) All terminal conditions stamped on identification plates are for design full power, except for values of the separate cruising turbine which shall be for maximum cruising condition.


(2) Each pressure stamped on an identification plate must, unless already apparent on plate, indicate the unit of pressure and whether or not value stamped is absolute, i.e. 25 in. hg., 10 p.s.i.g., etc.

(3) The overspeed trip r.p.m. shall be entered in the appropriate block only for turbines equipped with overspeed trips.

(4) For nuclear applications, the ranges of inlet pressures and temperatures shall be entered in the appropriate blocks.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

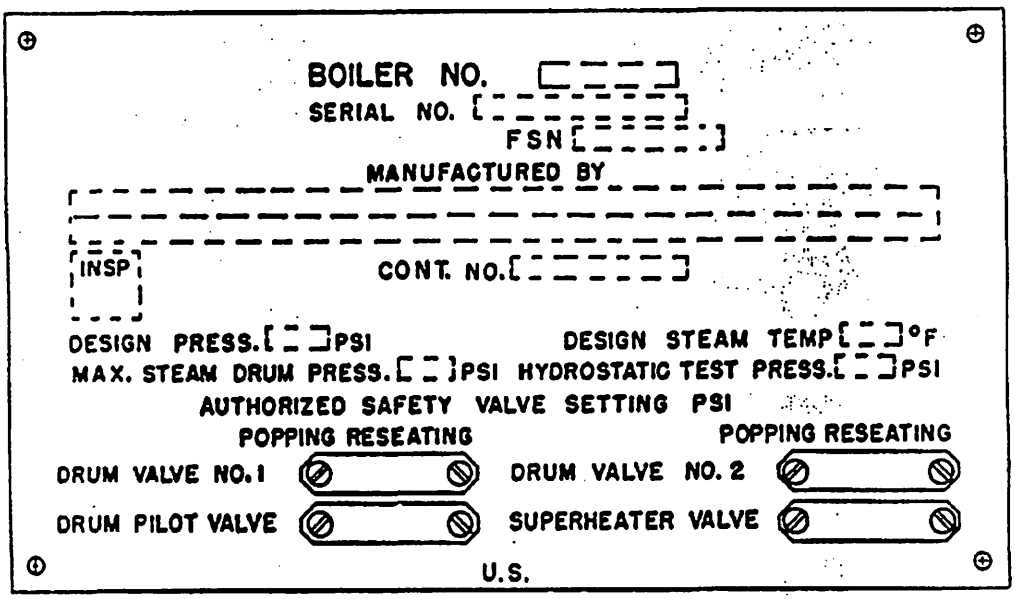


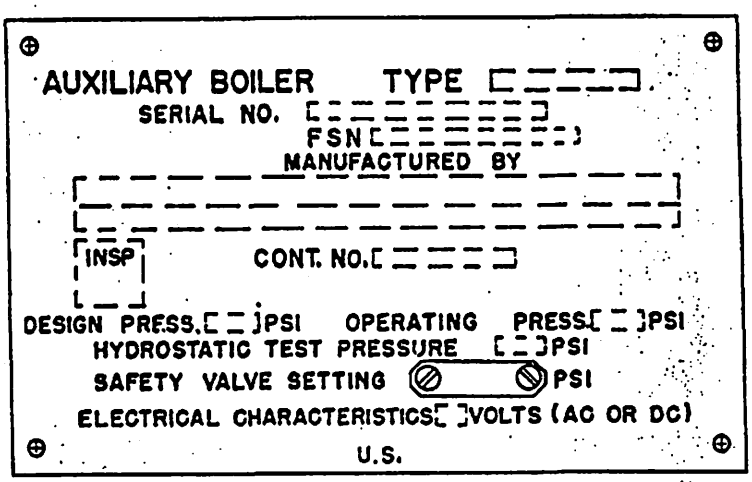


SH133A

Figure 4D. -Typical boilers

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

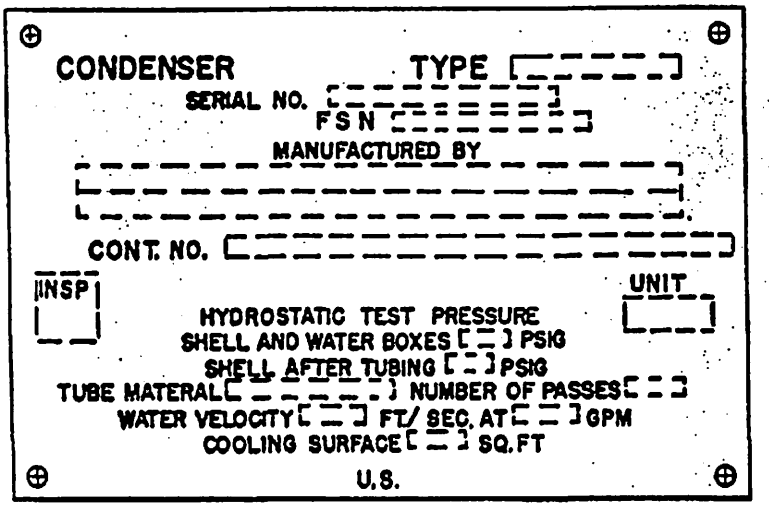

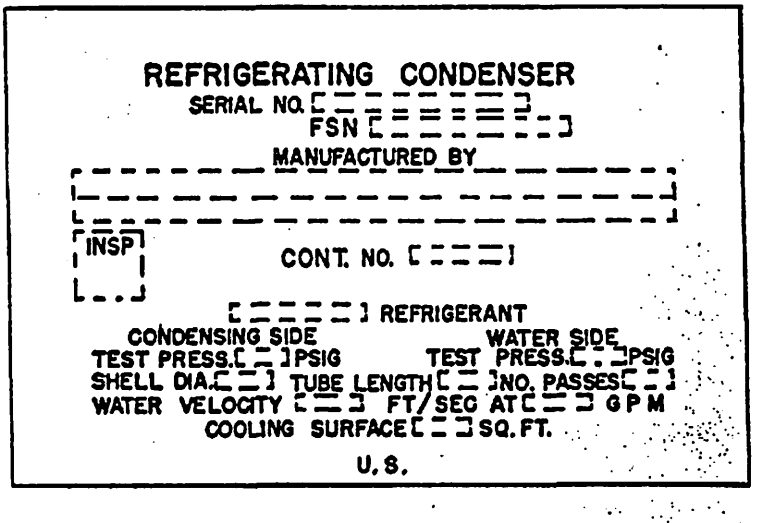

Note: Identification plates shall be soft soldered to tank or receiver.

SH134A

Figure 4 E.—Typical condensers.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.


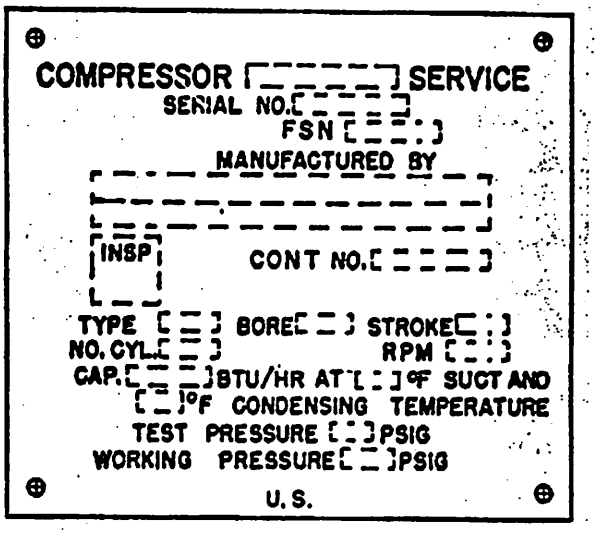


Figure 4F.-Typical compressor.

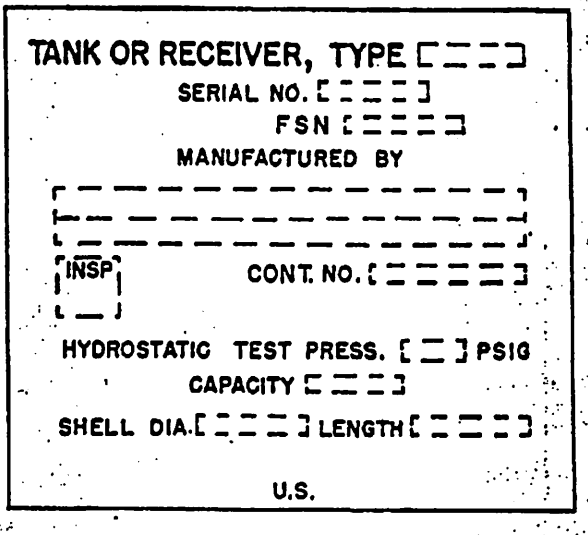

Note: Identification plate shall be soft soldered to tank or receiver.

SH135A

Figure 4G.-Typical tank or receiver.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

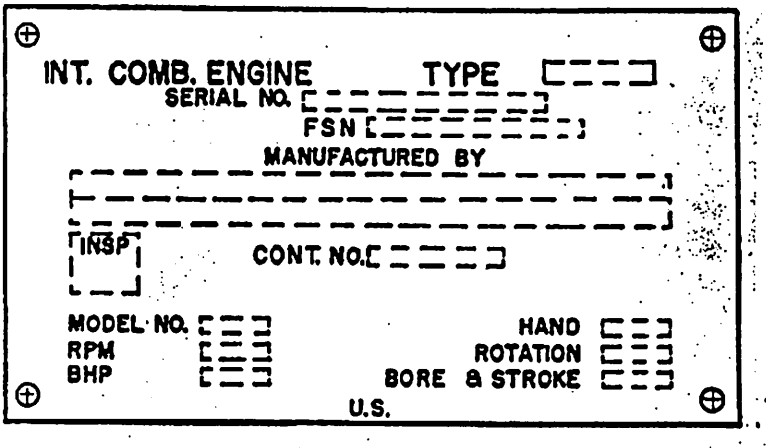


Figure 4H.—Typical diesel engine.

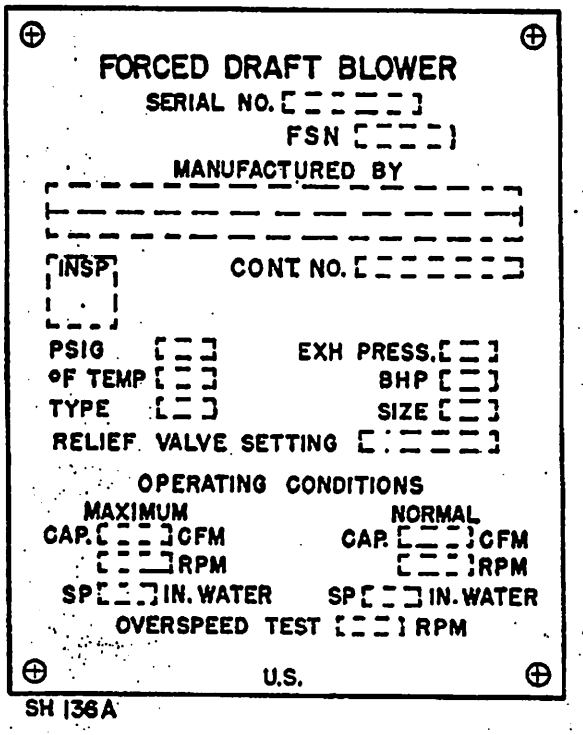


Figure 4J.—Typical forced-draft blower.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.

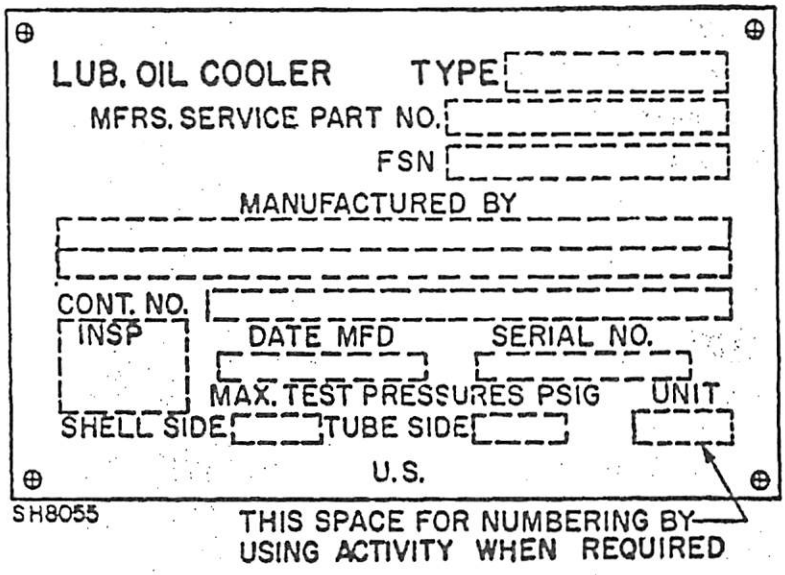


FIGURE 4K.—TYPICAL COOLER OR HEATER. TO BE USED FOR LUB. OIL COOLERS, HEATERS, FRESH WATER COOLERS, FUEL OIL HEATERS, COOLERS.

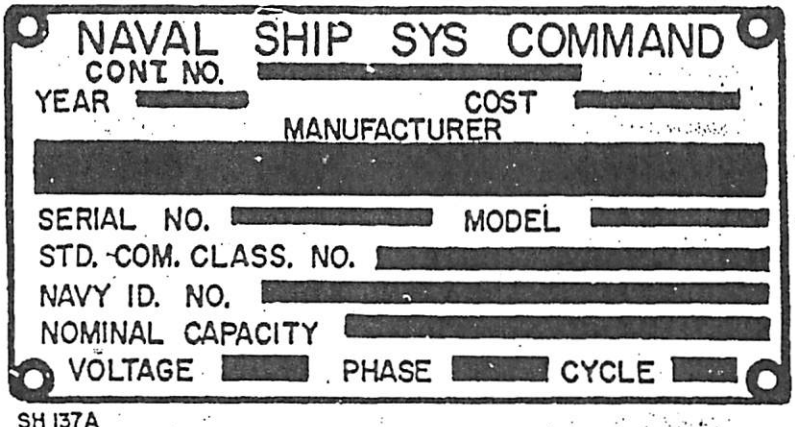


Figure 5.—Typical machine tools and Industrial Shop Equipment.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:23Z
Check the source to verify that this is the current version before use.