
This document has been approved for public release and sale; its distribution is unlimited.

MILITARY SPECIFICATION SHEET

PLATES, IDENTIFICATION

The complete requirements for procuring identification plates described herein shall consist of this document and the latest issue of MIL-P-15024.

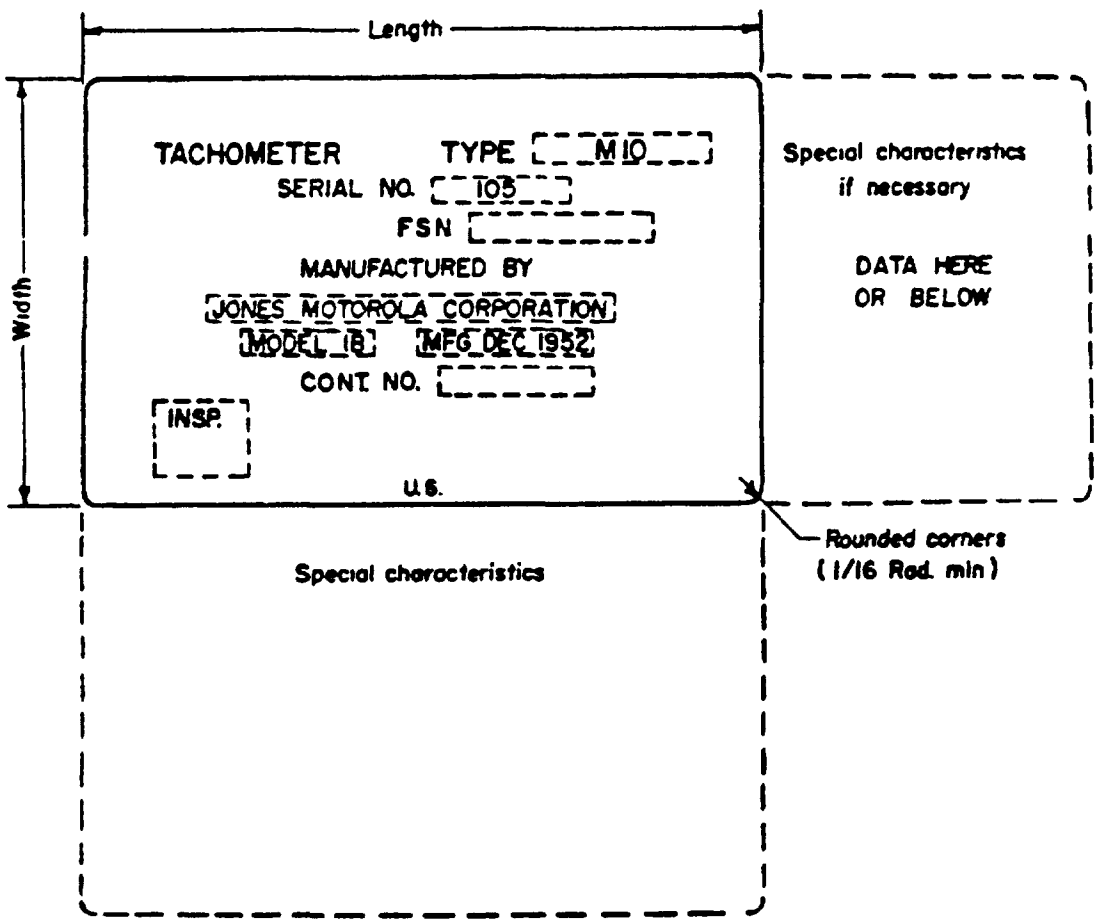

NOTE: Items such as stock number and serial number may be omitted if not required by the procuring activity.

Figure 1 - Basic arrangement.

FSC 9905

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

Figure 2 - Typical identification plates for electrical equipment.

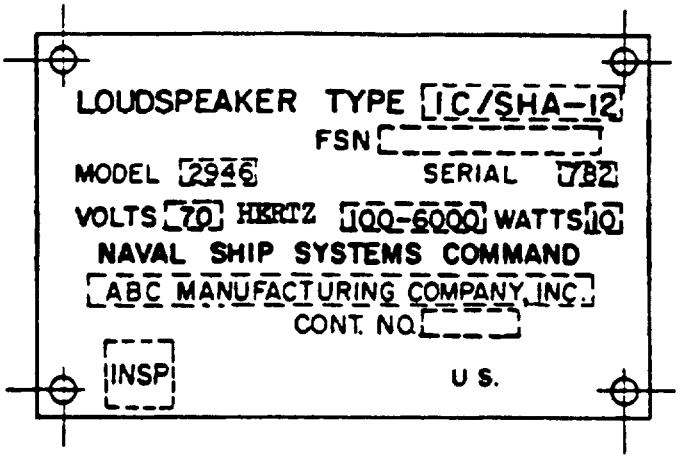


Figure 2A - Typical unit.

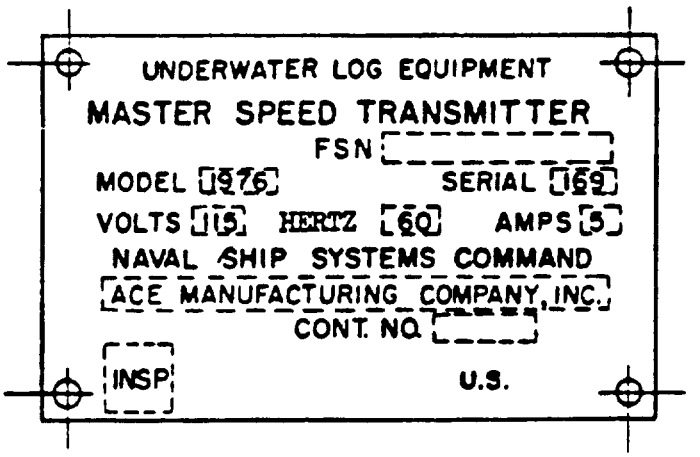


Figure 2B - Typical set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

Figure 3 - Typical illustrations of identification plates for electronic equipment.

NOTE: Dimensions and other information on illustrations show typical proportions and spacing. The square is the space for inspector's stamp. Information may be added or deleted as required by the procuring activity.

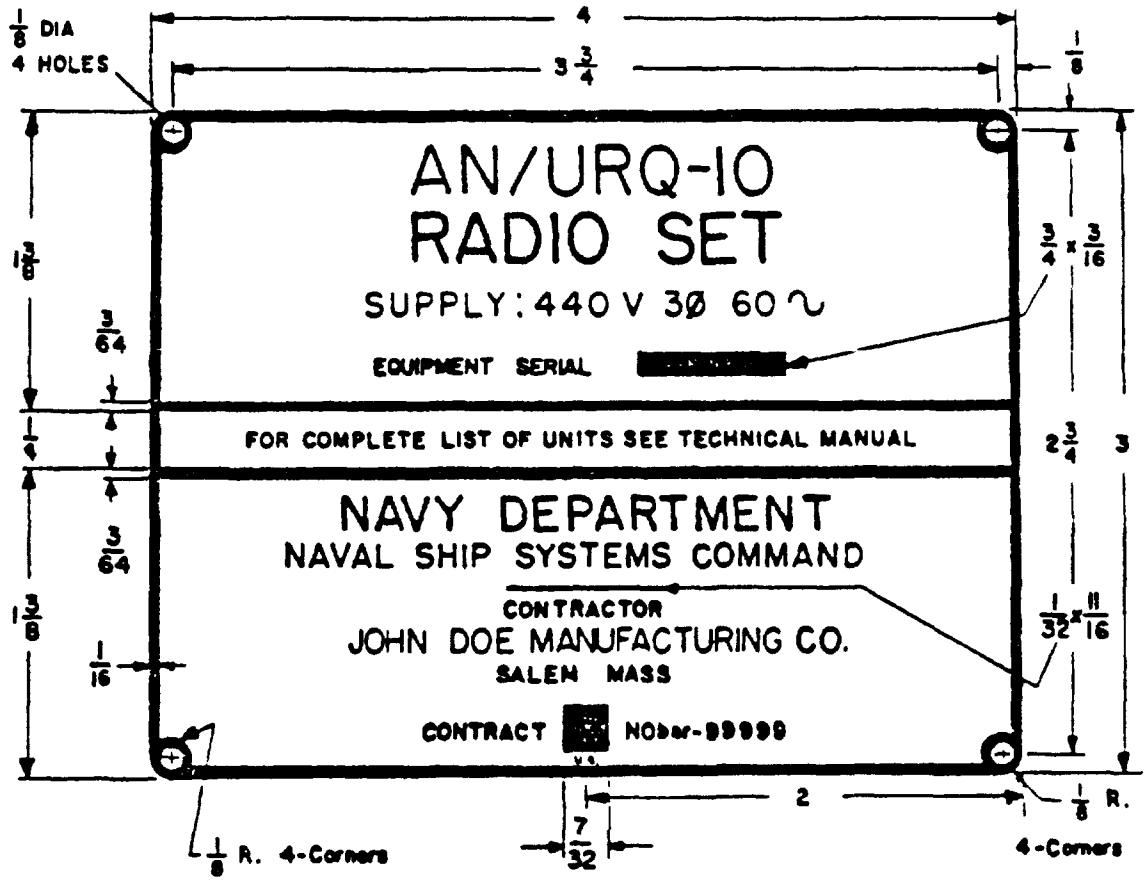


Figure 3A - Set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

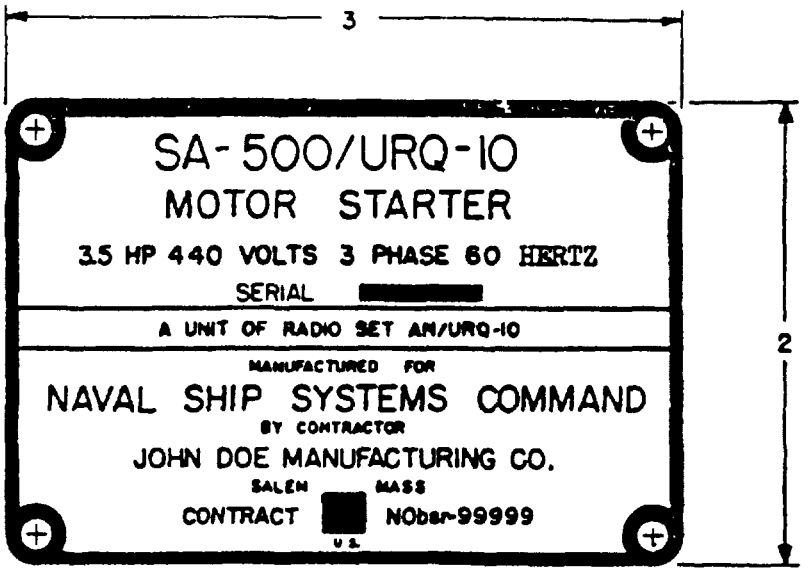


Figure 3B - Unit.

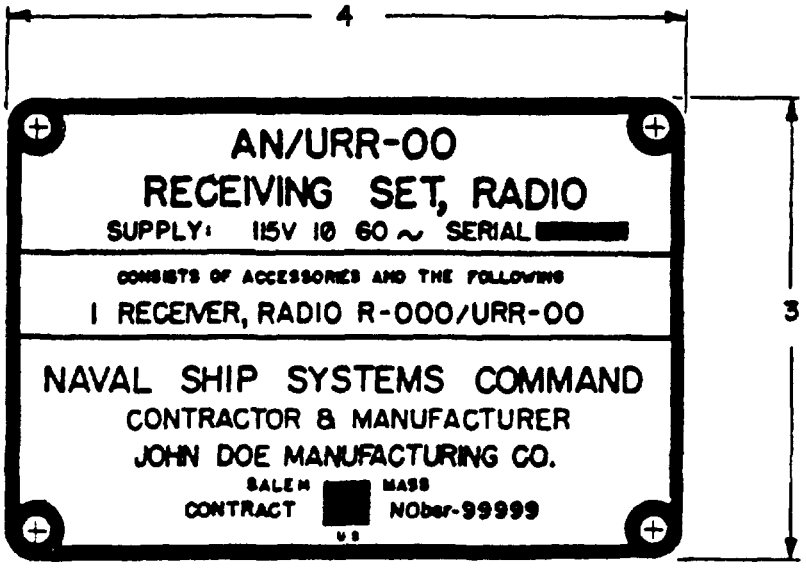


Figure 3C - Combination set and unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.


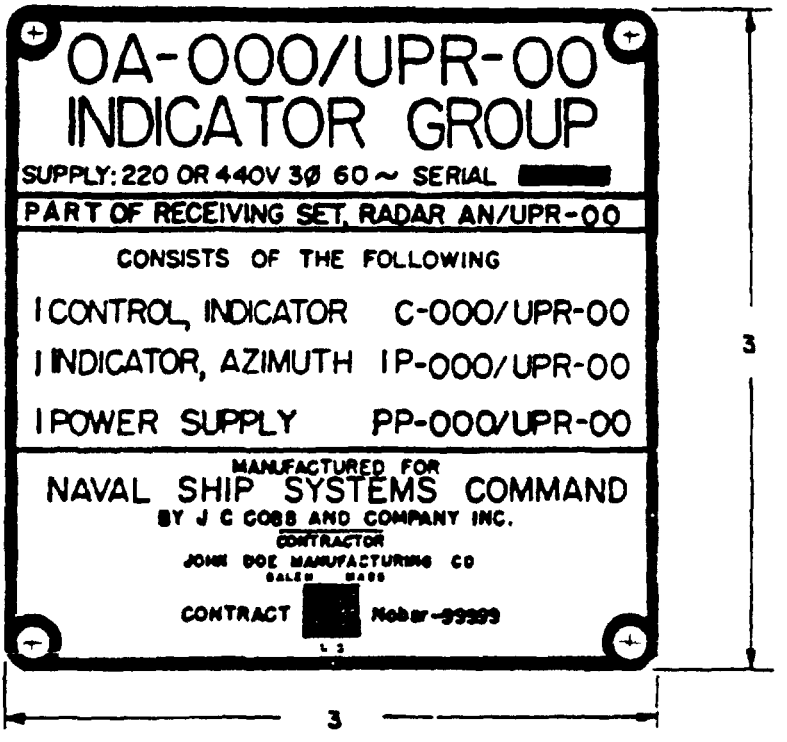


Figure 3D - Group.



NOTE The length of the modification plate shall be the same as that of the plate in whose vicinity the modification plate will be used.

Figure 3E - Modification plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

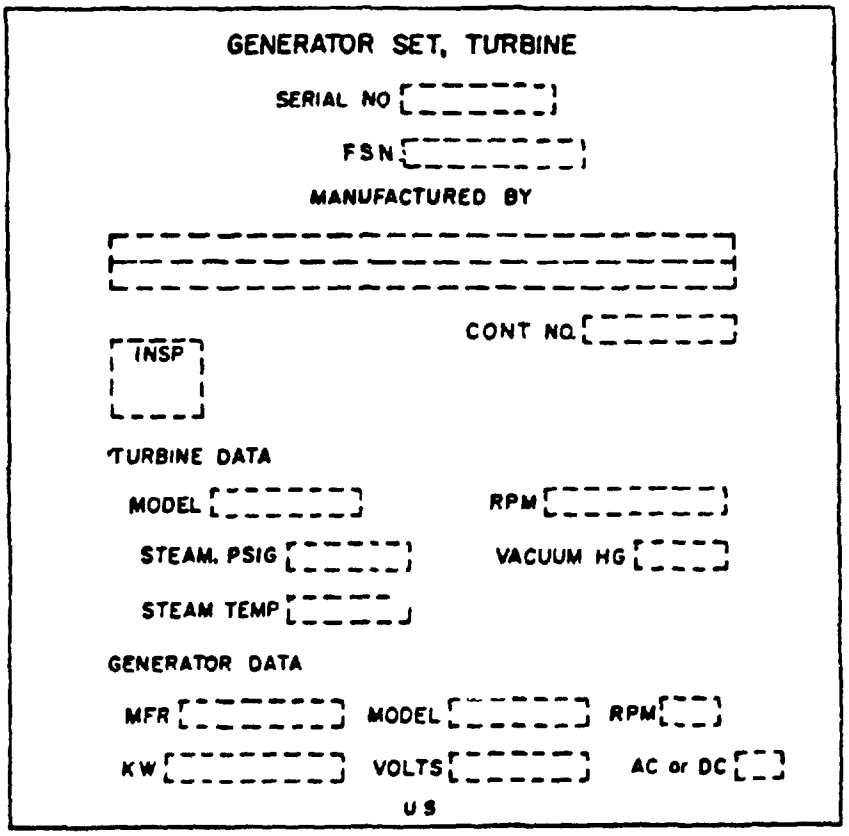


Figure 4A - Typical generator set.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.


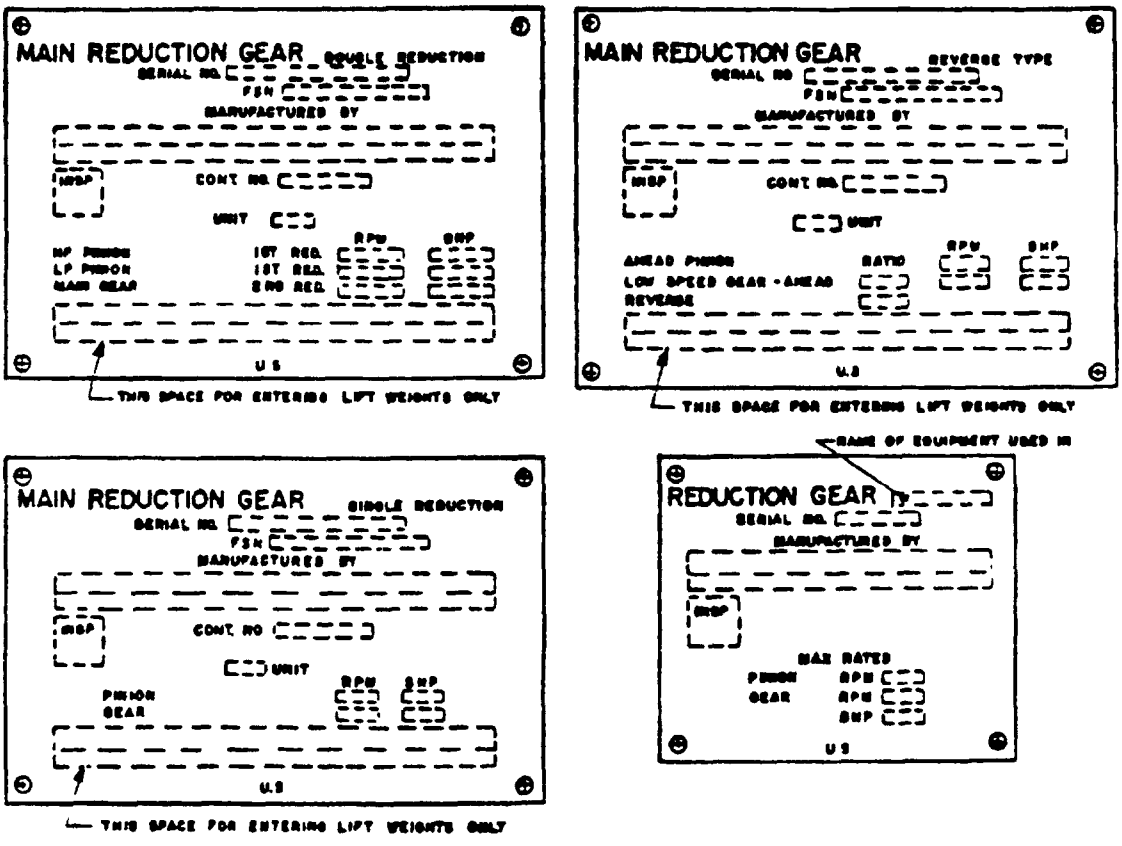



Figure 4B - Typical reduction gears.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.


IDENTIFICATION PLATE FOR COMBINED LP AND ASTERN TURBINE

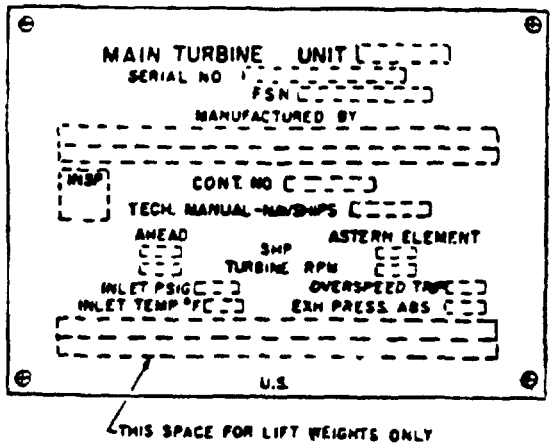


IDENTIFICATION PLATE FOR AUXILIARY TURBINE

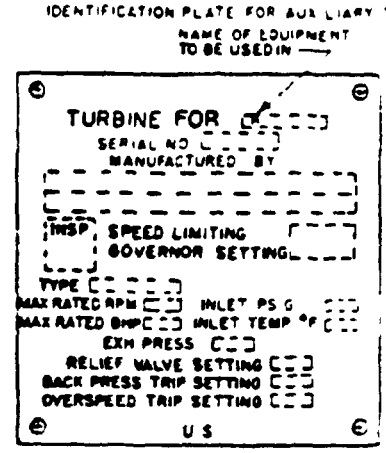

IDENTIFICATION PLATE FOR CRUISING, HP AND HP-IP TURBINE

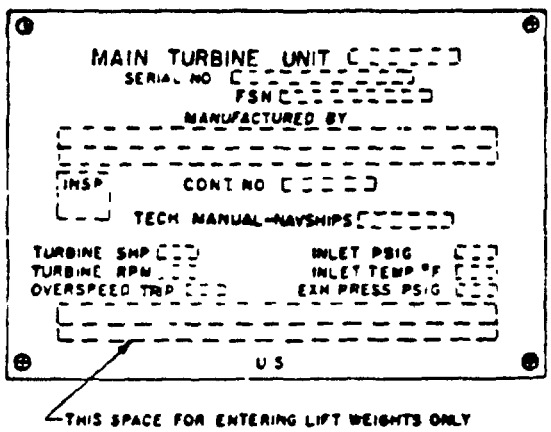

IDENTIFICATION PLATE FOR SINGLE CASING (GEARED OR ELECTRIC DRIVE) TURBINE

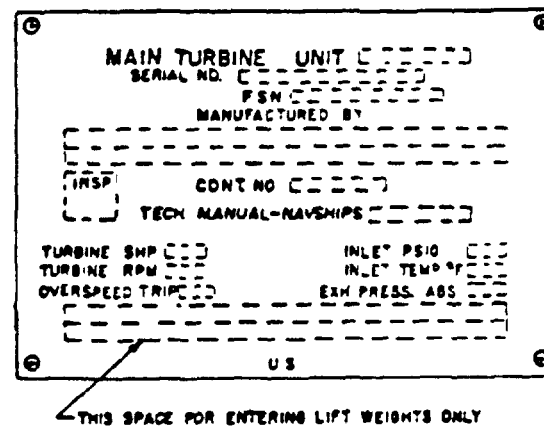


NOTES:

1. All terminal conditions stamped on identification plates are for design full power, except for values of the separate cruising turbine which shall be for maximum cruising condition.
2. Each pressure stamped on an identification plate must, unless already apparent on plate, indicate the unit of pressure and whether or not value stamped is absolute, i.e., 25 in. hg., 10 p.s.i.g., etc.
3. The overspeed trip r.p.m. shall be entered in the appropriate block only for turbines equipped with overspeed trips.
4. For nuclear applications, the ranges of inlet pressures and temperatures shall be entered in the appropriate blocks.

Figure 4C - Typical turbines.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

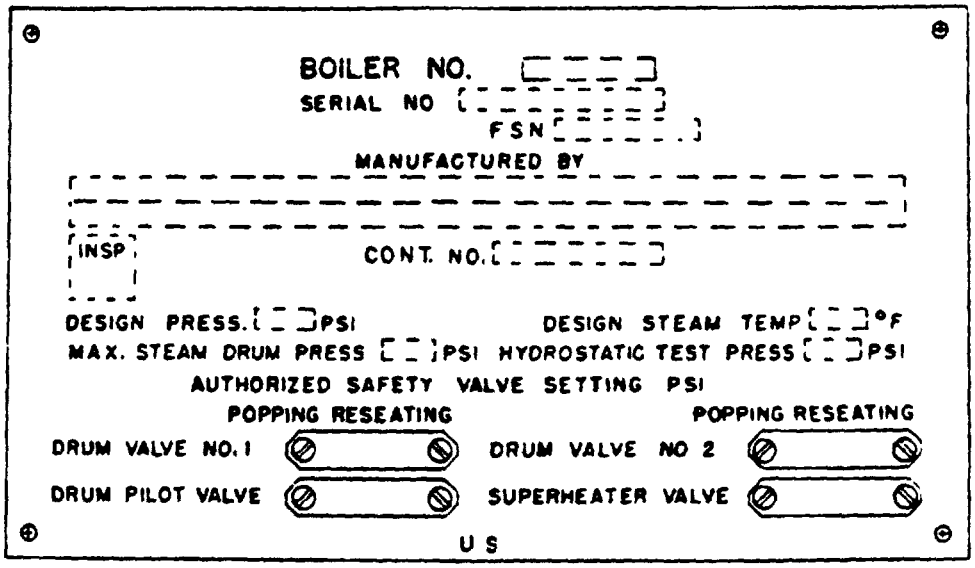


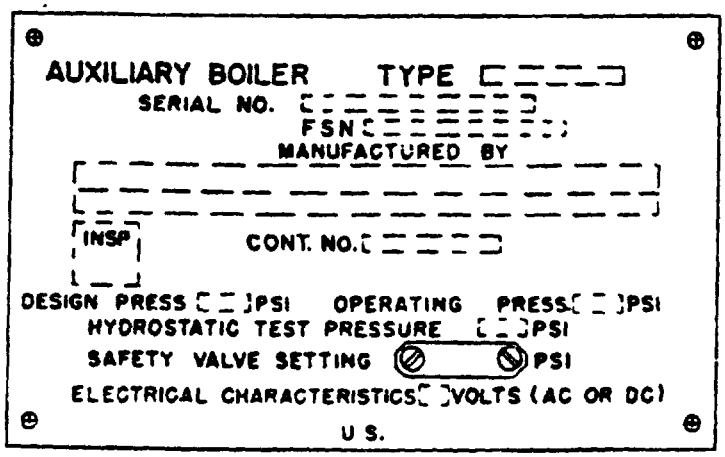


Figure 4D - Typical boilers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

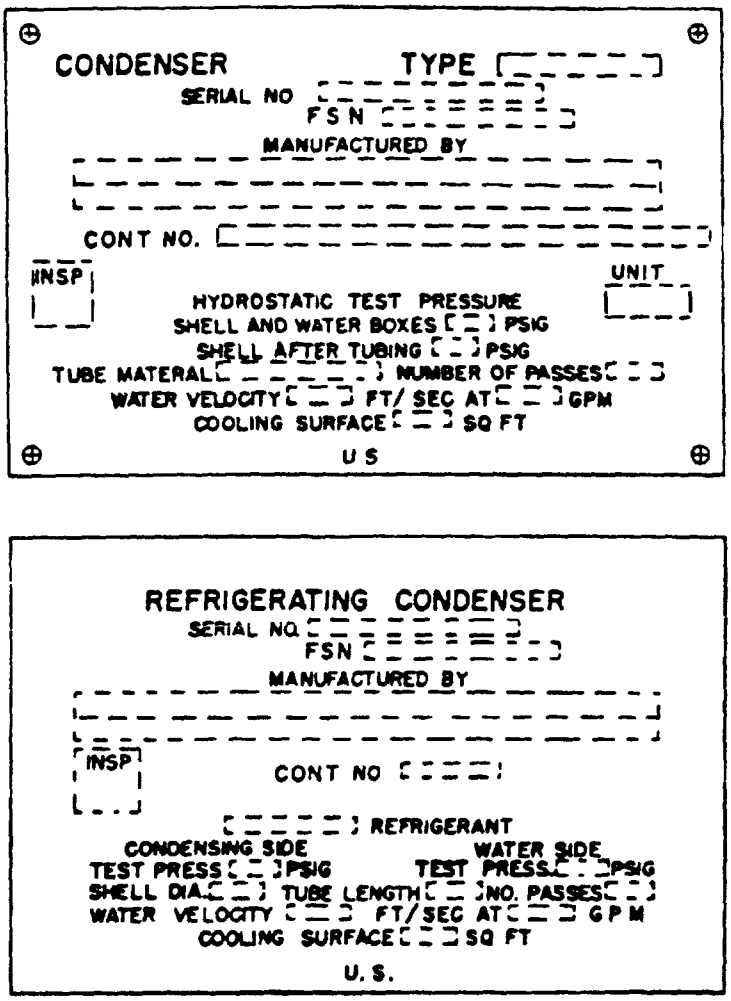

Note: Identification plates shall be soft soldered to tank or receiver

Figure 4E - Typical condensers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.


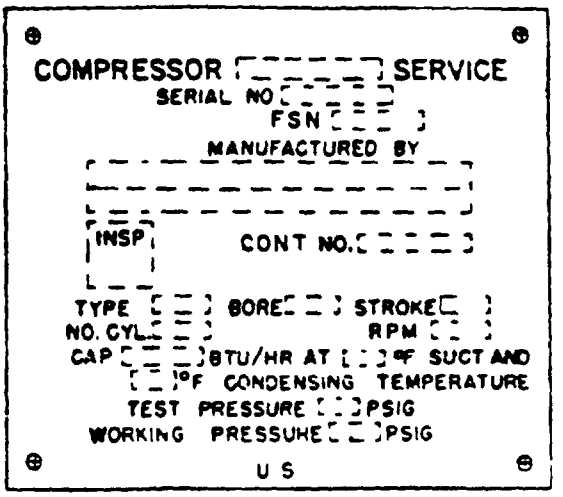


Figure 4F - Typical compressor.

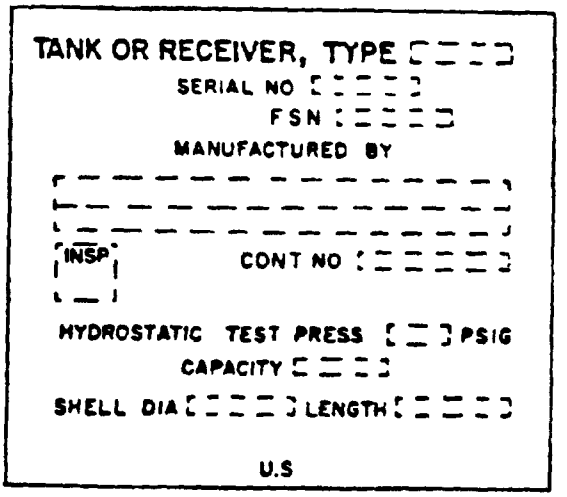

Note: Identification plate shall be soft soldered to tank or receiver

Figure 4G - Typical tank or receiver.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

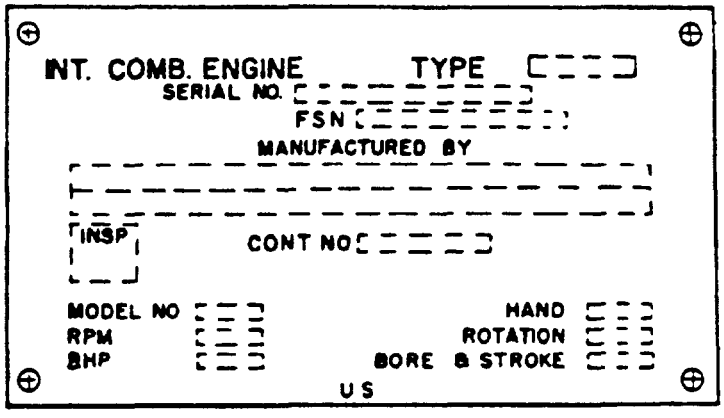


Figure 4H - Typical diesel engine.

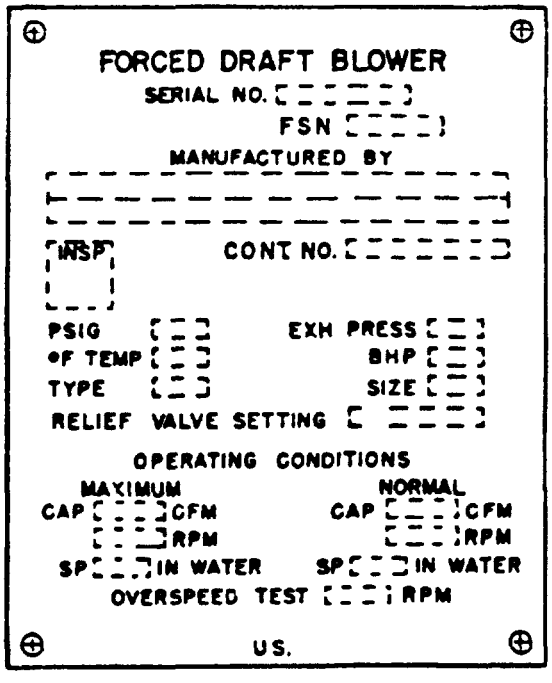


Figure 4J - Typical forced draft blower.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

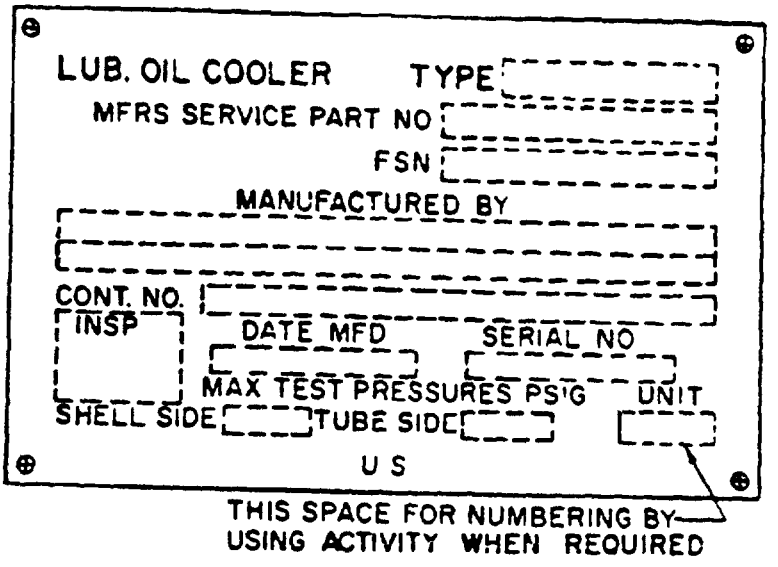


Figure 4K - Typical cooler or heater, to be used for lub. oil coolers, heaters, fresh water coolers, fuel oil heaters, coolers.

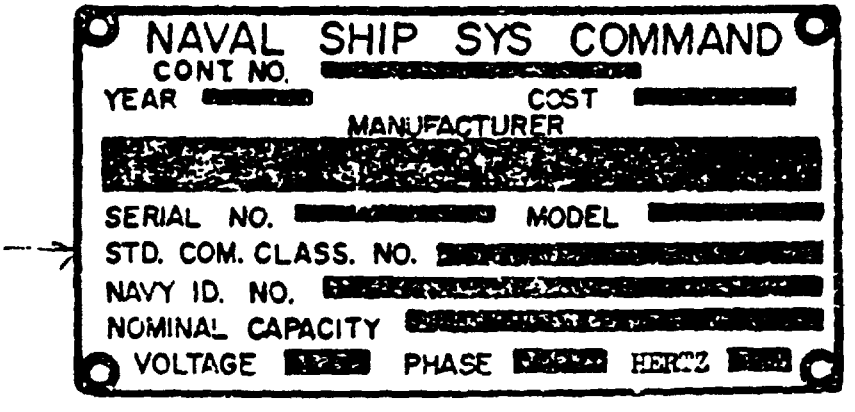


Figure 5 - Typical machine tools and industrial shop equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. Marking format and information: See figures 1 through 5.
2. Service use: Plates shall be designed for normal service or severe service, as specified by the procuring activity.

(a) Normal service plates: The requirements for normal service plates shall be as specified in MIL-P-15024, types A through H.
(b) Severe service plates: The requirements for severe service plates shall be as specified in MIL-P-15024, types A, B, C, D and H except as follows:

(1) Materials: Except as permitted by equipment specifications, aluminum shall not be used for severe service plates. In addition to the other materials listed, nickel-copper alloy in accordance with QQ-N-281 may be used.
(2) Additional information: Additional information steel stamped on severe service plates shall be not less than 0.007 inch deep for corrosion-resisting steel plates, and not less than 0.015 inch deep for nickel-copper, brass, or aluminum alloy plates.
(3) Marking: In addition to the normal information required, each metallic severe service plate shall contain the words "DO NOT POLISH", except that for small plates mounted in a group, a separate plate of the same type and material shall be provided with the inscription "DO NOT POLISH METALLIC LABEL PLATES", in lieu of inscribing "DO NOT POLISH" on each plate.
(4) Safety and warning information: Safety and warning information on severe service plates shall be filled with red enamel paint.
(5) Etching and stamping: For severe service plates, etching shall be not less than 0.007 inch deep for corrosion-resisting steel plates, and not less than 0.015 inch deep for nickel-copper, brass, or aluminum alloy plates. For type C severe service plates, stamping shall be not less than .007 inch deep for corrosion-resisting steel plates and not less than .030 inch for nickel-copper, brass, or aluminum alloy plates.
(6) Dimensions of engraved or stamped severe service plates: The dimensions of engraved or stamped severe service plates shall be as follows.

Plate material	Minimum depth of engraving	Minimum thickness of plate
	(Inch)	(Inch)
Plastic	0.003	0.0625
Brass or aluminum alloy	0.030	0.045
Nickel-copper-alloy	0.030	0.045
Corrosion-resisting-steel	0.007	0.030

3. Color style: The color style selected by the contractor shall be III or IV whichever is least costly to the Government for the particular application.
4. Ordering data: Specify whether for normal or severe service.

Preparing activity:
Navy - SH
(Project 9905-0178-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:24Z
Check the source to verify that this is the current version before use.